


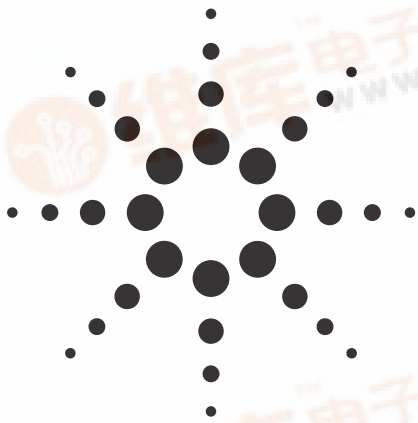

# Agilent HLMP-ABxx, HLMP-BBxx, HLMP-ADxx, HLMP-BDxx, HLMP-AGxx, HLMP-BGxx, HLMP-ALxx, HLMP-BLxx, HLMP-AMxx, HLMP-BMxx T-1<sup>3</sup>/<sub>4</sub> (5 mm) Oval Precision Optical Performance AlInGaP and InGaN Lamps

## Data Sheet

### Description

These Precision Optical Performance Oval LEDs are specifically designed for full color/video and passenger information signs. The oval shaped radiation pattern (35° x 70°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor application where a wide viewing angle and readability in sunlight are essential. These lamps have very smooth, matched radiation patterns ensuring consistent color mixing in full color applications, message uniformity across the viewing angle of the sign.

High efficiency LED material is used in these lamps: Aluminum Indium Gallium Phosphide (AlInGaP) for amber and red, and Indium Gallium Nitride (InGaN) for blue and green. Each lamp is made with an advance optical grade epoxy offering superior high temperature and high moisture resistance in outdoor applications. The package epoxy contains both UV-A and UV-B inhibitors to reduce the effects of long term exposure to direct sunlight.

Designers can select parallel or perpendicular orientation. Both lamps are available in tinted version.

### Features

- Well defined spatial radiation pattern
- Viewing angles:  
Major axis 70°  
Minor axis 35°
- High luminous output
- Red and Amber Intensity are available for:  
AlInGaP (Bright)  
AlInGaP II (Brightest)
- Colors:  
472 nm blue  
526 nm green  
626 nm red  
630 nm red  
590 nm amber  
592 nm amber
- Superior resistance to moisture
- UV resistant epoxy

### Benefits

- Viewing angle designed for wide field of view application
- Red, green, and blue radiation patterns matched for full color sign
- Superior performance in outdoor environments

### Applications

- Full color/video signs

**CAUTION:** The blue and green LEDs are Class 1 ESD sensitive. Please observe appropriate precautions during handling and processing. Refer to Agilent Application Note AN-1142 for additional details.



**Table 1. Device Selection Guide for AlInGaP II**

| <b>Part Number</b> | <b>Color and Dominant Wavelength <math>\lambda_d</math> (nm) Typ.</b> | <b>Luminous Intensity, <math>I_v</math> (mcd) at 20 mA Min.</b> | <b>Luminous Intensity, <math>I_v</math> (mcd) at 20 mA Max.</b> | <b>Forward Voltage, <math>V_f</math> (V) Max.</b> | <b>Leads with Stand-offs</b> | <b>Leadframe Orientation</b> | <b>Package Drawing</b> |
|--------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------|------------------------------|------------------------------|------------------------|
| HLMP-AD06-P00xx    | Red 630                                                               | 880                                                             |                                                                 | 2.4                                               | No                           | Parallel                     | A                      |
| HLMP-AD06-P0Txx    | Red 630                                                               | 880                                                             |                                                                 | 2.6                                               | No                           | Parallel                     | A                      |
| HLMP-AD16-P00xx    | Red 630                                                               | 880                                                             |                                                                 | 2.4                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-P0Txx    | Red 630                                                               | 880                                                             |                                                                 | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-RS0xx    | Red 630                                                               | 1500                                                            | 2500                                                            | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-RSTxx    | Red 630                                                               | 1500                                                            | 2500                                                            | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-RU0xx    | Red 630                                                               | 1500                                                            | 4200                                                            | 2.4                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-RUTxx    | Red 630                                                               | 1500                                                            | 4200                                                            | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-ST0xx    | Red 630                                                               | 1900                                                            | 3200                                                            | 2.4                                               | Yes                          | Parallel                     | B                      |
| HLMP-AD16-STTxx    | Red 630                                                               | 1900                                                            | 3200                                                            | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AL06-L00xx    | Amber 592                                                             | 400                                                             |                                                                 | 2.4                                               | No                           | Parallel                     | A                      |
| HLMP-AL06-L0Rxx    | Amber 592                                                             | 400                                                             |                                                                 | 2.6                                               | No                           | Parallel                     | A                      |
| HLMP-AL06-N00xx    | Amber 592                                                             | 680                                                             |                                                                 | 2.4                                               | No                           | Parallel                     | A                      |
| HLMP-AL06-N0Rxx    | Amber 592                                                             | 680                                                             |                                                                 | 2.6                                               | No                           | Parallel                     | A                      |
| HLMP-AL16-N00xx    | Amber 592                                                             | 680                                                             |                                                                 | 2.4                                               | Yes                          | Parallel                     | B                      |
| HLMP-AL16-N0Rxx    | Amber 592                                                             | 680                                                             |                                                                 | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AL16-PSRxx    | Amber 592                                                             | 880                                                             | 2500                                                            | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-AL16-QR0xx    | Amber 592                                                             | 1150                                                            | 1900                                                            | 2.4                                               | Yes                          | Parallel                     | B                      |
| HLMP-AL16-QRRxx    | Amber 592                                                             | 1150                                                            | 1900                                                            | 2.6                                               | Yes                          | Parallel                     | B                      |
| HLMP-BD06-P00xx    | Red 630                                                               | 880                                                             |                                                                 | 2.4                                               | No                           | Perpendicular                | C                      |
| HLMP-BD06-P0Txx    | Red 630                                                               | 880                                                             |                                                                 | 2.6                                               | No                           | Perpendicular                | C                      |
| HLMP-BD06-RS0xx    | Red 630                                                               | 1500                                                            | 2500                                                            | 2.4                                               | No                           | Perpendicular                | C                      |
| HLMP-BD06-RSTxx    | Red 630                                                               | 1500                                                            | 2500                                                            | 2.6                                               | No                           | Perpendicular                | C                      |
| HLMP-BD16-P00xx    | Red 630                                                               | 880                                                             |                                                                 | 2.4                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BD16-P0Txx    | Red 630                                                               | 880                                                             |                                                                 | 2.6                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BD16-RU0xx    | Red 630                                                               | 1500                                                            | 4200                                                            | 2.4                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BD16-RUTxx    | Red 630                                                               | 1500                                                            | 4200                                                            | 2.6                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BD16-ST0xx    | Red 630                                                               | 1900                                                            | 3200                                                            | 2.4                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BD16-STTxx    | Red 630                                                               | 1900                                                            | 3200                                                            | 2.6                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BL06-N00xx    | Amber 592                                                             | 680                                                             |                                                                 | 2.4                                               | No                           | Perpendicular                | C                      |
| HLMP-BL06-N0Rxx    | Amber 592                                                             | 680                                                             |                                                                 | 2.6                                               | No                           | Perpendicular                | C                      |
| HLMP-BL06-QRKxx    | Amber 592                                                             | 1150                                                            | 1900                                                            | 2.4                                               | No                           | Perpendicular                | C                      |
| HLMP-BL06-QRSxx    | Amber 592                                                             | 1150                                                            | 1900                                                            | 2.6                                               | No                           | Perpendicular                | C                      |
| HLMP-BL16-N00xx    | Amber 592                                                             | 680                                                             |                                                                 | 2.4                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BL16-N0Rxx    | Amber 592                                                             | 680                                                             |                                                                 | 2.6                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BL16-PS0xx    | Amber 592                                                             | 880                                                             | 2500                                                            | 2.4                                               | Yes                          | Perpendicular                | D                      |
| HLMP-BL16-PSRxx    | Amber 592                                                             | 880                                                             | 2500                                                            | 2.6                                               | Yes                          | Perpendicular                | D                      |

**Table 2. LED Indicators**  
**Device Selection Guide for AlInGaP**

| <b>Part Number</b> | <b>Color and Dominant Wavelength <math>\lambda_d</math> (nm) Typ.</b> | <b>Luminous Intensity, <math>I_v</math> (mcd) at 20 mA Min.</b> | <b>Luminous Intensity, <math>I_v</math> (mcd) at 20 mA Max.</b> | <b>Leads with Stand-offs</b> | <b>Leadframe Orientation</b> | <b>Package Drawing</b> |
|--------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------|
| HLMP-AG01-K00xx    | Red 626                                                               | 310                                                             |                                                                 | No                           | Parallel                     | A                      |
| HLMP-AG11-KN0xx    | Red 626                                                               | 310                                                             | 880                                                             | Yes                          | Parallel                     | B                      |
| HLMP-AL01-K00xx    | Amber 590                                                             | 310                                                             |                                                                 | No                           | Parallel                     | A                      |
| HLMP-AL01-LP0xx    | Amber 590                                                             | 400                                                             | 1150                                                            | No                           | Parallel                     | A                      |
| HLMP-AL01-NR0xx    | Amber 590                                                             | 680                                                             | 1900                                                            | No                           | Parallel                     | A                      |
| HLMP-AL11-KN0xx    | Amber 590                                                             | 310                                                             | 880                                                             | Yes                          | Parallel                     | B                      |
| HLMP-AL11-NR0xx    | Amber 590                                                             | 680                                                             | 1900                                                            | Yes                          | Parallel                     | B                      |
| HLMP-BG01-LM0xx    | Red 626                                                               | 400                                                             | 520                                                             | No                           | Perpendicular                | C                      |
| HLMP-BG01-MN0xx    | Red 626                                                               | 520                                                             | 880                                                             | No                           | Perpendicular                | C                      |
| HLMP-BG11-KN0xx    | Red 626                                                               | 310                                                             | 880                                                             | Yes                          | Perpendicular                | D                      |
| HLMP-BL01-NR0xx    | Amber 590                                                             | 680                                                             | 1900                                                            | No                           | Perpendicular                | C                      |
| HLMP-BL11-KN0xx    | Amber 590                                                             | 310                                                             | 880                                                             | Yes                          | Perpendicular                | D                      |
| HLMP-BL11-NR0xx    | Amber 590                                                             | 680                                                             | 1900                                                            | Yes                          | Perpendicular                | D                      |

**Table 3. Device Selection Guide for InGaN**

| <b>Part Number</b> | <b>Color and Dominant Wavelength <math>\lambda_d</math> (nm) Typ.</b> | <b>Luminous Intensity, <math>I_v</math> (mcd) at 20 mA Min.</b> | <b>Leads with Stand-offs</b> | <b>Leadframe Orientation</b> | <b>Package Drawing</b> |
|--------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------|
| HLMP-AB01-J00xx    | Blue 472                                                              | 240                                                             | No                           | Parallel                     | A                      |
| HLMP-BB11-J00xx    | Blue 472                                                              | 240                                                             | Yes                          | Perpendicular                | D                      |
| HLMP-BB11-K00xx    | Blue 472                                                              | 310                                                             | Yes                          | Perpendicular                | D                      |
| HLMP-BM11-L00xx    | Green 526                                                             | 400                                                             | Yes                          | Perpendicular                | D                      |
| HLMP-BM11-Q00xx    | Green 526                                                             | 1150                                                            | Yes                          | Perpendicular                | D                      |
| HLMP-AB11-J00xx    | Blue 472                                                              | 240                                                             | Yes                          | Parallel                     | B                      |
| HLMP-AM01-Q00xx    | Green 526                                                             | 1150                                                            | No                           | Parallel                     | A                      |
| HLMP-BB01-J0Bxx    | Blue 472                                                              | 240                                                             | No                           | Perpendicular                | C                      |
| HLMP-BB11-KN0xx    | Blue 472                                                              | 310                                                             | Yes                          | Perpendicular                | D                      |
| HLMP-BM01-L00xx    | Green 526                                                             | 400                                                             | No                           | Perpendicular                | C                      |

Tolerance for intensity range limit is  $\pm 15\%$ .

## Part Numbering System

HLMP-X X X X - X X X XX

### Mechanical Options

00: Bulk Packaging

DD: Ammo Pack

YY: Flexi-Bin; Bulk Packaging

ZZ: Flexi-Bin; Ammo Pack

### Color Bin

0: No Color Bin Limitation

R: Color Bins 1, 2, 4, and 6 with  $V_F$  max of 2.6 V

T: Red Color with  $V_F$  max of 2.6 V

B: Color bin 2 and 3 only

K: Color bins 2 and 4 only

S: Color bins 2 and 4 with  $V_F$  max of 2.6 V

### Maximum Intensity Bin

0: No  $I_v$  Bin Limitation

### Minimum Intensity Bin

### Tint Option

1 or 6: Matching Color Tints

### Standoff Option

0: Without

1: With

### Color

B: 472 nm Blue

D: 630 nm Red

G: 626 nm Red

L: 590 or 592 nm Amber


M: 526 nm Green

### Package

A: 5 mm 35° x 70° Oval, Parallel

B: 5 mm 35° x 70° Oval, Perpendicular

## Package Dimensions

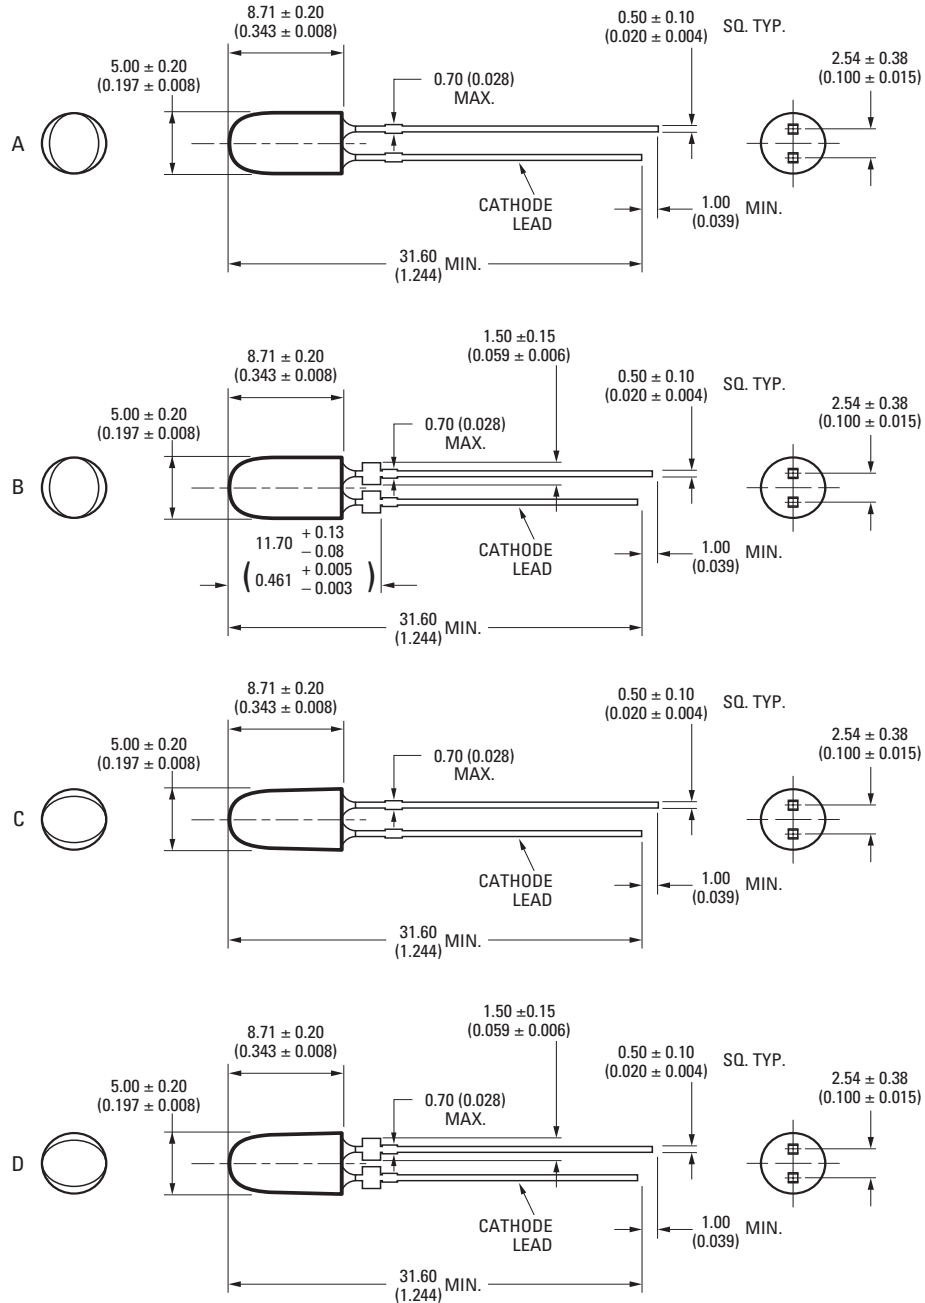

### NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
- LEADS ARE MILD STEEL, SOLDER DIPPED.
- TAPERS SHOWN AT TOP OF LEADS (BOTTOM OF LAMP PACKAGE) INDICATE AN EPOXY MENISCUS THAT MAY EXTEND ABOUT 1 mm (0.040 IN.) DOWN THE LEADS.
- RECOMMENDED PC BOARD HOLE DIAMETERS:
  - LAMP PACKAGES A AND C WITHOUT STAND-OFFS: FLUSH MOUNTING AT BASE OF LAMP PACKAGE = 1.143/1.067 mm (0.044/0.042 IN.).
  - LAMP PACKAGES B AND D WITH STAND-OFFS: MOUNTING AT LEAD STAND-OFFS.

**Absolute Maximum Ratings at T<sub>A</sub> = 25°C**

| Parameter                                  | Blue and Green      | Red and Amber       |
|--------------------------------------------|---------------------|---------------------|
| DC Forward Current <sup>[1]</sup>          | 30 mA               | 50 mA               |
| Peak Pulsed Forward Current <sup>[2]</sup> | 100 mA              | 100 mA              |
| Average Forward Current                    | 30 mA               | 30 mA               |
| Reverse Voltage (I <sub>R</sub> = 100 µA)  |                     | 5 V                 |
| Reverse Voltage (I <sub>R</sub> = 10 µA)   | 5 V                 |                     |
| Power Dissipation                          | 120 mW              | 120 mW              |
| LED Junction Temperature                   | 130°C               | 130°C               |
| Operating Temperature Range                | −40°C to +80°C      | −40°C to +100°C     |
| Storage Temperature Range                  | −40°C to +100°C     | −40°C to +120°C     |
| Wave Soldering Temperature <sup>[3]</sup>  | 250°C for 3 seconds | 250°C for 3 seconds |

**Notes:**

1. Derate linearly from Figure 7.
2. Duty Factor 30% KHz.
3. 1.59 mm (0.060 in.) below body.

**Electrical/Optical Characteristics at  $T_A = 25^\circ\text{C}$** 

| Parameter                             | Symbol                  | Min. | Typ. | Max. | Units              | Test Conditions                                                                   |
|---------------------------------------|-------------------------|------|------|------|--------------------|-----------------------------------------------------------------------------------|
| Typical Viewing Angle                 |                         |      |      |      |                    |                                                                                   |
| Major                                 | $2\theta_{1/2}$         |      | 70   |      | deg                |                                                                                   |
| Minor                                 |                         |      | 35   |      |                    |                                                                                   |
| Forward Voltage                       | $V_F$                   |      |      |      | V                  | $I_F = 20\text{ mA}$                                                              |
| Red ( $\lambda_d = 626\text{ nm}$ )   |                         |      | 2.0  | 2.4  |                    |                                                                                   |
| Red ( $\lambda_d = 630\text{ nm}$ )   |                         |      |      |      |                    |                                                                                   |
| Option xx0xx                          |                         |      | 2.2  | 2.4  |                    |                                                                                   |
| Option xxTxx                          |                         |      | 2.3  | 2.6  |                    |                                                                                   |
| Amber ( $\lambda_d = 590\text{ nm}$ ) |                         |      | 2.0  | 2.4  |                    |                                                                                   |
| Amber ( $\lambda_d = 592\text{ nm}$ ) |                         |      |      |      |                    |                                                                                   |
| Option xx0xx                          |                         |      | 2.2  | 2.4  |                    |                                                                                   |
| Option xxRxx, xxSxx                   |                         |      | 2.3  | 2.6  |                    |                                                                                   |
| Blue ( $\lambda_d = 472\text{ nm}$ )  |                         |      | 3.5  | 4.0  |                    |                                                                                   |
| Green ( $\lambda_d = 526\text{ nm}$ ) |                         |      | 3.5  | 4.0  |                    |                                                                                   |
| Reverse Voltage                       |                         |      |      |      |                    |                                                                                   |
| Amber, Red                            | $V_R$                   | 5    | 20   |      | V                  | $I_R = 100\text{ }\mu\text{A}$                                                    |
| Blue, Green                           |                         | 5    | —    |      |                    | $I_R = 10\text{ }\mu\text{A}$                                                     |
| Peak Wavelength                       |                         |      |      |      |                    |                                                                                   |
| Amber ( $\lambda_d = 592\text{ nm}$ ) | $\lambda_{\text{peak}}$ |      | 594  |      | nm                 | Peak of Wavelength of Spectral Distribution at $I_F = 20\text{ mA}$               |
| Red ( $\lambda_d = 630\text{ nm}$ )   |                         |      | 639  |      |                    |                                                                                   |
| Blue ( $\lambda_d = 472\text{ nm}$ )  |                         |      | 470  |      |                    |                                                                                   |
| Green ( $\lambda_d = 526\text{ nm}$ ) |                         |      | 524  |      |                    |                                                                                   |
| Spectral Halfwidth                    |                         |      |      |      |                    |                                                                                   |
| Amber ( $\lambda_d = 592\text{ nm}$ ) | $\Delta\lambda_{1/2}$   |      | 17   |      | nm                 | Wavelength Width at Spectral Distribution 1/2 Power Point at $I_F = 20\text{ mA}$ |
| Red ( $\lambda_d = 630\text{ nm}$ )   |                         |      | 17   |      |                    |                                                                                   |
| Blue ( $\lambda_d = 472\text{ nm}$ )  |                         |      | 35   |      |                    |                                                                                   |
| Green ( $\lambda_d = 526\text{ nm}$ ) |                         |      | 47   |      |                    |                                                                                   |
| Capacitance                           |                         |      |      |      |                    | $V_F = 0, F = 1\text{ MHz}$                                                       |
| Amber, Red                            | C                       |      | 40   |      | pF                 |                                                                                   |
| Blue, Green                           |                         |      | 43   |      |                    |                                                                                   |
| Luminous Efficacy                     |                         |      |      |      |                    |                                                                                   |
| Amber ( $\lambda_d = 592\text{ nm}$ ) | $\eta_v$                |      | 500  |      | lm/W               | Emitted Luminous Power/Emitted Radiant Power at $I_F = 20\text{ mA}$              |
| Red ( $\lambda_d = 630\text{ nm}$ )   |                         |      | 155  |      |                    |                                                                                   |
| Blue ( $\lambda_d = 472\text{ nm}$ )  |                         |      | 75   |      |                    |                                                                                   |
| Green ( $\lambda_d = 526\text{ nm}$ ) |                         |      | 520  |      |                    |                                                                                   |
| Thermal Resistance                    | $R\Theta_{J-PIN}$       |      | 240  |      | $^\circ\text{C/W}$ | LED Junction-to-Cathode Lead                                                      |

**Notes:**

1.  $2\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the on-axis intensity.
2. The radiant intensity,  $I_e$  in watts per steradian, may be found from the equation  $I_e = I_v/\eta_v$  where  $I_v$  is the luminous intensity in candelas and  $\eta_v$  is the luminous efficacy in lumens/watt.
3. The luminous intensity is measured on the mechanical axis of the lamp package.
4. The optical axis is closely aligned with the package mechanical axis.
5. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
6. For Options -xxRxx, -xxSxx and -xxTxx, max. forward voltage ( $V_F$ ) is 2.6 V. Refer to  $V_F$  bin table.

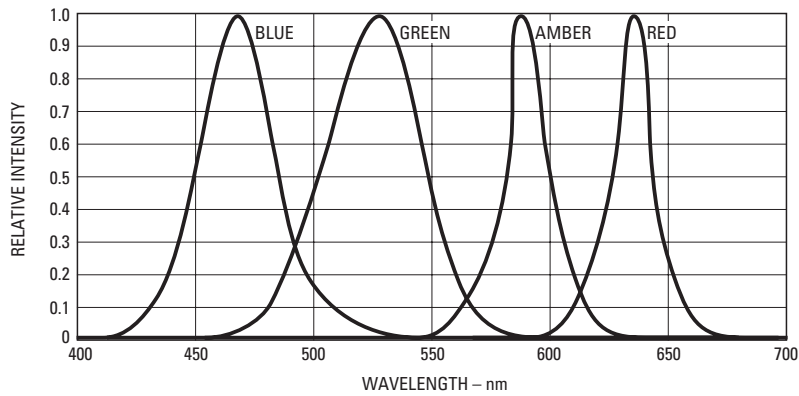


Figure 1. Relative intensity vs. wavelength.

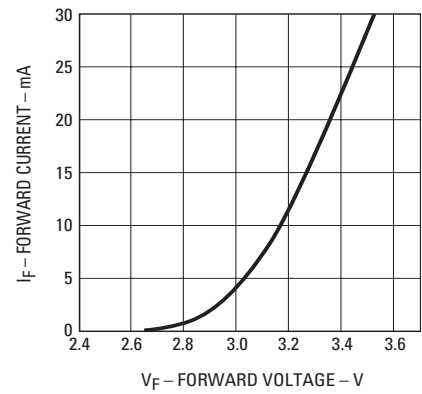


Figure 2. Blue, green forward current vs. forward voltage.

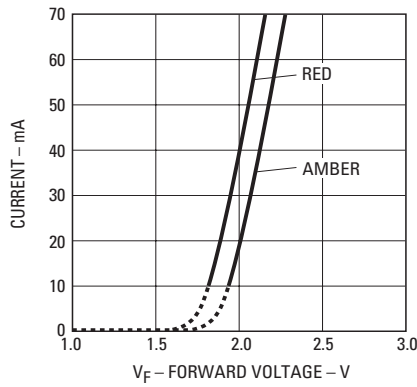


Figure 3a. Amber, red forward current vs. forward voltage.

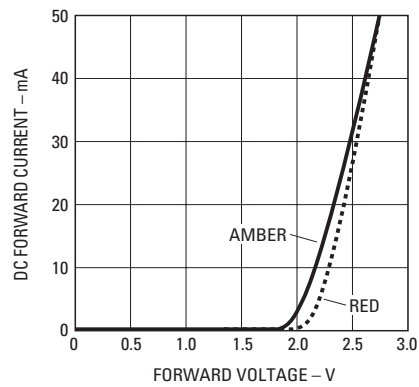


Figure 3b. Forward current vs. forward voltage for option -xxTxx red, and option -xxRxx and -xxSxx amber.

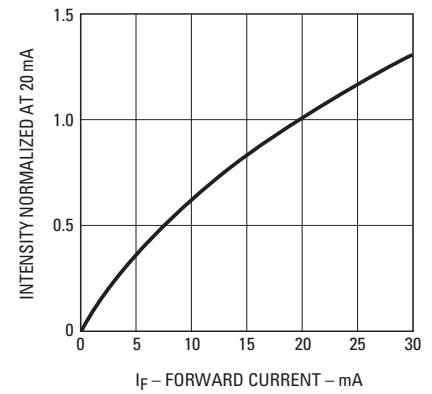


Figure 4. Blue, green relative luminous intensity vs. forward current.

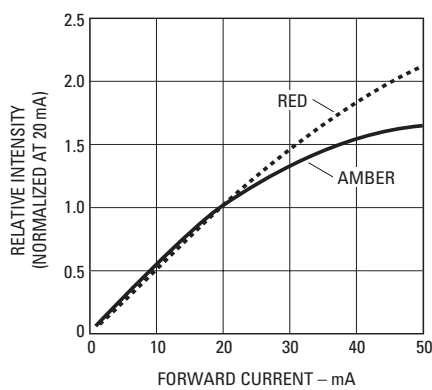


Figure 5. Amber, red relative luminous intensity vs. forward current.

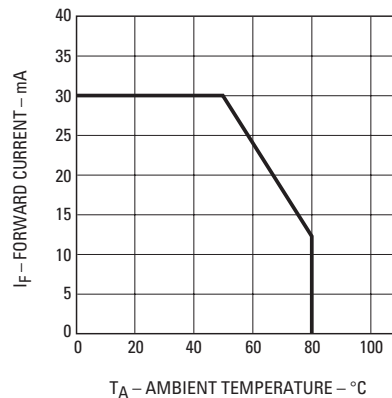


Figure 6. Blue, green maximum forward current vs. ambient temperature.

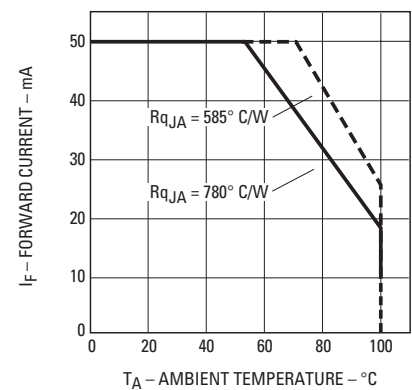


Figure 7. Amber, red maximum forward current vs. ambient temperature.



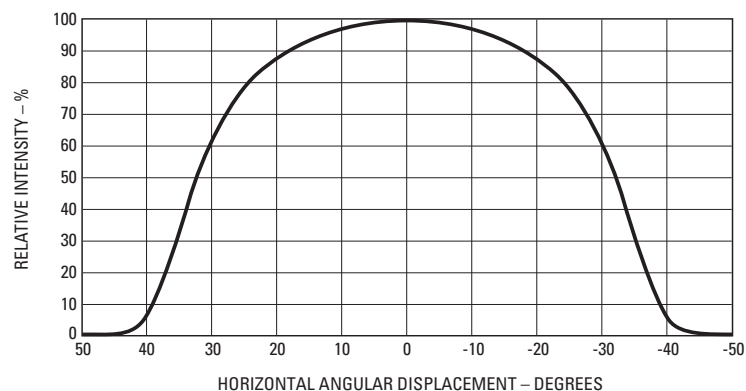
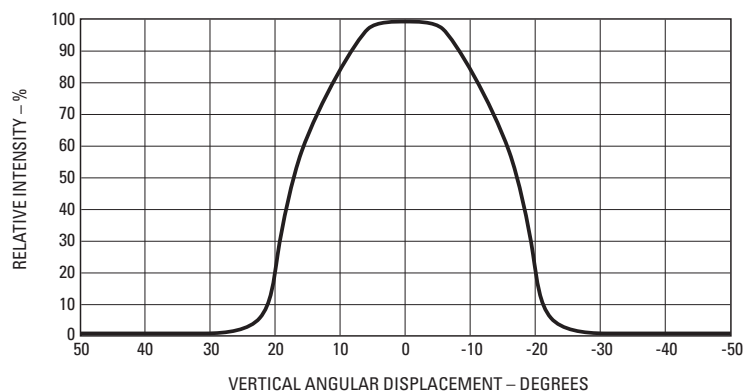


Figure 8. Spatial radiation pattern – 35 x 70 degree lamps.

#### Intensity Bin Limits (mcd at 20 mA)

| Bin Name | Min. | Max. |
|----------|------|------|
| G        | 140  | 180  |
| H        | 180  | 240  |
| J        | 240  | 310  |
| K        | 310  | 400  |
| L        | 400  | 520  |
| M        | 520  | 680  |
| N        | 680  | 880  |
| P        | 880  | 1150 |
| Q        | 1150 | 1500 |
| R        | 1500 | 1900 |
| S        | 1900 | 2500 |
| T        | 2500 | 3200 |
| U        | 1900 | 2500 |

Tolerance for each bin limit is  $\pm 15\%$ .

#### Amber Color Bin Limits (nm at 20 mA)

| Bin Name | Min.  | Max.  |
|----------|-------|-------|
| 1        | 584.5 | 587.0 |
| 2        | 587.0 | 589.5 |
| 4        | 589.5 | 592.0 |
| 6        | 592.0 | 594.5 |

Tolerance for each bin limit is  $\pm 0.5$  nm.

#### Blue Color Bin Limits (nm at 20 mA)

| Bin Name | Min.  | Max.  |
|----------|-------|-------|
| 1        | 460.0 | 464.0 |
| 2        | 464.0 | 468.0 |
| 3        | 468.0 | 472.0 |
| 4        | 472.0 | 476.0 |
| 5        | 476.0 | 480.0 |

Tolerance for each bin limit is  $\pm 0.5$  nm.

#### Green Color Bin Limits (nm at 20 mA)

| Bin Name | Min.  | Max.  |
|----------|-------|-------|
| 1        | 520.0 | 524.0 |
| 2        | 524.0 | 528.0 |
| 3        | 528.0 | 532.0 |
| 4        | 532.0 | 536.0 |
| 5        | 536.0 | 540.0 |

Tolerance for each bin limit is  $\pm 0.5$  nm.

#### Vf Bin Table<sup>[2]</sup>

| Bin Id | Min. | Max. |
|--------|------|------|
| VA     | 2.0  | 2.2  |
| VB     | 2.2  | 2.4  |
| VC     | 2.4  | 2.6  |

#### Notes:

1. All bin categories are established for classification of products. Products may not be available in all bin categories. Please contact your Agilent representative for further information.
2. Vf bin table only available for those numbers with options -xxRxx, -xxSxx, -xxTxx.

**[www.agilent.com/semiconductors](http://www.agilent.com/semiconductors)**

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or  
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or 0120-61-1280(Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand,  
Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

August 27, 2004

5988-9224EN



**Agilent Technologies**