

PT3320 Series

30-W 48-V Input
Isolated DC/DC Converter

SLTS018B

(Revised 4/9/2002)



Features

- Input Voltage Range: 36V to 75V
- 1500 VDC Isolation
- On/Off Control
- V_o Adjust
- Differential Remote Sense
- Current Limit
- Short-Circuit Protection
- Over-Temperature Shutdown
- Undervoltage Lockout
- UL1950 Recognized
- Flexible SIP Package
- CSA 22.2 950 Certified
- EN60950 Approved
- VDE Licensed
- 4.9×10^6 Hrs MTBF
- Meets FCC Class A Radiated Limits

Description

The PT3320 series is a single-output isolated DC/DC converter, housed in a 19-pin aluminum SIP package. These modules are UL, CSA, and VDE approved for telecom applications, and rated at 30 watts or 8 A. Standard output voltages range from 1.8 V to 15 V, each adjustable by up to $\pm 10\%$ of nominal.

Operating features include a remote on/off control, an under-voltage-lockout (UVLO), and a differential remote sense. The PT3320 series also incorporates many protection features. These include output current limit, short-circuit protection, and over-temperature shutdown.

A 330 μ F of output capacitance is required for proper operation.

Ordering Information

| | | |
|---------------|-----------|-------------------|
| PT3321 | \square | = 3.3V/8A (26.4W) |
| PT3322 | \square | = 5.0V/6A |
| PT3323 | \square | = 12.0V/2.5A |
| PT3324 | \square | = 15.0V/2A |
| PT3325 | \square | = 2.0V/8A (16W) |
| PT3326 | \square | = 2.5V/8A (20W) |
| PT3327 | \square | = 1.8V/8A (14.4W) |
| PT3328 | \square | = 5.2V/6A |

PT Series Suffix (PT1234 x)

| Case/Pin Configuration | Order Suffix | Package Code * |
|------------------------|--------------|----------------|
| Vertical | N | (EHG) |
| Horizontal | A | (EHH) |
| SMD | C | (EHJ) |

* Previously known as package styles 840 & 850.


(Reference the applicable package code drawing for the dimensions and PC board layout)

Pin-Out Information

| Pin | Function |
|-----|-------------------------|
| 1 | Do Not Use |
| 2 | Remote On/Off \dagger |
| 3 | Do Not Use |
| 4 | $-V_{in}$ |
| 5 | $-V_{in}$ |
| 6 | $-V_{in}$ |
| 7 | $+V_{in}$ |
| 8 | $+V_{in}$ |
| 9 | $+V_{in}$ |
| 10 | $-V_o$ |
| 11 | $-V_o$ |
| 12 | $-V_o$ |
| 13 | -Remote Sense |
| 14 | $+V_o$ |
| 15 | $+V_o$ |
| 16 | $+V_o$ |
| 17 | $+V_o$ |
| 18 | V_o Adjust \dagger |
| 19 | +Remote Sense |

\dagger For more information, see application notes.

Standard Application

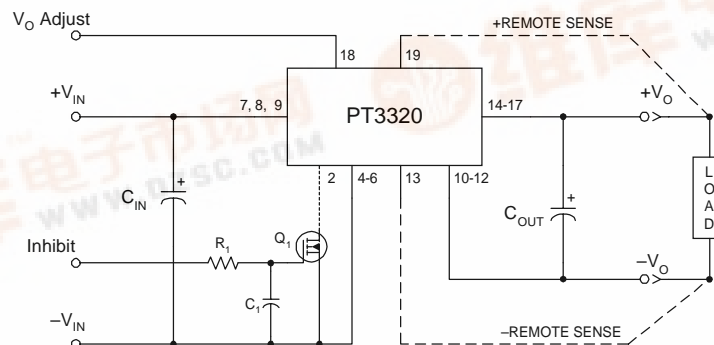

C_{in} = Optional 100 μ F/100V electrolytic
 C_{out} = Required 330 μ F electrolytic (See Notes)
 Q_1 = N-Channel MOSFET
 R_1/C_1 = Optional (see application notes)

PT3320 Series

30-W 48-V Input Isolated DC/DC Converter

Specifications (Unless otherwise stated, $T_a = 25^\circ\text{C}$, $V_{in} = 48\text{V}$, $C_{out} = 330\mu\text{F}$, and $I_o = I_{o,max}$)

| Characteristic | Symbol | Conditions | PT3320 SERIES | | | Units |
|--------------------------------|----------------------------------|---|--|-------------------------------|--|--------------------------------|
| | | | Min | Typ | Max | |
| Output Current | I_o | Over V_{in} range $V_o = 15\text{V}$ $V_o = 12\text{V}$ $V_o = 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | 0.1 ⁽¹⁾ 0.1 ⁽¹⁾ 0.25 ⁽¹⁾ 0.25 ⁽¹⁾ | — — — — | 2.0 2.5 6.0 8.0 | A |
| Input Voltage Range | V_{in} | Over I_o Range | 36.0 | 48.0 | 75.0 | V |
| Set Point Voltage Tolerance | $V_o \text{ tol}$ | $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | — — | ± 1 ± 33 | ± 1.5 ± 50 | % V_o mV |
| Temperature Variation | Reg_{temp} | $-40^\circ \leq T_a \leq +85^\circ\text{C}$ | — | ± 0.5 | — | % V_o |
| Line Regulation | Reg_{line} | Over V_{in} range $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | — — | ± 0.2 ± 7 | ± 1.0 ± 33 | % V_o mV |
| Load Regulation | Reg_{load} | Over I_o range $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | — — | ± 0.4 ± 13 | ± 1.0 ± 33 | % V_o mV |
| Total Output Voltage Variation | $\Delta V_{o,tot}$ | Includes set-point, line, load, $-40^\circ \leq T_a \leq +85^\circ\text{C}$ $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | — — | ± 2 ± 67 | — — | % V_o mV |
| Efficiency | η | $V_o = 15\text{V}$ $V_o = 12\text{V}$ $V_o = 5.0\text{V}$ $V_o = 3.3\text{V}$ $V_o = 1.8\text{V}$ | — — — — — | 85 87 84 80 69 | — — — — — | |
| V_o Ripple (pk-pk) | V_r | 20MHz bandwidth $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | — — | 1.0 50 | 2.0 75 | % V_o mV _{pp} |
| Transient Response | t_{tr} ΔV_{tr} | 0.1A/ μs load step, 50% to 100% $I_{o,max}$ V_o over/undershoot $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$ | — — — | 100 ± 3.0 ± 100 | 200 ± 5.0 ± 150 | μs % V_o mV |
| Short Circuit Current | I_{sc} | — | — | $2xI_{o,max}$ | — | A |
| Switching Frequency | f_s | Over V_{in} range $V_o > 10\text{V}$ $V_o < 10\text{V}$ | 400 600 | 500 750 | 600 900 | kHz |
| Under-Voltage Lockout | UVLO | V_{in} increasing V_{in} decreasing | — — | 34 33 | — — | V |
| Remote On/Off Input (pin 2) | V_{IH} V_{IL} I_{IL} | Referenced to $-V_{in}$ (pins 4–6) | 2.5 –0.2 –3 | — — –6 | 15 ⁽²⁾ +0.8 –10 | V μA |
| Standby Input Current | $I_{in, standby}$ | pins 2 & 4 connected | — | 8 | 16 | mA |
| Internal Input Capacitance | C_{in} | — | — | 0.66 | — | μF |
| External Output Capacitance | C_{out} | Between $+V_o$ and $-V_o$ $V_o \geq 9\text{V}$ $V_o \leq 5\text{V}$ | 260 260 | 330 330 | 600 ⁽³⁾ 1,000 ⁽³⁾ | μF |
| Isolation Voltage | — | Input-output/input-case | 1500 | — | — | Vdc |
| Capacitance | — | Input-output | — | 1200 | — | pF |
| Resistance | — | Input-output | 10 | — | — | M Ω |
| Operating Temperature Range | T_a | Over V_{in} range | –40 ⁽⁴⁾ | — | +85 ⁽⁵⁾ | $^\circ\text{C}$ |
| Maximum Case Temperature | T_c | — | — | — | 100 | $^\circ\text{C}$ |
| Storage Temperature Range | T_s | — | –40 | — | +125 | $^\circ\text{C}$ |
| Reliability | MTBF | Per Bellcore TR-332 50% stress, $T_a = 40^\circ\text{C}$, ground benign | 4.9 | — | — | 10^6 Hrs |
| Mechanical Shock | — | Per Mil-Std-883D, method 2002.3, 1mS, half-sine, mounted to a fixture | — | 500 | — | G's |
| Mechanical Vibration | — | Per Mil-Std-883D, method 2007.2, 20–2000Hz, soldered in board | — | 10 | — | G's |
| Weight | — | — | — | 43 | — | grams |
| Flammability | — | Materials meet UL 94V-0 | — | — | — | |

- Notes:**
- (1) The DC/DC converter will operate at no load with reduced specifications.
 - (2) The Remote On/Off input has an internal pull-up. If it is left open circuit the module will operate when input power is applied. A low-leakage (<100nA) MOSFET is recommended to control this input. The open-circuit voltage is less than 10V. See application notes for interface considerations.
 - (3) Output capacitor values are absolute. Allowances must be made for any additional de-coupling capacitors and the total external capacitor tolerance. The value of external capacitance is limited due to regulator startup current requirements. Consult the factory for further details.
 - (4) For operation below 0°C , the required external output capacitor must have temperature stable characteristics. E.g. Tantalum or Oscon® types.
 - (5) See Safe Operating Area curves or contact the factory for the appropriate thermal derating.


PT3320 Series

30-W 48-V Input
Isolated DC/DC Converter


Typical Characteristics

PT3321, 3.3 VDC (See Note A)


Efficiency vs Output Current

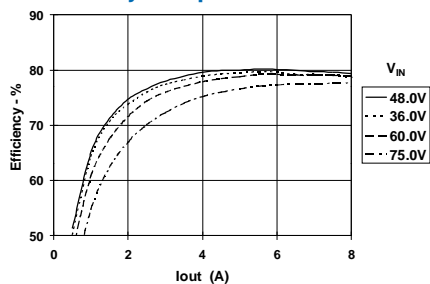


Ripple vs Output Current

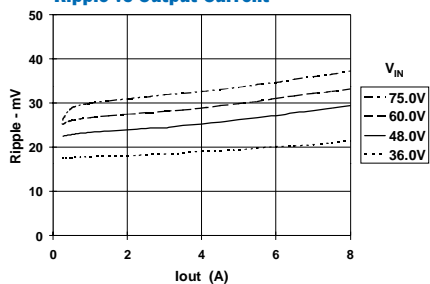

Power Dissipation vs Output Current

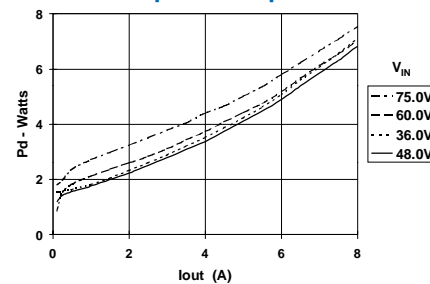


Safe Operating Area, VIN = 48V (See Note B)

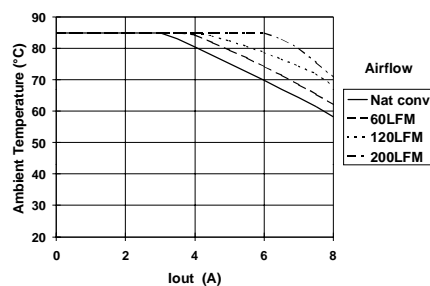


PT3322, 5.0 VDC (See Note A)


Efficiency vs Output Current

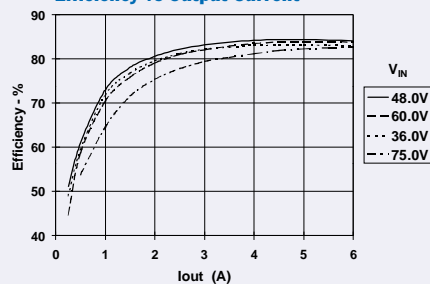


Ripple vs Output Current

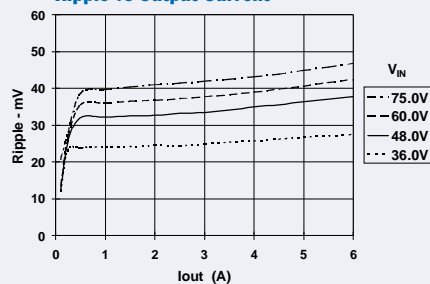

Power Dissipation vs Output Current

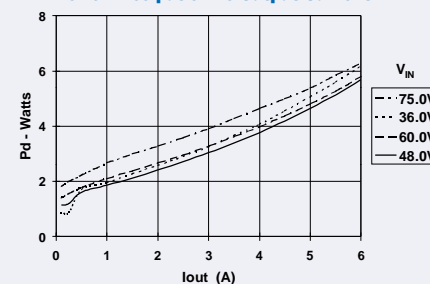


Safe Operating Area, VIN = 48V (See Note B)

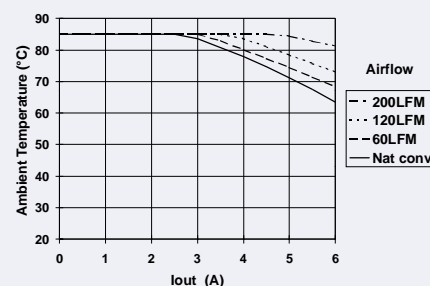


PT3323, 12.0 VDC (See Note A)


Efficiency vs Output Current

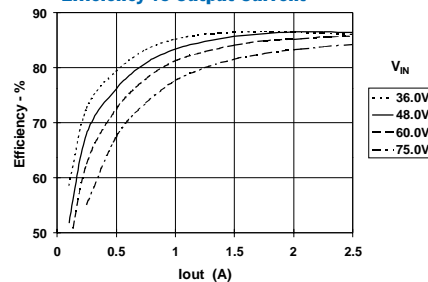


Ripple vs Output Current

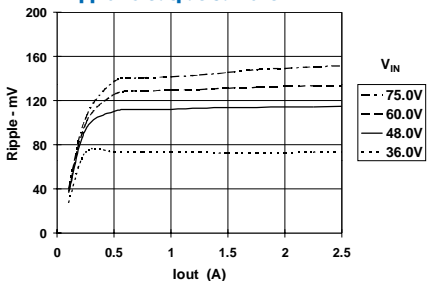

Power Dissipation vs Output Current

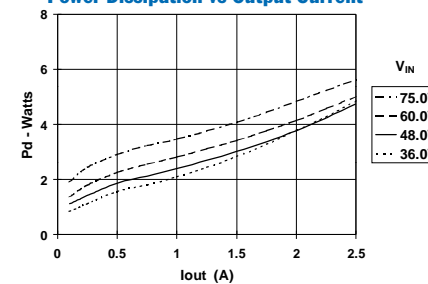

Safe Operating Area, VIN = 48V (See Note B)

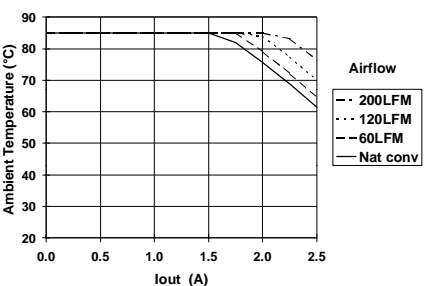

Note A: All data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the DC-DC Converter.

Note B: SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperature.

Application Notes

PT3320/3340/4560/4580 Series

Adjusting the Output Voltage of Power Trends' 30W Isolated DC/DC Converter Series

The factory pre-set output voltage of Power Trends' 30W series of isolated DC/DC converters may be adjusted within a nominal $\pm 10\%$ range. This is accomplished with the addition of a single external resistor. For the input voltage range specified in the data sheet, Table 1 gives the allowable adjustment range for each model as V_o (min) and V_o (max).

Adjust Up: An increase in the output voltage is obtained by adding a resistor, R_2 between V_o adjust (pin 18), and -Remote Sense (pin 13). See note 4.

Adjust Down: Add a resistor (R_1), between V_o adjust (pin 18), and +Remote Sense (pin 19).

Refer to Figure 1 and Tables 2 & 3 for both the placement and value of the required resistor, (R_1) or R_2 .

Notes:

1. Use only a single 1% resistor in either the (R_1) or R_2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors to V_o adjust. Any capacitance added to the V_o adjust control pin will affect the stability of the ISR.

3. If the remote sense pins are not being used, the resistors (R_1) and R_2 can be connected to $+V_{out}$ or $-V_{out}$ respectively.
4. The adjusted output voltage, V_a effectively sets the voltage across pins 13 and 19 (\pm Remote Sense). When using the remote sense pins, V_{out} (measured directly across pins 10–12, and 14–17) can be significantly higher than V_a , and may exceed V_o (max). If V_a is adjusted upward of V_o (max), the minimum input voltage is increased by the same percentage as V_{out} exceeds V_o (max).

The values of (R_1) [adjust down], and R_2 [adjust up], can also be calculated using the following formulas.

$$(R_1) = \frac{K_o (V_a - V_r)}{V_r (V_o - V_a)} - R_s \quad k\Omega$$

$$R_2 = \frac{K_o}{(V_a - V_o)} - R_s \quad k\Omega$$

Where V_o = Original output voltage
 V_a = Adjusted output voltage
 V_r = Reference voltage (Table 1)
 K_o = Multiplier constant (Table 1)
 R_s = Series resistance (Table 1)

Table 1

DC/DC CONVERTER ADJUSTMENT RANGE AND FORMULA PARAMETERS

Series Pt

AL Case:

| 24V Bus | | | | PT3341 | PT3342 | | PT3343 | PT3344 |
|---------|--------|--------|--------|--------|--------|--|--------|--------|
| 48V Bus | PT3327 | PT3325 | PT3326 | PT3321 | PT3322 | | PT3323 | PT3324 |

CU Case:

| 24V Bus | PT4585 | | | PT4581 | PT4582 | | PT4583 | PT4584 |
|-----------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| 48V Bus | PT4567 | PT4565 | PT4566 | PT4561 | PT4562 | PT4571 | PT4563 | PT4564 |
| V_o (nom) | 1.8V | 1.8V | 2.0V | 2.5V | 3.3V | 5.0V | 9.0V | 15.0V |
| V_o (min) | 1.62V | 1.62V | 1.8V | 2.25V | 2.95V | 4.5V | 7.0V | 13.5V |
| V_o (max) | 2.5V | 1.98V | 2.2V | 2.75V | 3.65V | 5.5V | 10.0V | 16.5V |
| V_r | 1.225V | 1.225V | 1.225V | 1.225V | 1.225V | 2.5V | 2.5V | 2.5V |
| K_o (V-k Ω) | 69.58 | 69.58 | 62.47 | 42.33 | 68.89 | 68.71 | 133.25 | 135.9 |
| R_s (k Ω) | 80.6 | 80.6 | 150.0 | 121.0 | 150.0 | 121.0 | 110 | 90.9 |

Figure 1

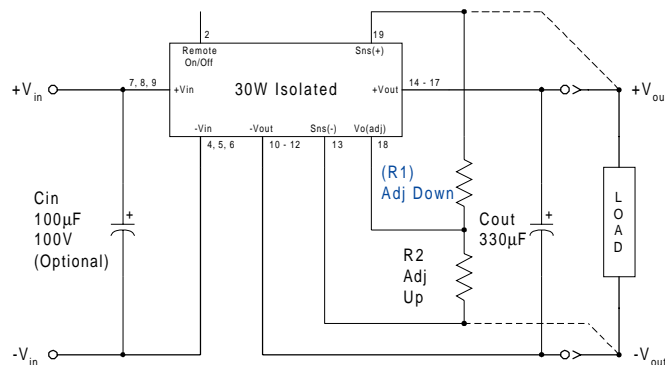


Table 2

DC/DC CONVERTER ADJUSTMENT RESISTOR VALUES

Series Pt #

AL Case

| 24V Bus | PT3341 | | | |
|---------|--------|--------|--------|--------|
| 48V Bus | PT3327 | PT3325 | PT3326 | PT3321 |

CU Case

| 24V Bus | PT4585 | PT4581 | | |
|---------|--------|--------|--------|--------|
| 48V Bus | PT4567 | PT4565 | PT4566 | PT4561 |

Current 8Adc 8Adc 8Adc 8Adc 8Adc

V_o(nom) 1.8V 1.8V 2.0V 2.5V 3.3V

| V _a (req'd) | | | | | |
|------------------------|-----------|-----------|------------|-----------|--|
| 1.65 | (80.3)kΩ | (80.3)kΩ | | | |
| 1.7 | (189.0)kΩ | (189.0)kΩ | | | |
| 1.75 | (516.0)kΩ | (516.0)kΩ | | | |
| 1.8 | | | | | |
| 1.85 | 1.31MΩ | 1.31MΩ | (62.5)kΩ | | |
| 1.9 | 615.0kΩ | 615.0kΩ | (194.0)kΩ | | |
| 1.95 | 383.0kΩ | 383.0kΩ | (589.0)kΩ | | |
| 2.0 | 267.0kΩ | | | | |
| 2.05 | 198.0kΩ | | 1.1MΩ | | |
| 2.1 | 151.0kΩ | | 475.0kΩ | | |
| 2.15 | 118.0kΩ | | 266.0kΩ | | |
| 2.2 | 93.3kΩ | | 162.0kΩ | | |
| 2.25 | 74.0kΩ | | (20.7)kΩ | | |
| 2.3 | 58.6kΩ | | (64.7.0)kΩ | | |
| 2.35 | 45.9kΩ | | (138.0)kΩ | | |
| 2.4 | 35.4kΩ | | (285.0)kΩ | | |
| 2.45 | 26.4kΩ | | (726.0)kΩ | | |
| 2.5 | 18.8kΩ | | | | |
| 2.55 | | | 726.0kΩ | | |
| 2.6 | | | 302.0kΩ | | |
| 2.65 | | | 161.0kΩ | | |
| 2.7 | | | 90.6kΩ | | |
| 2.75 | | | 48.3kΩ | | |
| 2.95 | | | | (127.0)kΩ | |
| 3.0 | | | | (183.0)kΩ | |
| 3.05 | | | | (261.0)kΩ | |
| 3.1 | | | | (377.0)kΩ | |
| 3.15 | | | | (572.0)kΩ | |
| 3.2 | | | | (961.0)kΩ | |
| 3.25 | | | | (2.13)MΩ | |
| 3.3 | | | | | |
| 3.35 | | | | 1.23MΩ | |
| 3.4 | | | | 539.0kΩ | |
| 3.45 | | | | 309.0kΩ | |
| 3.5 | | | | 194.0kΩ | |
| 3.55 | | | | 126.0kΩ | |
| 3.6 | | | | 79.6kΩ | |
| 3.65 | | | | 46.8kΩ | |

R1 = (Blue) R2 = Black

PT3320/3340/4560/4580 Series

Table 3

DC/DC CONVERTER ADJUSTMENT RESISTOR VALUES

Series Pt #

AL Case

| | | | | |
|------------------------|-----------|------------------------|-----------|------------|
| 24V Bus | PT3342 | | PT3343 | PT3344 |
| 48V Bus | PT3322 | | PT3323 | PT3324 |
| CU Case | | | | |
| 24V Bus | PT4582 | | PT4583 | PT4584 |
| 48V Bus | PT4562 | | PT4563 | PT4564 |
| Current | 6Adc | | 3.3Adc | 2.5Adc |
| V _o (nom) | 5.0V | | 9.0V | 12.0V |
| V _a (req'd) | | V _a (req'd) | | |
| 4.5 | (246.0)kΩ | 7.0 | (9.9)kΩ | |
| 4.55 | (293.0)kΩ | 7.2 | (29.2)kΩ | |
| 4.6 | (352.0)kΩ | 7.4 | (53.2)kΩ | |
| 4.65 | (428.0)kΩ | 7.6 | (84.2)kΩ | |
| 4.7 | (529.0)kΩ | 7.8 | (125.0)kΩ | |
| 4.75 | (670.0)kΩ | 8.0 | (183.0)kΩ | |
| 4.8 | (882.0)kΩ | 8.2 | (270.0)kΩ | |
| 4.85 | (1.23)MΩ | 8.4 | (414.0)kΩ | |
| 4.9 | (1.94)MΩ | 8.6 | (703.0)kΩ | |
| 4.95 | | 8.8 | (1.57)MΩ | |
| 5.0 | | 9.0 | | |
| 5.05 | | 9.2 | 556.0kΩ | |
| 5.1 | 566.0kΩ | 9.4 | 223.0kΩ | |
| 5.15 | 337.0kΩ | 9.6 | 112.0kΩ | |
| 5.2 | 223.0kΩ | 9.8 | 56.6kΩ | |
| 5.25 | 154.0kΩ | 10.0 | 23.3kΩ | |
| 5.3 | 108.0kΩ | • | | |
| 5.35 | 75.3kΩ | 10.8 | (285.0)kΩ | |
| 5.4 | 50.8kΩ | 11.0 | (371.0)kΩ | |
| 5.45 | 31.7kΩ | 11.2 | (500.0)kΩ | |
| 5.5 | 16.4kΩ | 11.4 | (715.0)kΩ | |
| | | 11.6 | (1.15)MΩ | |
| | | 11.8 | | |
| | | 12.0 | | |
| | | 12.2 | 588.0kΩ | |
| | | 12.4 | 249.0kΩ | |
| | | 12.6 | 136.0kΩ | |
| | | 12.8 | 78.9kΩ | |
| | | 13.0 | 45.0kΩ | |
| | | 13.2 | 22.3kΩ | |
| | | • | | |
| | | 13.5 | | (323.0)kΩ |
| | | 13.6 | | (355.0)kΩ |
| | | 13.8 | | (437.0)kΩ |
| | | 14.0 | | (522.0)kΩ |
| | | 14.2 | | (724.0)kΩ |
| | | 14.4 | | (1010.0)kΩ |
| | | 14.6 | | (1.58)MΩ |
| | | 14.8 | | |
| | | 15.0 | | |
| | | 15.2 | | 607.0kΩ |
| | | 15.4 | | 263.0kΩ |
| | | 15.6 | | 149.0kΩ |
| | | 15.8 | | 91.3kΩ |
| | | 16.0 | | 56.9kΩ |
| | | 16.5 | | 11.1kΩ |

R1 = (Blue) R2 = Black

Application Notes

PT3320/3340/4560/4580 Series

Using Remote On/Off on Power Trends' 30W Isolated DC-DC Converter Series

Power Trends' 30W isolated series of DC/DC converters incorporate a *Remote On/Off* function. This function may be used in applications for battery conservation, power-up/shutdown sequencing, or to co-ordinate the power-up of the regulator for active in-rush current control. (See TI application reports, SLTA021, and SLUA250).

The Remote On/Off function is provided by pin 2. If pin 2 is left open-circuit, the converter provides a regulated output whenever a valid source voltage ¹ is applied between +V_{in} (pins 7-9), and -V_{in} (pins 4-6). Applying a low voltage ², with respect to -V_{in} (pin 2), disables the regulator output ³. Table 1 details the control requirements for this input. Figure 1 shows how a discrete MOSFET (Q₁) may be referenced to the negative input voltage rail to control the Remote On/Off pin.

Table 1 Remote On/Off Control Requirements ²

| Parameter | min | max |
|----------------------------|-------------------|------------------------------------|
| Enable (V _{IH}) | 2.5V ⁵ | 15V (or open circuit) ⁴ |
| Disable (V _{IL}) | -0.3V | 0.8V |

Notes:

- These converters incorporate an "Under Voltage Lockout" (UVLO) function. This function automatically holds the converter output in the "Off" state until there is sufficient input voltage for the converter to produce a regulated output. Table 2 gives the applicable UVLO thresholds.


Table 2 UVLO Thresholds

| Series | UVLO Threshold | V _{in} Range |
|-------------|----------------|-----------------------|
| PT3320/4560 | 34 ± 2.0V | 36 – 75V |
| PT3340/4580 | 16.5 ± 1.5V | 18 – 60V |

- The Remote On/Off control pin uses -V_{in} (pins 4-6) as its ground reference. All voltages specified are with respect to -V_{in}.
- When the converter output is disabled the current drawn from the input supply is typically reduced to 8mA (16mA maximum).
- The internal circuitry comprises of a high impedance (3μA -10μA) current source. The open-circuit voltage is less than 10V.
- The Remote On/Off pin is ideally controlled using devices with an open-collector (or open-drain) output. A small low-leakage MOSFET (<100nA) is recommended. A pull-up resistor is not required, but may be necessary to ensure that the Remote On/Off pin exceeds V_{IH}(min) (see Table 1). Do not use a pull-up resistor to the +V_{in} input, or drive the pin above V_{IH}(max).


- Keep the on/off transition to less than 1ms. This prevents erratic operation of the ISR, whereby the output voltage may drift un-regulated between 0V and the rated output voltage during power-up.
- In Figure 1, Q₁ is a low-threshold MOSFET. The components R₁ and C₁ are added to improve noise susceptibility.

Figure 1

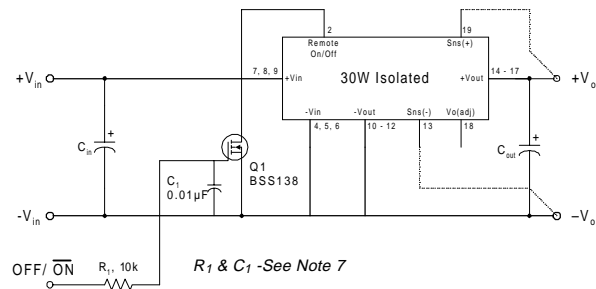

Turn-On Time: When the Remote On/Off input is left open-circuit, the output of the converter is automatically enabled when a valid input voltage ¹ is applied to the input power pins. The converter typically rises to full regulation within 30ms of the application of power (or after the release of the Remote On/Off pin with input power applied). The actual turn-on time will vary with the input voltage, output load, and the total amount of capacitance connected to the output. Using the circuit of Figure 1, Figure 2 shows the typical output voltage and input current waveforms for a PT3322/PT4562 after Q₁ is turned off. The turn off of Q₁ correlates with the fall of the Q₁ V_{gs} waveform. The waveforms were measured with a 48Vdc input voltage, and 5-A resistive load.

Figure 2

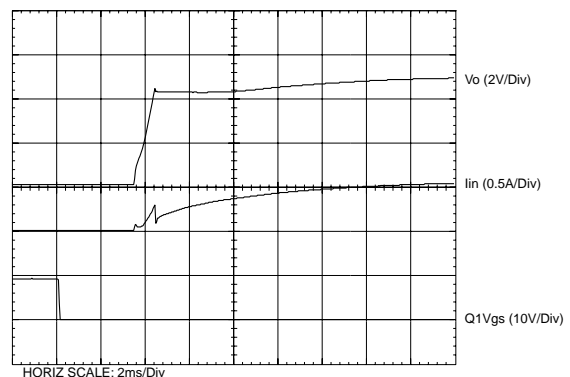

Application Notes

PT3320/3340 Series

VDE Approved Installation Instructions (Installationsanleitung)

| | |
|--|---|
| Nennspannung (Rated Voltage): | PT3320 36 to 72 Vdc, Transient to 75Vdc PT3340 18 to 60 Vdc |
| Nennaufnahme (Rated Input): | PT3320 1.5 Adc PT3340 3.0 Adc |
| Nennleistung (Rated Power): | 30 Watts Maximum |
| Ausgangsspannung (Sec. Voltage): | PT3320 Series PT3321, 3.3 Vdc, 8.0 Adc PT3322, 5.0 Vdc, 6.0 Adc PT3340 Series PT3341, 3.3 Vdc, 8.0 Adc PT3342, 5.0 Vdc, 6.0 Adc |
| Ausgangsstrom (Sec. Current): oder (or) | PT3323, 12.0 Vdc, 2.5 Adc PT3324, 15.0 Vdc, 2.0 Adc PT3343, 12.0 Vdc, 2.5 Adc PT3344, 15.0 Vdc, 2.0 Adc |
| Ausgangsleistung (Sec. Power): | PT3325, 2.0 Vdc, 8.0 Adc PT3326, 2.5 Vdc, 8.0 Adc PT3327, 1.8 Vdc, 8.0 Adc PT3328, 5.2 Vdc, 6.0 Adc PT3329, 6.0 Vdc, 5.0 Adc PT3330, 8.0 Vdc, 3.75 Adc PT3331, 9.0 Vdc, 3.3 Adc |

Angabe der Umgebungstemperatur

(Information on ambient temperature): +85°C Ambient or 100°C Case Maximum

Besondere Hinweise (Special Instructions):

Es ist vorzusehen, daß die Spannungsversorgung in einer Endanwendung über eine isolierte Sekundärschaltung bereit gestellt wird. Die Eingangsspannung der Spannungsversorgungsmodule muss eine verstärkte Isolierung von der Wechselstromquelle aufweisen.

Die Spannungsversorgung muss gemäß den Gehäuse-, Montage-, Kriech- und Luftstrecken-, Markierungs- und Trennanforderungen der Endanwendung installiert werden. Bei Einsatz eines TNV-3-Einganges muss die SELV-Schaltung ordnungsgemäß geerdet werden.

(The power supply is intended to be supplied by isolated secondary circuitry in an end use application. The input power to these power supplies shall have reinforced insulation from the AC mains.)

The power supply shall be installed in compliance with the enclosure, mounting, creepage, clearance, casualty, markings, and segregation requirements of the end-use application. When the input is TNV-3, the SELV circuitry must be reliably grounded.)


Offenbach,

VDE Prüf- und Zertifizierungsinstitut
Abteilung / Department TD

(Jürgen Bärwinkel)

Ort / Place:

Datum / Date:

 12/12/01
(Stempel und Unterschrift des Herstellers / Stamp
and signature of the manufacturer)

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265