Grayhill

SERIES 02

FEATURES

- Rapid, Easy Connections
- Hex Nut for Adjusting Tension
- Choices of Sizes and Styles



Ultra-Miniature














DIMENSIONS In Inches (and millimeters)



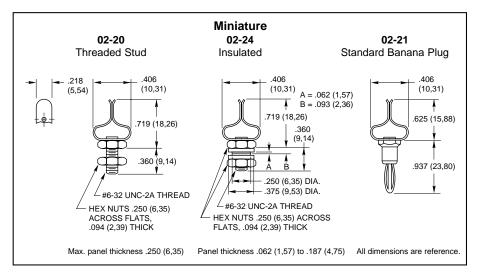



STANDARD OPTIONS

Standard Size Threaded Stud Clip can be made of Stainless Steel or Inconel X material. Not available through Distributors.

SPECIFICATIONS Materials and Finishes

Studs: Nickel-plated steel except for 02-41 and 02-42 which are nickel-plated brass Rivets and Nuts: Nickel-plated brass

Spring Clips: Nickel-plated brass except for 02-41 and 02-42 which are nickel-plated

beryllium copper

Insulators: Thermoset plastic

Standard Size 02-0 02-4 02-1 Threaded Stud Insulated Standard Banana Plug .550 (13.97) .550 (13.97) .550 (13.97) 7,92) A = .063(1,60).187 B = .094(2,39)(4.75)1.125 (28.58) 1.250 (31,75) 1.250 (31,75) .312 (7.92)312 (7 92) .937 (23,80) .375 (9,53) DIA .500 (12,7) DIA. -#8-32 UNC-2A THREAD #8-32 UNC-2A THREAD HEX NUTS .344 (8,74) HEX NUTS .344 (8,74) ACROSS FLATS, .125 (3,18) THICK ACROSS FLATS .125 (3,18) THICK Max. panel thickness .250 (6,35) All dimensions are reference.

ORDERING INFORMATION

Order using part numbers shown in dimensions.

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.