


LTR.	DESCRIPTION	DATE	APP'D.
3	RELEASED PER ECO #2212	JFW 10/11/90	KJR

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

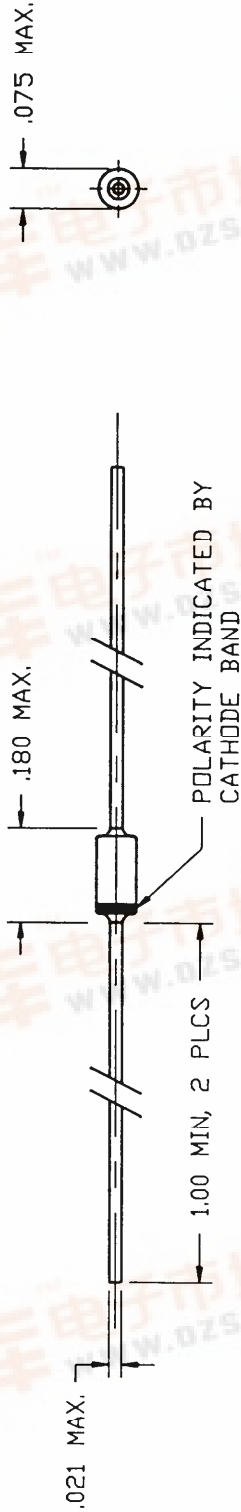

ELECTRICAL SPECIFICATIONS

PKG TYPE	V_{RRM} (V)	I_R (nA) @ V_R (V)	V_F (V) @ I_F (mA)	t_{rr} (ns)	TEST CONDITIONS
DD-35	100 MIN	25 20	1.0 MAX 10	4	$I_F=10\text{mA}$, $I_R=10\text{mA}$, $R_L=100\ \Omega$, $I_{rr}=1.0\text{mA}$

COPY

VICOR ANDOVER, MA. U.S.A.		SWITCHING DIODE, DD-35	
DRAWN: 4/80	CHECKED:	TOLERANCES (EXCEPT AS NOTED)	DRAWING NO.
APPROVED:		.XX $\pm$.01	02550
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)		.XXX $\pm$.005	REV.
DO NOT SCALE DRAWING		FRACT $\pm$ 1/64	3
NEXT ASSY:		ANGLES $\pm$ 10	
		SCALE 4:1	SHEET 1 OF 1