
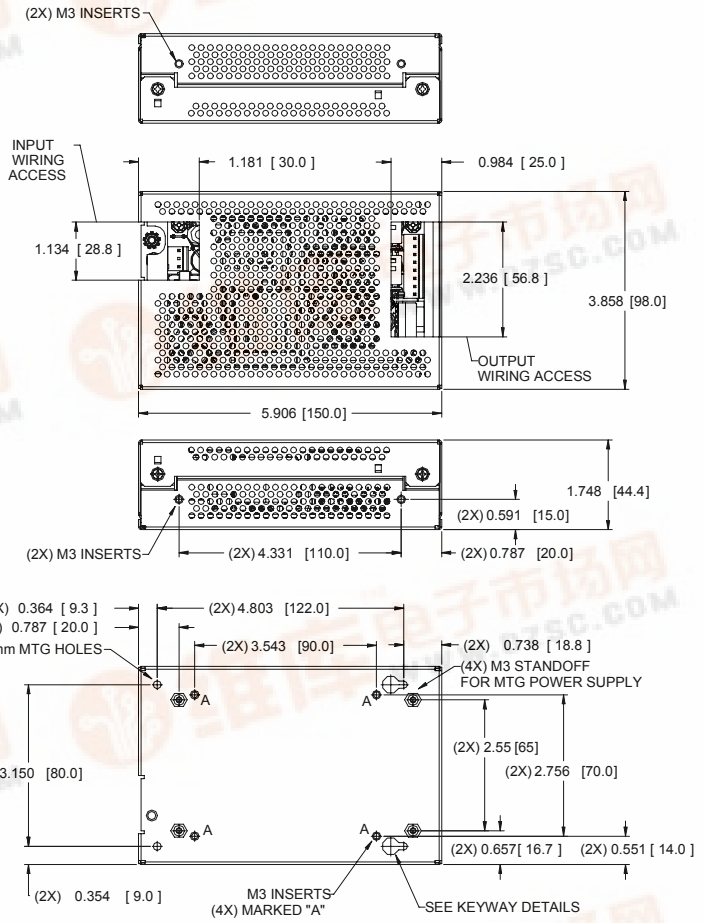


# LPX 80 ENCLOSURE

AMERICAS	EUROPE	ASIA
5810 Van Allen Way Carlsbad, CA 92008 Telephone: 760-930-4600 Facsimile: 760-930-0698	Astec House, Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX, UK Telephone: +44(0)1384-842211 Facsimile: +44(0)1384-843355	Units 2111-2116, Level 21 Tower1, Metroplaza 223, Hing Fong Road Kwai Fong, New Territories Hong Kong Telephone: 852-2437-9662 Facsimile: 852-2402-4426

## Installation Notes LPX80 • Cover Enclosure Kit LPX80 will fit all the LPX8X power supplies

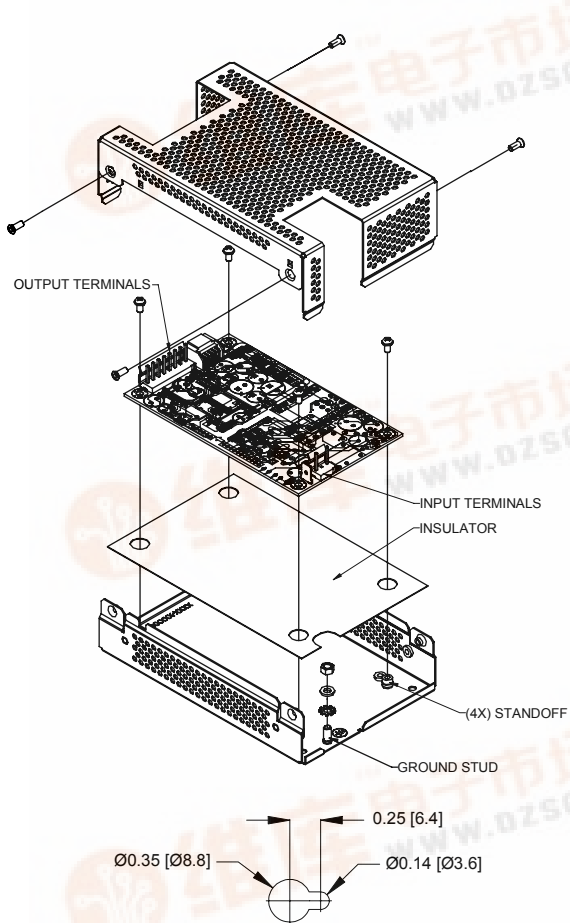

### MATERIALS

- 1 Base
- 1 Cover
- 4 M3 x 6mm pan head screws with spring washer
- 4 M3 x 6mm countersunk screws
- 1 M4 nut
- 1 M4 star washer
- 1 M4 spring washer
- 1 Plastic insulator sheet

### NOTES

1. All dimensions are in inches (mm)
2. Overall dimensions:  
5.9 (150) x 3.9 (98.0) x 1.75 (44.4)
3. Base plate has three sets of customer mountings:  
a. Bottom mounting (4x) M3 inserts. Max. screw penetration 0.0787 (2mm)  
b. Bottom mounting (2x) 4mm clear holes plus 2 keyways (see keyway detail)  
c. Side mountings (4x) M3 inserts. Max. screw penetration 0.236 (6mm)
4. Ensure insulator is correctly fitted in base under PCB to maintain safety creepage and clearances.
5. Ensure base is firmly connected to supply earth via the earth stud marked ⊕.
6. When using this enclosure, ensure that relevant safety standards (e.g., EN60950) are complied with, in respect to creepage and clearance distances, and distances through insulation.

