


查询08377供应商

捷多邦，专业PCB打样工厂，24小时加急出货

VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
1	DRAWN 5/7/93	HHC	

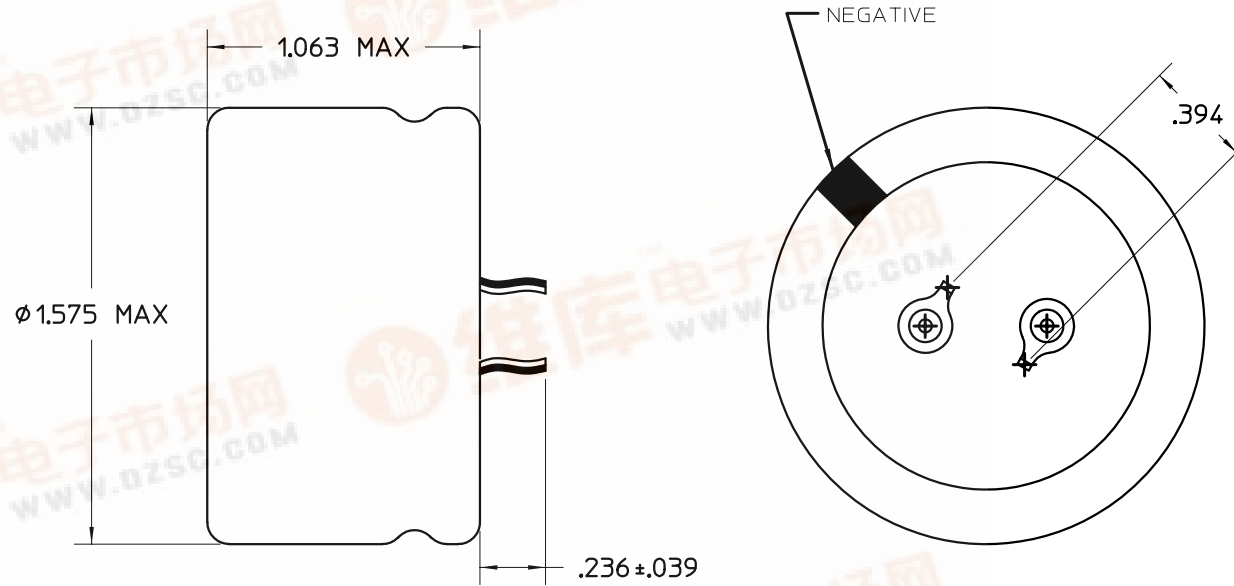

ELECTRICAL CHARACTERISTICS @ T=20°C (UNLESS OTHERWISE SPECIFIED)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
CAPACITANCE	C	216	270	324	μ F	@ 120 Hz, 20°C
CAPACITANCE	C				μ F	@ 120 Hz, -25°C - +85°C, 0 TO 400 VOLTS
LEAKAGE CURRENT	I _{DCL}			2000	μ A	@ 20°C, 5 MINUTES
EQUIVALENT SERIES RESISTANCE	ESR			1.23	Ω	@ 120 Hz, 20°C
WORKING VOLTAGE	V _{DCW}				V	
DISSIPATION FACTOR	D					
OPERATING TEMPERATURE	T	-25°C	-	+85°C	°C	
DIELECTRIC STRENGTH	V				V	


MARKING:

MFG. ID/PF CODE

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
 $\pm 1/64$.XX $\pm$.01 $\pm 1^\circ$
.XXX $\pm$.005

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN: H. CLINE	5/7/93
CHECKED:	
ISSUED	
APP'D	



CAPACITOR, 270 μ f $\pm$ 20%
400V

SIZE	FSCM NO.	DWG. NO.	REV.
B	67131	08377	1
SCALE	NONE	SHEET 1 OF 1	