

REVISIONS			
LTR	DESCRIPTION	DATE	APPRD
---	INITIAL RELEASE	4/8/99	BLB
A	ADDED BN & L TO PG1 & KBN & KRN TO PG2	6/23/99	BLB
B	ADDED KN & KNO TO PG2	7/16/99	BLB
C	ADDED PS REFERENCE NOTE FOR .5MM PITCH CABLE	8/20/01	BLB
D	CHANGED REV TO METHOD - OR A	8/25/01	BLB

4 SPACES (INCLUDES DASH)

3 SPACES (INCLUDES DASH)

4 SPACES

2 SPACES

1 SPACE
SEPARATING
ORIENT & METHOD

1 SPACE

PITCH --

COND. # --

LENGTH(MM)

ORIENT.

METHOD

XXX --

XX --

XXXX

XX


X

1-99

1-9999 (0000 = BULK)
NO DECIMAL
POINT (ONLY
ACCURATE
TO 1MM OR
.0394")

B-KL
SEE DETAIL

-(dash) or A
-(dash) = Standard,
A = Margin punch.
Margin punch on
.5mm pitch only (see pg 2)

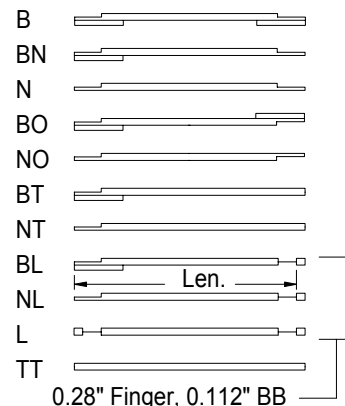

050 = 0.50MM(0.0197")F=.14",B=.236",WIRE=3x11 (ONLY PITCH W/MARGIN PUNCH OPTION)

062 = 0.625MM(0.0246")F=.14",B=.236",WIRE=3x16

100 = 1.00MM(0.0394")F=.14",B=.236",WIRE=3x26

125 = 1.25MM(0.0492")F=.17",B=.294",WIRE=3x31.5

127 = 1.27MM(0.050")F=.20",B=.294",WIRE=3x26

254 = 2.54MM(0.100")F=.24",B=.394",WIRE=3x62

=15 TOTAL SPACES

STANDARD INSULATION FOR THIS P/N=T1694(2x1.5)
STANDARD BACKER MAT'L FOR THIS P/N=5 MIL THICK

MATERIAL			
TOLERANCES	DR BRYCE BUDROW	DATE 4/8/99	
XXX ±	CHK		
XX ±	ENG BRYCE BUDROW	4/8/99	
ANGLES ±	APPD		
P ARLEX CORPORATION 7 INDUSTRIAL WAY SALEM, NH 03079 LAMINATED CABLE DIVISION Parlex standard pin for T1694(2x1.5), 3 mil thick wire & 5 mil thick backer mat'l.			
SIZE B	FSCM 18377	PS-704	Rev. D
SCALE 1:1	SHEET 1 OF 2		

KW=BULK ROLL W/BACKER & FINGER

KK=BULK ROLL

KR=BULK ROLL W/BACKER & FINGER OS

KL=BULK ROLL W/LAP SOLDER & FINGER W/BACKER

KS=BULK ROLL W/STRIPE DOWN OUTER EDGE

KW

KK

KR

KL

KS

(STRIPE)

KBN

BACKER EVER OTHER WINDOW (SAME SIDE)

KRN


BACKER EVER OTHER WINDOW (OPP. SIDE)

KN


BULK W/NO BACKERS

KNO

BULK W/NO BACKERS OPP SIDE

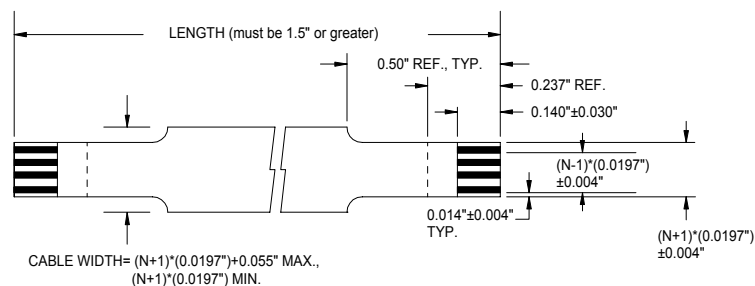

METHOD A (margin punch/available in .5mm pitch only)

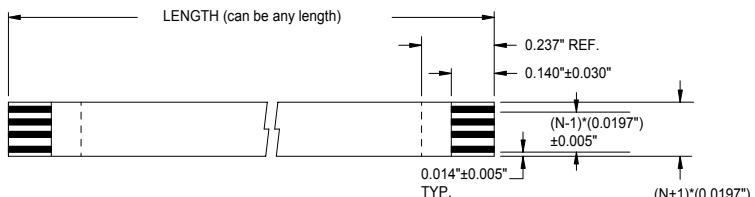

METHOD -(dash) (no punch/available in all pitches)

MATERIAL			
TOLERANCES	DR BRYCE BUDROW	DATE 4/8/99	
XXX ±	CHK		
XX ±	ENG BRYCE BUDROW	4/8/99	
ANGLES ±	APPD		
P ARLEX CORPORATION 7 INDUSTRIAL WAY SALEM, NH 03079 LAMINATED CABLE DIVISION Parlex standard pin for T1694(2x1.5), 3 mil thick wire & 5 mil thick backer mat'l.			
SIZE B	FSCM 18377	PS-704	Rev. D
SCALE 1:1	SHEET 2 OF 2		