

# KH206

## Overdrive-Protected Wideband Op Amp

## Features

- -3dB bandwidth of 180MHz
- 70MHz large signal bandwidth (20V<sub>pp</sub>)
- 0.1% settling in 19ns
- Overdrive protected
- Output may be current limited
- Stable without compensation
- 3M $\Omega$  input impedance
- Direct replacement for CLC206

## Applications

- Fast, precision A/D conversion
- Automatic test equipment
- Input/output amplifiers
- Photodiode, CCD preamps
- High-speed modems, radios
- Line drivers

## General Description

The KH206 is a wideband, overdrive-protected operational amplifier designed for applications needing both speed and high drive capability (100mA). Utilizing a well-established current feedback architecture, the KH206 exhibits performance far beyond that of conventional voltage feedback op amps. For example, the KH206 has a bandwidth of 180MHz at a gain of +20 and settles to 0.1% in 19ns. Plus, the KH206 has a combination of important features not found in other high-speed op amps.

The 100mA output current and the large signal bandwidth of 70MHz (20V<sub>pp</sub>) make the KH206 ideal for applications which involve both high signal amplitudes and heavy loads as in coaxial line driving applications.

Complete overdrive protection has been designed into the KH206. This is critical for applications, such as ATE and instrumentation, which require protection from signal levels high enough to cause saturation of the amplifier. This feature allows the output of the op amp to be protected against short circuits using techniques developed for low-speed op amps. With this capability, even the fastest signal sources can feature effective short circuit protection.


The KH206 is constructed using thin film resistor/bipolar transistor technology, and is available in the following versions:

KH206AI	-25°C to +85°C	12-pin TO-8 can
KH206AK	-55°C to +125°C	12-pin TO-8 can, features burn-in & hermetic testing
KH206AM	-55°C to +125°C	12-pin TO-8 can, environmentally screened and electrically tested to MIL-STD-883
KH206HXC	-55°C to +125°C	SMD#: 5962-8985801HXC
KH206HXA	-55°C to +125°C	SMD#: 5962-8985801HXA


## Typical Performance

parameter	gain setting						units
	+7	+20	+50	-1	-20	-50	
-3dB bandwidth	220	180	90	220	145	90	MHz
rise time	1.6	2	4	1.6	2.5	4	ns
slew rate	3.4	3.4	3.4	3.4	3.4	3.4	V/ns
settling time (to 0.1%)	22	19	17	20	19	18	ns

### Small Signal Pulse Response

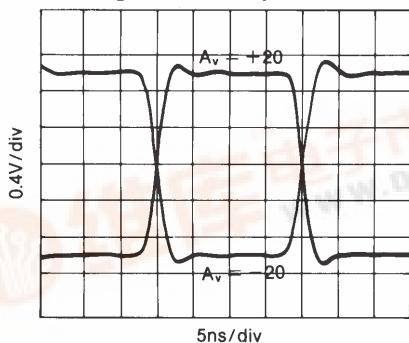

### Bottom View

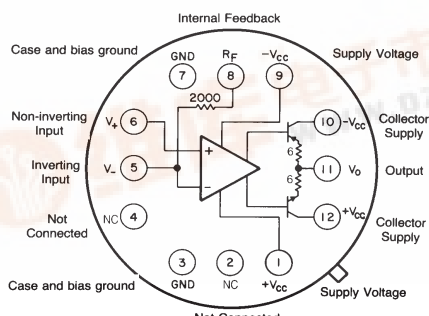

Pin 8 provides access to a 2000 $\Omega$  feedback resistor which can be connected to the output or left open if an external feedback resistor is desired.

## KH206 Electrical Characteristics ( $A_V = +20$ , $V_{CC} = \pm 15V$ , $R_L = 200\Omega$ , $R_f = 2k\Omega$ ; unless specified)

PARAMETERS	CONDITIONS	TYP	MAX & MIN RATINGS				UNITS	SYMBOL
Ambient Temperature	KH206AI	+25°C	−25°C	+25°C	+85°C			
Ambient Temperature	KH206AK/AM/HXC/HXA	+25°C	−55°C	+25°C	+125°C			
FREQUENCY DOMAIN RESPONSE								
† −3dB bandwidth	$V_{out} < 2V_{pp}$	180	>150	>150	>135	MHz		SSBW
large signal bandwidth	$V_{out} < 20V_{pp}$	70	>54	>60	>60	MHz		FPBW
gain flatness	$V_{out} < 2V_{pp}$							
† peaking	0.1 to 40MHz	0	<0.3	<0.3	<0.5	dB		GFPL
† peaking	>40MHz	0	<0.5	<0.5	<0.8	dB		GFPH
† rolloff	at 75MHz	—	<0.7	<0.7	<0.7	dB		GFR
group delay	to 75MHz	$3.0 \pm 2$	—	—	—	ns		GD
linear phase deviation	to 75MHz	0.6	<2.0	<1.5	<2.0	°		LPD
TIME DOMAIN RESPONSE								
rise and fall time	2V step	2.0	<2.5	<2.5	<2.7	ns		TRS
	20V step	7.0	<8.5	<8.5	<8.5	ns		TRL
settling time to 0.1%	10V step, note 2	22	<25	<25	<25	ns		TS
to 0.05%	10V step, note 2	24	<27	<27	<27	ns		TSP
overshoot	10V step	11	<15	<15	<15	%		OS
slew rate	$20V_{pp}$ , 100MHz	3.4	>2.7	>3.0	>3.0	V/ns		SR
DISTORTION AND NOISE RESPONSE								
† 2nd harmonic distortion	$2V_{pp}$ , 20MHz	−59	<−50	<−50	<−50	dBc		HD2
† 3rd harmonic distortion	$2V_{pp}$ , 20MHz	−67	<−55	<−55	<−55	dBc		HD3
equivalent input noise								
voltage	>100kHz	2.1	<3.0	<3.0	<3.5	$nV/\sqrt{Hz}$		VN
inverting current	>100kHz	22	<30	<30	<35	$pA/\sqrt{Hz}$		ICN
non-inverting current	>100kHz	5.0	<7.0	<7.0	<8.0	$pA/\sqrt{Hz}$		NCN
noise floor	>100kHz	−157	<−154	<−154	<−153	dBm(1Hz)		SNF
integrated noise	1kHz to 150MHz	39	<55	<55	<61	uV		INV
noise floor	>5MHz	−157	<−154	<−154	<−153	dBm(1Hz)		SNF
integrated noise	5MHz to 150MHz	39	<55	<55	<61	uV		INV
STATIC, DC PERFORMANCE								
*input offset voltage		3.5	<8.0	<8.0	<11.0	mV		VIO
average temperature coefficient		11	<25	<25	<25	$\mu V/^\circ C$		DVIO
*input bias current	non-inverting	4.0	<30	<20	<20	uA		IBN
average temperature coefficient		20	<125	<125	<125	$nA/^\circ C$		DIBN
*input bias current	inverting	2.0	<26	<10	<30	uA		IBI
average temperature coefficient		40	<200	<200	<200	$nA/^\circ C$		DIBI
*power supply rejection ratio		65	>55	>55	>55	dB		PSRR
common mode rejection ratio		60	>50	>50	>50	dB		CMRR
*supply current	no load	29	<31	<31	<33	mA		ICC
MISCELLANEOUS PERFORMANCE								
non-inverting input resistance	DC	3.0	>1.0	>1.0	>1.0	MΩ		RIN
non-inverting input capacitance	75MHz	5.2	<7.0	<7.0	<7.0	pF		CIN
output impedance	DC	—	<0.1	<0.1	<0.1	Ω		RO
output voltage range	no load	$\pm 12$	> $\pm 11$	> $\pm 11$	> $\pm 11$	V		VO
internal feedback resistor								
absolute tolerance		—	—	<0.2	—	%		RFA
temperature coefficient		—	—	−100±40	—	ppm/°C		RFTC
inverting input current self limit		3.3	<4.5	<4.5	<4.7	mA		ICL

Min/max ratings are based on product characterization and simulation. Individual parameters are tested as noted. Outgoing quality levels are determined from tested parameters.

### Absolute Maximum Ratings


$V_{CC}$	$\pm 20V$
$I_{out}$	$\pm 150mA$
common mode input voltage	$\pm ( V_{CC}  - 1)V$
differential input voltage	$\pm 3V$
thermal resistance: See thermal model.	
junction temperature	+175°C
operating temperature	AI: −25°C to +85°C
	AK/AM/HXC/HXA: −55°C to +125°C
storage temperature	−65°C to +150°C
lead temperature (soldering 10s)	+300°C

### Recommended Operating Conditions



$V_{CC}$	$\pm 5V$ to $\pm 15V$
$I_{out}$	$\pm 100mA$
common mode input voltage	$\pm ( V_{CC}  - 5)V$
gain range:	+7 to +50, −1 to −50
<b>note 1:</b>	* AI/AK/AM/HXC/HXA 100% tested at 25°C.
	† AK/AM/HXC/HXA 100% tested at +25°C & sample tested at −55°C & +125°C.
	† AI sample tested at +25°C.
<b>note 2:</b>	Settling time specifications require the use of an external feedback resistor (20)

# KH206 Typical Performance Characteristics ( $T_A = +25^\circ\text{C}$ , $A_v = +20$ , $V_{CC} = \pm 15\text{V}$ , $R_L = 200\Omega$ ; unless specified)



Non-Inverting Gain and Phase

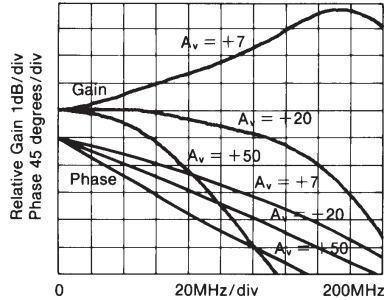


Inverting Gain and Phase

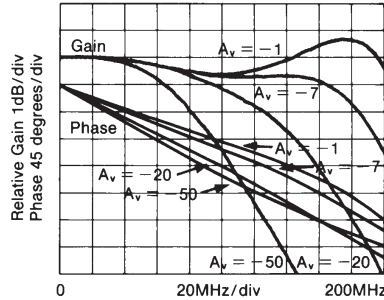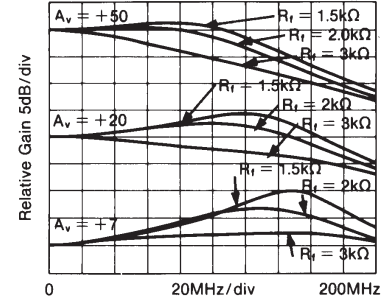Response vs. External  $R_f$ 


Large Signal Gain and Phase

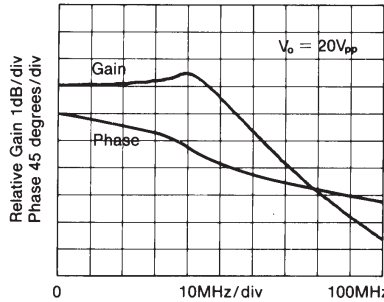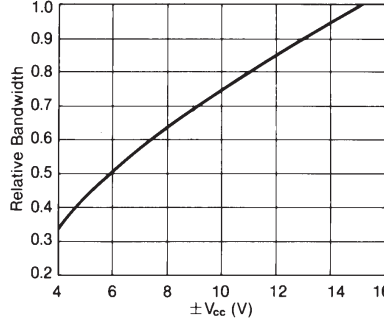Relative Bandwidth vs.  $V_{CC}$ 


Gain and Phase for Various Loads

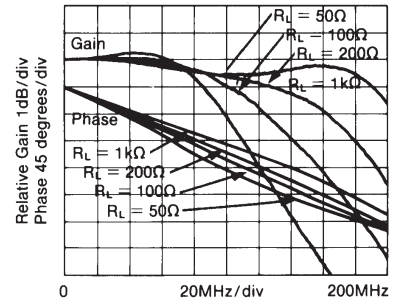


Small Signal Pulse Response

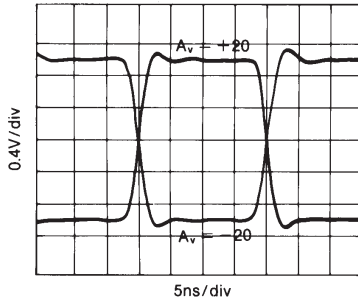


Large Signal Pulse Response

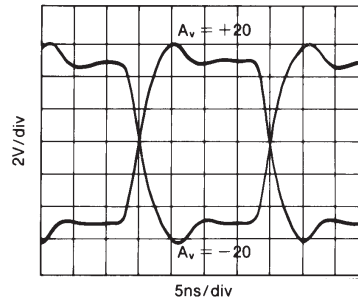


Settling Time

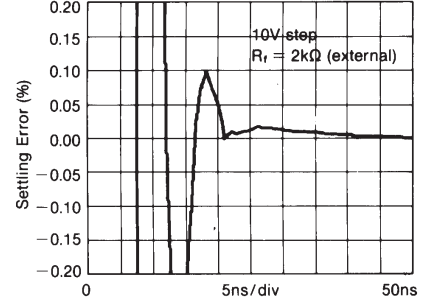


2nd and 3rd Harmonic Distortion

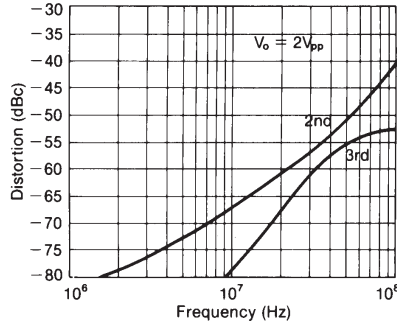


2-Tone 3rd Order Intermodulation Intercept

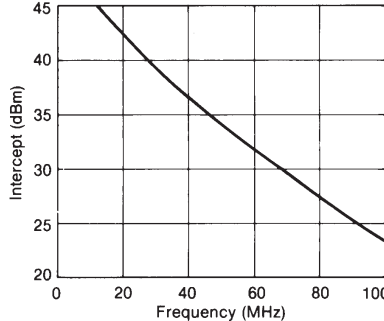


CMRR and PSRR

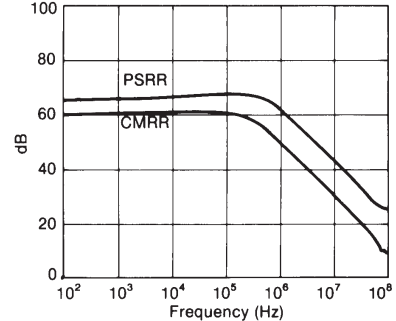

Equivalent Input Noise

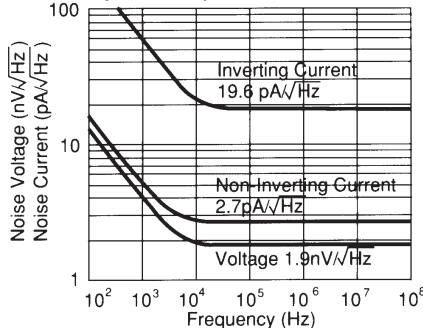

Thermal Model

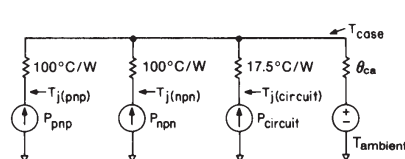

$P_{\text{circuit}} = [(+V_{CC}) - (-V_{CC})]^2 / 1.15k\Omega$   
 $P_{XXX} = [(\pm V_{CC}) - V_{out} - (I_{col})(R_{col} + 6)] (I_{col})$   
 (% duty cycle)  
 (For positive  $V_o$  and  $V_{CC}$ , this is the power in the npn output stage.)  
 (For negative  $V_o$  and  $V_{CC}$ , this is the power in the pnp output stage.)

$\theta_{ca} = 65^\circ\text{C/W}$  in still air without a heatsink  
 $35^\circ\text{C/W}$  in still air with a Thermalloy 2268  
 $15^\circ\text{C/W}$  in 300ft/min air with a Thermalloy 2268  
 (Thermalloy 2240 works equally well.)

$I_{col} = V_{out}/R_{load}$  or 4mA, whichever is greater. (Include feedback R in  $R_{load}$ .)  
 $R_{col}$  is a resistor ( $33\Omega$  recommended) between the xxx collector and  $\pm V_{CC}$ .  
 $T_{j(pnp)} = P_{pnp} (100 + \theta_{ca}) + (P_{circuit} + P_{npn}) \theta_{ca} + T_a$ , similar for  $T_{j(npn)}$ .  
 $T_{j(cir)} = P_{circuit} (17.5 + \theta_{ca}) + (P_{pnp} + P_{npn}) \theta_{ca} + T_a$ .

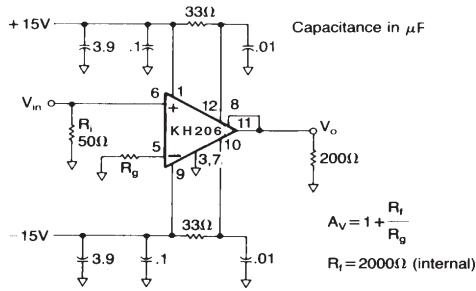


Figure 1: recommended non-inverting gain circuit

### Overdrive Protection

Unlike most other high-speed op amps, the KH206 is not damaged by saturation caused by overdriving input signals (where  $V_{in} \times \text{gain} > V_{out}$ ). The KH206 self limits the current at the inverting input when the output is saturated (see the inverting input current self limit specification); this ensures that the amplifier will not be damaged due to excessive internal currents during overdrive. For protection against input signals which would exceed either the maximum differential or common mode input voltage, the diode clamp circuits below may be used.

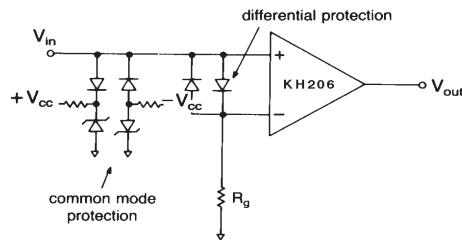


Figure 3: Diode clamp circuits for common mode and differential mode protection

### Short Circuit Protection:

Damage caused by short circuits at the output may be prevented by limiting the output current to safe levels. The most simple current limit circuit calls for placing resistors between the output stage collector supplies and the output stage collectors (pins 12 and 10). The value of this resistor is determined by:

$$R_c = \frac{V_c}{I_l} - R_l$$

Where  $I_l$  is the desired limit current and  $R_l$  is the minimum expected load resistance (0Ω for a short to ground). Bypass capacitors of 0.01μF should be used on the collectors as in Figures 1 and 2.

A more sophisticated current limit circuit which provides a limit current independent of  $R_l$  is shown below.

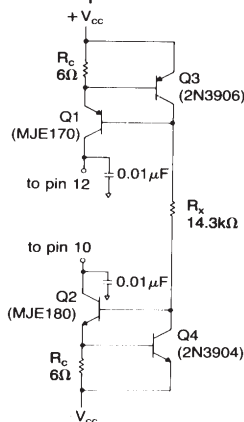


Figure 4: Active current limit circuit (100mA)

With the component values indicated, current limiting occurs at 100mA. For other values of current limit ( $I_l$ ), select  $R_c$  to equal  $V_{be}/I_l$ . Where  $V_{be}$  is the base to emitter voltage drop of Q3 (or Q4) at a current of 12V,  $-1.41/R$ , where

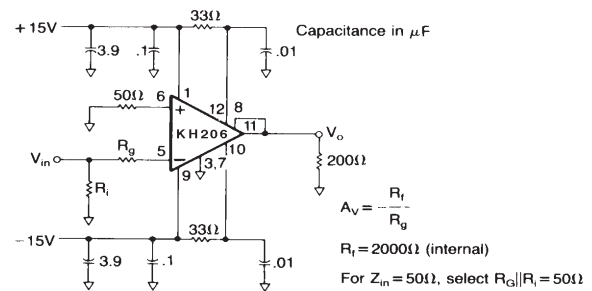


Figure 2: recommended inverting gain circuit

$R_x \leq [(2V_{cc} - 1.4)/I_l] B_{min}$ . Also,  $B_{min}$  is the minimum beta of Q1 (or Q2) at a current of  $I_l$ . Since the limit current depends on  $V_{be}$ , which is temperature dependent, the limit current is likewise temperature dependent.

### Controlling Bandwidth and Passband Response


In most applications, a feedback resistor value of 2kΩ will provide optimum performance; nonetheless, some applications may require a resistor of some other value. The response versus  $R_f$  plot on the previous page shows how decreasing  $R_f$  will increase bandwidth (and frequency response peaking, which may lead to instability). Conversely, large values of feedback resistance tend to roll off the response.

The best settling time performance requires the use of an external feedback resistor (use of the internal resistor results in a 0.1% to 0.2% settling tail). The settling performance may be improved slightly by adding a capacitance of 0.4pF in parallel with the feedback resistor (settling time specifications reflect performance with an external feedback resistor but with no external capacitance).

### Noise Analysis

Approximate noise figure can be determined for the KH206 using the equivalent input noise graph on the preceding page and the equations shown below.

Noise figure is for the network inside this box

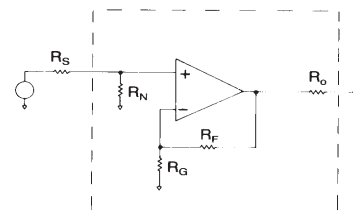

$$F = 10 \log \left[ 1 + \frac{R_s}{R_N} + \frac{R_s}{4kT} \cdot \left( i_n^2 + \frac{V_n^2}{R_p^2} + \frac{R_F^2 i_i^2}{R_p^2 A_v^2} \right) \right]$$

$$\text{where } R_p = \frac{R_s R_N}{R_s + R_N}; A_v = \frac{R_F}{R_G} + 1$$

$$kT = 4.00 \times 10^{-21} \text{ Joules at } 290^\circ\text{K}$$

$$V_n \text{ is spot noise voltage (V}/\sqrt{\text{Hz}})$$

$$i_n \text{ is non-inverting spot noise current (A}/\sqrt{\text{Hz}})$$


$$i_i \text{ is inverting spot noise current (A}/\sqrt{\text{Hz}})$$

### Printed Circuit Layout

As with any high frequency device, a good PCB layout will enhance the performance of the KH206. Good ground plane construction and power supply bypassing close to the package are critical to achieving full performance. In the non-inverting configuration, the amplifier is sensitive to stray capacitance to ground at the inverting input. Hence, the inverting node connections should be small with minimal stray capacitance to the ground plane. Shunt capacitance across the feedback resistor should not be used to compensate for this effect.

Evaluation PC boards (part number 730008 for inverting, 730009 for non-inverting) for the KH206 are available.

# KH206 Package Dimensions

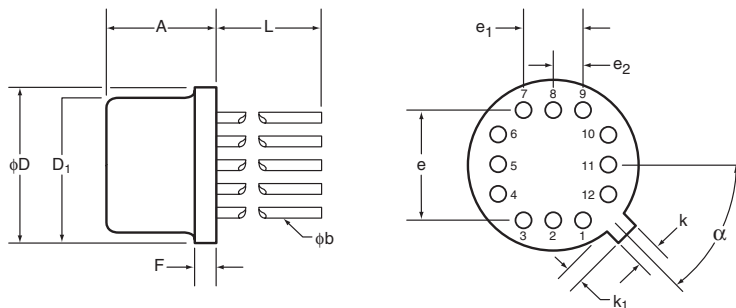

TO-8				
SYMBOL	INCHES		MILIMETERS	
	Minimum	Maximum	Minimum	Maximum
A	0.142	0.181	3.61	4.60
$\phi b$	0.016	0.019	0.41	0.48
$\phi D$	0.595	0.605	15.11	15.37
$\phi D_1$	0.543	0.555	13.79	14.10
e	0.400 BSC		10.16 BSC	
e <sub>1</sub>	0.200 BSC		5.08 BSC	
e <sub>2</sub>	0.100 BSC		2.54 BSC	
F	0.016	0.030	0.41	0.76
k	0.026	0.036	0.66	0.91
k <sub>1</sub>	0.026	0.036	0.66	0.91
L	0.310	0.340	7.87	8.64
$\alpha$	45° BSC		45° BSC	

**NOTES:**  
 Seal: cap weld  
 Lead finish: gold per MIL-M-38510  
 Package composition:  
 Package: metal  
 Lid: Type A per MIL-M-38510

**DISCLAIMER**  
 FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICES TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

**LIFE SUPPORT POLICY**  
 FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.