查询153CNQ080供应商 捷多邦，专业PCB打样工厂，24小时加急出货

PD - 2.538 11/97

International
IOR Rectifier

153CNQ... SERIES

SCHOTTKY RECTIFIER 150 Amp

Major Ratings and Characteristics

Characteristics		153CNQ...	Units
$I_{F(AV)}$	Rectangular waveform	150	A
V_{RRM}	range	80 to 100	V
I_{FSM}	@ tp = 5 µs sine	7000	A
V_F	@ 75 Apk, T_J = 125°C (per leg)	0.80	V
T_J	range	-55 to 175	°C

Description/Features

The 153CNQ... non-isolated, center tap Schottky rectifier module series has been optimized low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175° C T_J operation
- Center tap module
- Multiple leads per terminal for high frequency, high current PC board mounting
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, high current package

CASE STYLE AND DIMENSIONS

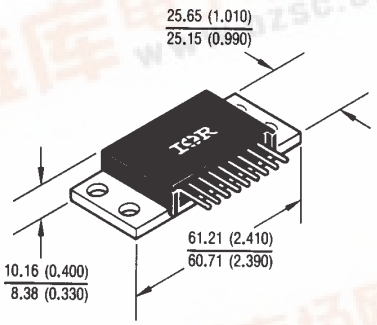

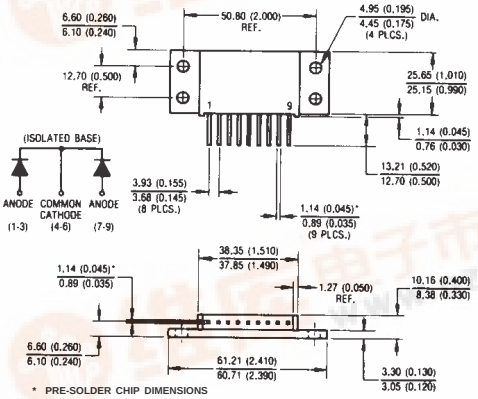

Outline D-60 (Modified JEDEC TO-249AA)
Dimensions in millimeters and inches

找PDF 维库一下 pdf.dzsc.com

Voltage Ratings

Part number		153CNQ080	153CNQ100
V_R	Max. DC Reverse Voltage (V)	80	100
V_{RWM}	Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters		153CNQ	Units	Conditions	
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	150	A	50% duty cycle @ T_C = 114 °C, rectangular wave form	
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	7000	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied
		720		10ms Sine or 6ms Rect. pulse	
E_{AS}	Non-Repetitive Avalanche Energy (Per Leg)	15	mJ	T_J = 25 °C, I_{AS} = 1 Amps, L = 30 mH	
I_{AR}	Repetitive Avalanche Current (Per Leg)	1	A	Current decaying linearly to zero in 1 µsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical	

Electrical Specifications

Parameters		153CNQ	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.96	V	@ 75A	T_J = 25 °C
		1.19	V	@ 150A	
		0.80	V	@ 75A	T_J = 125 °C
		0.99	V	@ 150A	
I_{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.5	mA	T_J = 25 °C	V_R = rated V_R
		20	mA	T_J = 125 °C	
C_T	Max. Junction Capacitance (Per Leg)	1400	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C	
L_S	Typical Series Inductance (Per Leg)	9.2	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V_R)	10,000	V/ µs		

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters			153CNQ	Units	Conditions
T_J	Max. Junction Temperature Range		-55 to 175	°C	
T_{stg}	Max. Storage Temperature Range		-55 to 175	°C	
R_{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)		0.70	°C/W	DC operation * See Fig. 4
R_{thJC}	Max. Thermal Resistance Junction to Case (Per Package)		0.35	°C/W	DC operation
R_{thCS}	Typical Thermal Resistance, Case to Heatsink		0.10	°C/W	Mounting surface, smooth and greased
wt	Approximate Weight		56(2.0)	g(oz.)	
T	Mounting Torque	Min.	40(35)	Kg-cm (lbf-in)	
		Max.	58(50)		
	Case Style		D-60 (TO-249AA)		Modified JEDEC

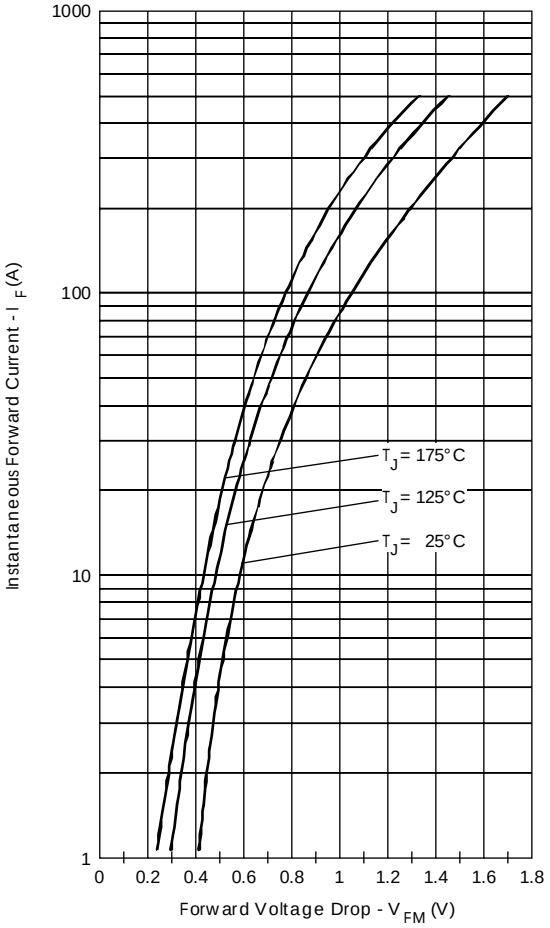

Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

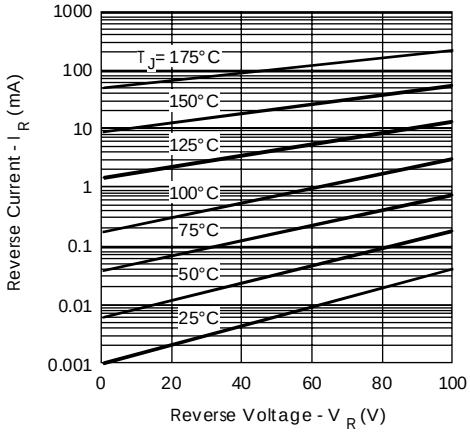

Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

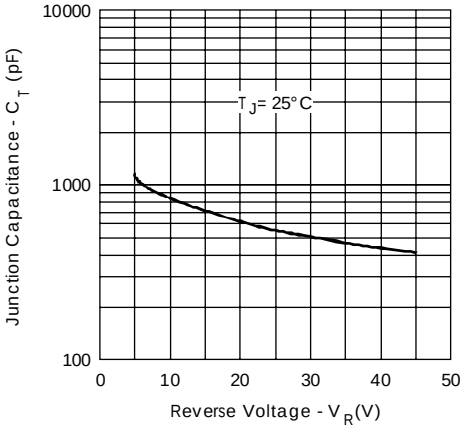

Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

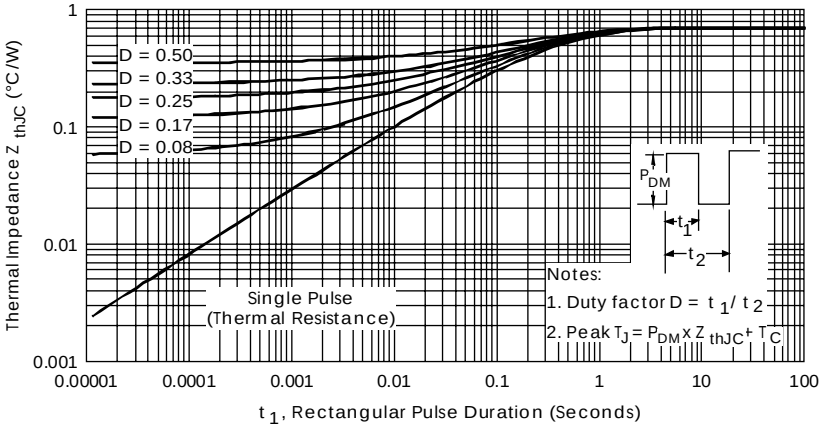

Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

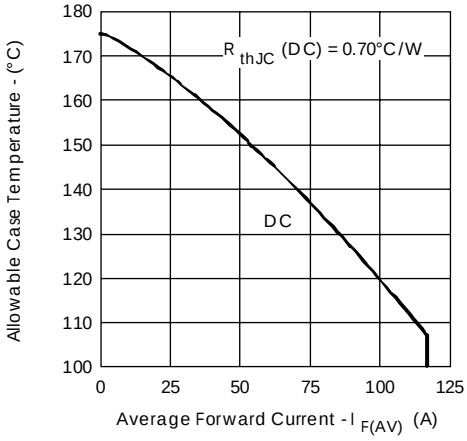

Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

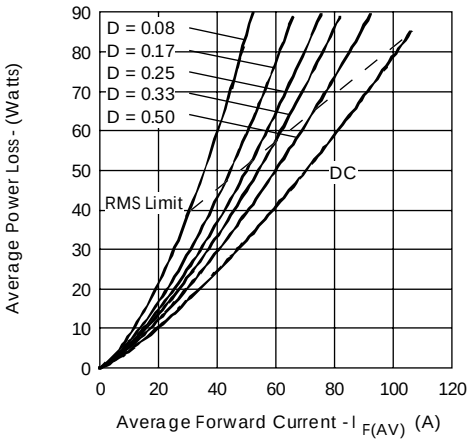

Fig. 6 - Forward Power Loss Characteristics (Per Leg)

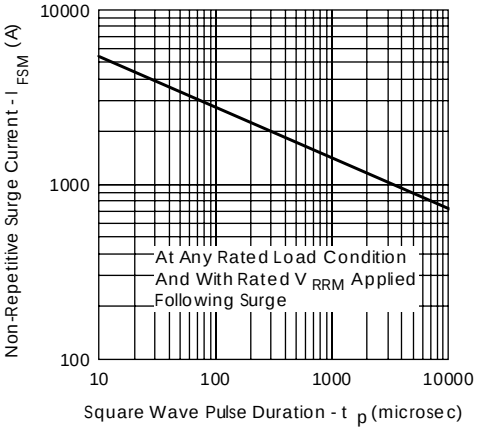

Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

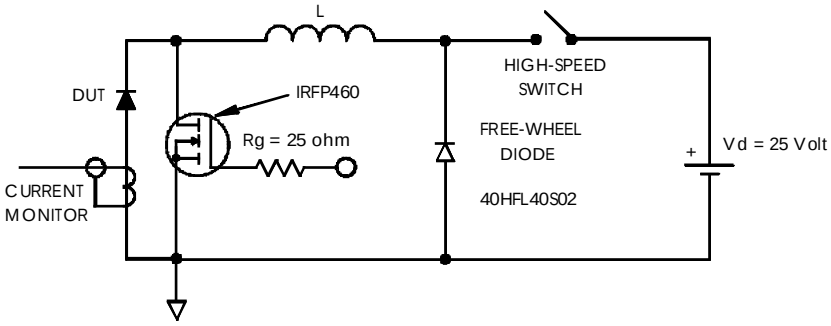

Fig. 8 - Unclamped Inductive Test Circuit