


[Part Information](#) | [Outline Drawing](#) | [Introduction](#) | [Specifications](#) | [Ordering Information](#)



Part Information:




Part Number: 159-2801-025

Description: Round and flat, aluminum and braid shield, .050 pitch, 28 awg, 25 conductors

Family: Round and Flat



Outline Drawing

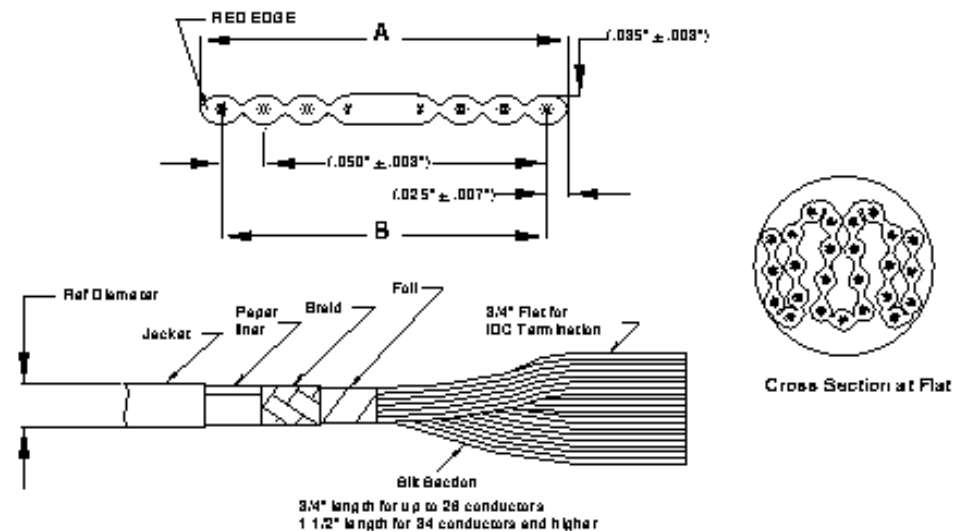

Introduction

Company Info

Press Releases

Find a Sales Location

Authorized Distributors

Related Interconnect Links

www.Amphenol.com

Information Request

Add to Information Request

Products

New! Product Information

SCSI Cable Application Info

Internal SCSI

Serial Attached SCSI

Ultra320 SCSI

High Speed Development

InfiniBand

10Gb Ethernet

High Bandwidth SKEWCLEAR

Fibre Channel

Zero Halogen

Internal Zip / Twisted Pair

External Flat Shielded

External Round Shielded

Internal Round Unshielded

Flat High Temp

Ultra ATA

Serial ATA

Flat Coax

Fiber Optics

Round 'n' Flat cable combines the handling and shielding features of round cable and the mass termination capabilities of flat cable into a single construction. This product is designed for routing in tight spaces where a round shape is more practical and where a foil braid shield is necessary to help meet FCC requirements for EMI/RFI suppression.

The inner cable is extruded Spectra-Zip with alternating sections that are flat and slit. Each flat section is 3/4" in length with conductors on controlled spacing of .050" $\pm$.003" making it ideally suited for IDC mass termination methods. The alternating flat and slit sections also offer an advantage over standard round cable for hand termination. The flat sections keep the conductors aligned for conductor positioning while the slit zip feature provides easy breakout of individual conductors

One edge of the flat cable is marked for conductor referencing. Two layers of shielding, aluminum- polyester foil and tinned copper braid are used to protect signals from EMI interference.

Benefits

- Round cable that mass terminates
- High flexibility
- Helps meet FCC requirements
- UL, CL2
- CSA Certified



Specifications

Physical	
Conductors	28 AWG, 7/36 Tinned Copper
Color code	Gray with Red Edge
Insulation	PVC, .010" WALL Thickness: .035" $\pm$.003"
Pitch	.050" $\pm$.00"
Shielding	Aluminum/Polyester Foil, with Minimum 85% Coverage Tinned Copper Braid
Jacket	Black PVC, .030" nom Wall
Liner	Paper Liner Between Jacket and Braid
Temperature Rating	-20°C to +105°C (-4°F to 221°F)
UL style	Inner Cable: 2651
Composite	UL Listed Power Limited Circuit Cable CL2 CSA AWM I/II A 105°C 300V, FT-1

Electrical

