


Operating Voltage = 250/480 V~, 50 / 60 Hz
 Operating Voltage = 125/208 V~, 50 - 400 Hz
 Operating Current = 10, 15 Amp / Phase
 Temperature Range = -20 TO 50 Deg. C
 Diel. Withstand (L-CASE) = 1500 V~ FOR 1 MIN.
 Diel. Withstand (L-L) = 1500 Vdc For 1 Min.
 Leakage Current = 3.8 ma @ 250 V~, 60 Hz
 Discharge Volt after 1.0 second = 24 V Max.
 Maximum Capacitance each line to case = 0.02 μ F





Order P/N: 10 Amp: CC-1138-10
 15 Amp: CC-1138-15

The 1138 series is a 3 phase WYE filter. This series is designed to be used with military systems which are requires to meet the conducted emissions of MIL STD-461C / CE03.

Minor modifications can be done to adjust the filter configuration in order to meet any special environmental or vibration specifications.

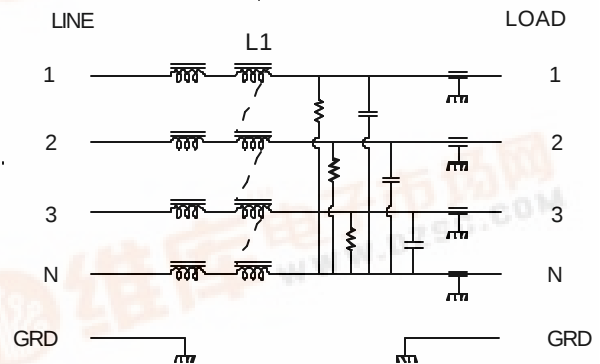

INSERTION LOSS vs FREQUENCY
 1138 SERIES

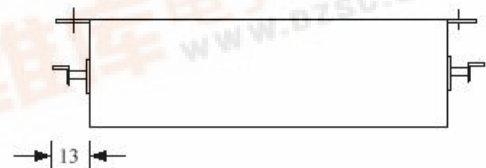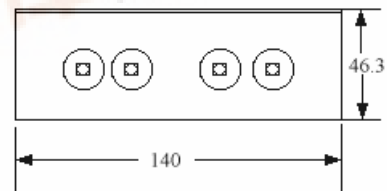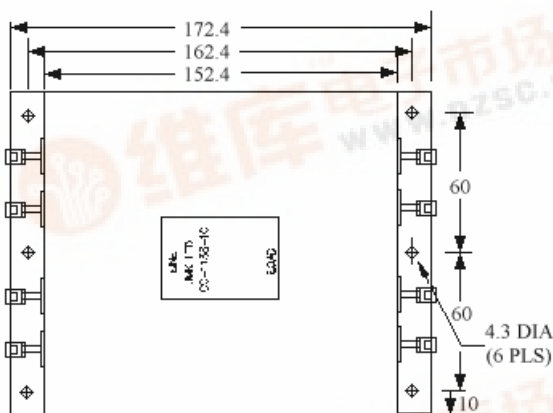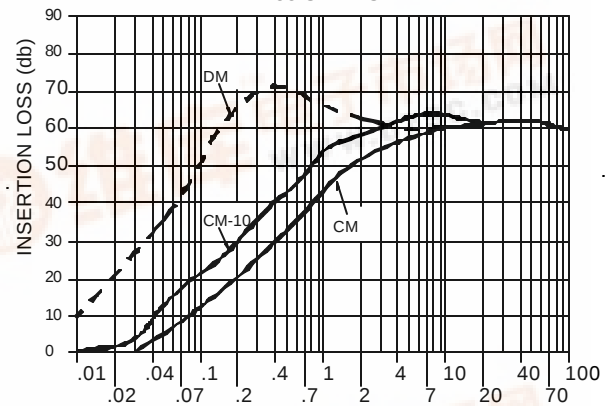

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115

email: info@jmkfilters.com

EUR JMK Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141 589 1884