


查询16770供应商

捷多邦，专业PCB打样工厂，24小时加急出货

VICOR CONFIDENTIAL
THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVE
01	RELEASED PER E980365 DPK	9/14/98	RCM
02	REVSD- E980451 RCM	12/1/98	DPK
03	REVSD PER E990386 AK	9/14/99	RCM
04	REVSD PER E990450 RCM	3/6/00	DPK

VICOR HUB PART NO.	MATING CONNECTOR		
	ORDER FROM:		ORDER FROM:
	AMP		VICOR
	HOUSING (QTY 1)	PINS (QTY 2)	HOUSING/PINS KIT (QTY 1)
HUB820-P	770017-1	770248-1	21395

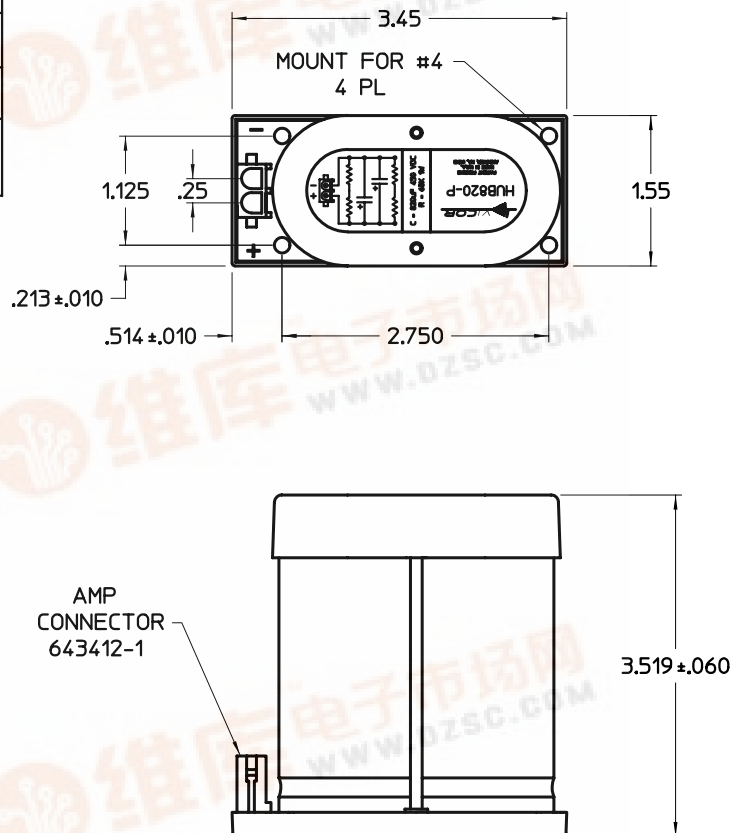

NON
CONDUCTIVE
COVER

NON
CONDUCTIVE
BASE

AMP
CONNECTOR
643412-1

AT +105°C, 120HZ UNLESS OTHERWISE NOTED					
ITEM	CHARACTERISTICS				
OPERATING TEMPERATURE	-25 to +105°C				
CAPACITANCE TOLERANCE @ +20°C	±20%				
RIPPLE CURRENT MULTIPLIER	AMBIENT TEMPERATURE (°C)				
	+45	+60	+70	+85	+105
DISSIPATION FACTOR @ +20°C	2.64	2.23	2.12	1.73	1.00
RATED VOLTAGE (WVDC)	0.1				
CAPACITANCE VALUE (C1, C2 EA ±5%)	200				
	820				

DRAWN BY	DATE
D.CYZNAR	4/2/98
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	
±1/64	±.01 °1°
±.005	±.005 °1°

VICOR
OUTLINE DRAWING,
HUB820-P