

Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog



The illustration shows a 4-position version

Order No.	1682757
Ord designation	SAC-5P-M12MR/ 1,5-PUR SH

EAN	4017918169060
Pack	1 Pcs.
Customs tariff	85445190
Catalog page information	Page 87 (PC-2005)

► Technical data

General data


Nominal current I_N	4 A
Rated voltage in acc. with IEC 61076-2-101	60 V
Rated voltage (II/3)	160 V
Number of positions	5
Contact resistance	$\leq 5 \text{ m}\Omega$
Ambient temperature (operation)	-25 ° C ... 90 ° C (Cable, fixed installation)
Ambient temperature (operation)	-5 ° C ... 90 ° C (Cable, flexible installation)
Ambient temperature (operation)	-25 ° C ... 90 ° C (Male/female connector)

General characteristics


Fixed cable length	1.5 m
Insulating material	TPU
Material contact surface	Ni/Au
Material contact	CuSn
Degree of protection	IP67
Conductor cross section flexible min.	0.34 mm ²
Conductor cross section, flexible max.	0.34 mm ²
Individual wires per module	42
Single wire diameter	0.1 mm
Contact resistance	$\leq 5 \text{ m}\Omega$

► Drawings

Diagram

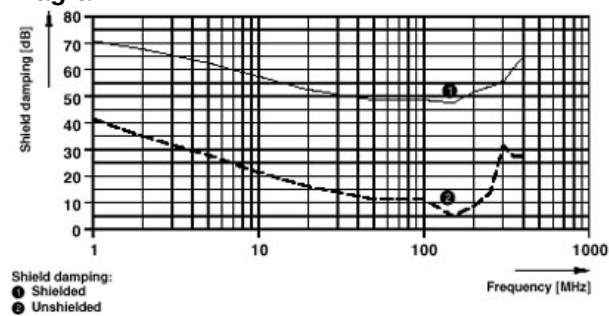

Dimensioned drawing

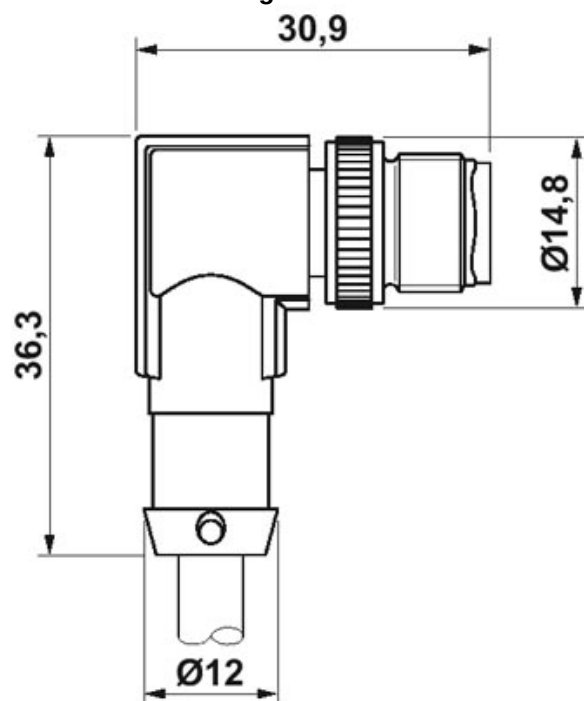

Circuit diagram



Schematic diagram



► Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>
Phoenix Contact
Technical modifications reserved;