

► General data



Sensor/actuator cable, shielded, straight socket M 12, 4-pos., cable length: 3 m

Order number	1682854
Type	SAC-4P- 3,0-PUR/M12FS SH

Barcode number	4017918169169
Unit pack	1 Pcs.
Customs tariff	85445190000

► Technical data

General data


Nominal current I_N	4 A
Rated voltage (II/3)	320 V
Number of positions	4
Contact resistance	5 mOhm
Ambient temperature (operation)	-30 °C ... 80 °C (Cable, fixed installation)
Ambient temperature (operation)	-5 °C ... 70 °C (Cable, flexible installation)
Ambient temperature (operation)	-25 °C ... 90 °C (Male/female connector)

General characteristics


Fixed cable length	3 m
Insulating material	TPU
Material contact surface	Ni/Au
Material contact	CuSn
Degree of protection	IP 67
Conductor cross section flexible min.	0.34 mm ²
Max. conductor cross section, flexible	0.34 mm ²
Single wire, number	42
Single wire diameter	0.1 mm
Contact resistance	5 mOhm

▶ Drawings


Diagram




Dimensioned drawing

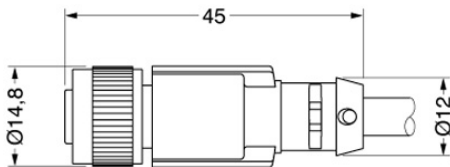

Circuit diagram

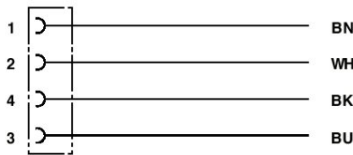

Schematic diagram



► Documentation

Data Sheet

5126251_00_GB.pdf

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel + 49 - (0) 52 35 - 3-00
Fax + 49 - (0) 52 35 - 3-4 12 00
www.phoenixcontact.com

© Phoenix Contact
Technical modifications reserved