
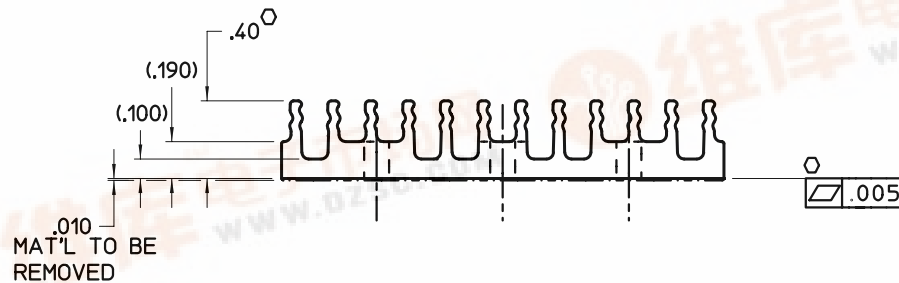
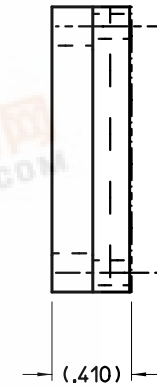


查询18074供应商

捷多邦，专业PCB打样工厂，24小时加急出货

VICOR CONFIDENTIAL
THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
#1	RELEASED FOR DEVELOPMENT	DPK 11/19/97	SWN
#2	ADDED ±.010 TOL TO DIM	DPK 12/8/97	SWN
#3	.49 WAS .490: REMOVED P/N STAMPING	DPK 8/24/98	SWN
#4	1.47 WAS 1.470	DPK 9/2/98	SWN
#5	.40 WAS .400: ADDED '0' TO .100 & .190	DPK 9/11/98	SWN
#6	ADDED NOTE 4, CRITICAL CHA.'0'	AK 10/5/99	SWN

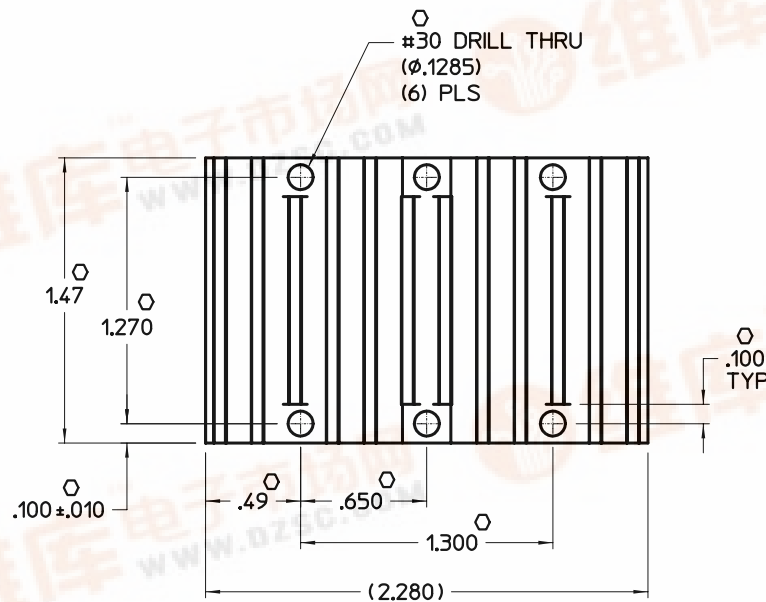

1. MAKE FROM VICOR EXTRUSION P/N 16296.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINISH. CLEAR CHROMATE.
4. '0' DENOTES CRITICAL CHARACTERISTICS FOR

DRAWN BY	DATE
D.P. KELLY	11/87
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES 1/64 .01 .01°	

VICOR
HTSNK, "C" X-FLOW, .4H
LOW FLOW THRU HOLE