

- Direct Upgrades to TL05x, TL07x, and TL08x BiFET Operational Amplifiers
- Greater Than 2× Bandwidth (10 MHz) and 3× Slew Rate (45 V/ μ s) Than TL08x

- On-Chip Offset Voltage Trimming for Improved DC Performance
- Wider Supply Rails Increase Dynamic Signal Range to ± 19 V

description

The TLE208x series of JFET-input operational amplifiers more than double the bandwidth and triple the slew rate of the TL07x and TL08x families of BiFET operational amplifiers. The TLE208x also have wider supply-voltage rails, increasing the dynamic-signal range for BiFET circuits to ± 19 V. On-chip zener trimming of offset voltage yields precision grades for greater accuracy in dc-coupled applications. The TLE208x are pin-compatible with lower performance BiFET operational amplifiers for ease in improving performance in existing designs.

BiFET operational amplifiers offer the inherently higher input impedance of the JFET-input transistors, without sacrificing the output drive associated with bipolar amplifiers. This makes these amplifiers better suited for interfacing with high-impedance sensors or very low level ac signals. They also feature inherently better ac response than bipolar or CMOS devices having comparable power consumption.

Because BiFET operational amplifiers are designed for use with dual power supplies, care must be taken to observe common-mode input-voltage limits and output voltage swing when operating from a single supply. DC biasing of the input signal is required and loads should be terminated to a virtual ground node at mid-supply. Texas Instruments TLE2426 integrated virtual ground generator is useful when operating BiFET amplifiers from single supplies.

The TLE208x are fully specified at ± 15 V and ± 5 V. For operation in low-voltage and/or single-supply systems, Texas Instruments LinCMOS™ families of operational amplifiers (TLC- and TLV-prefix) are recommended. When moving from BiFET to CMOS amplifiers, particular attention should be paid to slew rate and bandwidth requirements and output loading.

For BiFET circuits requiring low noise and/or tighter dc precision, the TLE207x offer the same ac response as the TLE208x with more stringent dc and noise specifications.

 Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



LinCMOS is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date.
Products conform to specifications per the terms of Texas Instruments
standard warranty. Production processing does not necessarily include
testing of all parameters.

Copyright © 2000, Texas Instruments Incorporated

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081 AVAILABLE OPTIONS

TA	V _{I0max} AT 25°C	PACKAGED DEVICES				CHIP FORM (Y)
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (JG)	PLASTIC DIP (P)	
0°C to 70°C	3 mV 6 mV	TLE2081ACD TLE2081CD	—	—	TLE2081ACP TLE2081CP	— TLE2081Y
-55°C to 125°C	3 mV 6 mV	—	TLE2081AMFK TLE2081MFK	TLE2081AMJG TLE2081MJG	—	—

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2081ACDR).

‡ Chip forms are tested at TA = 25°C only.

TLE2082 AVAILABLE OPTIONS

TA	V _{I0max} AT 25°C	PACKAGED DEVICES				CHIP FORM (Y)
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (JG)	PLASTIC DIP (P)	
0°C to 70°C	4 mV 7 mV	TLE2082ACD TLE2082CD	—	—	TLE2082ACP TLE2082CP	—
-40°C to 85°C	4 mV 7 mV	TLE2082AID TLE2082ID	—	—	TLE2082AIP TLE2082IP	TLE2082Y
-55°C to 125°C	4 mV 7 mV	TLE2082AMD TLE2082MD	TLE2082AMFK TLE2082MFK	TLE2082AMJG TLE2082MJG	TLE2082AMP TLE2082MP	—

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2082ACDR).

‡ Chip forms are tested at TA = 25°C only.

TLE2084 AVAILABLE OPTIONS


TA	V _{I0max} AT 25°C	PACKAGED DEVICES				CHIP FORM (Y)
		SMALL OUTLINE (DW)	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)	
0°C to 70°C	4 mV 7 mV	TLE2084ACDW TLE2084CDW	—	—	TLE2084ACN TLE2084CN	— TLE2084Y
-55°C to 125°C	4 mV 7 mV	—	TLE2084AMFK TLE2084MFK	TLE2084AMJ TLE2084MJ	—	—

† The DW packages are available taped and reeled. Add R suffix to device type (e.g., TLE2084ACDWR).

‡ Chip forms are tested at TA = 25°C only.


**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

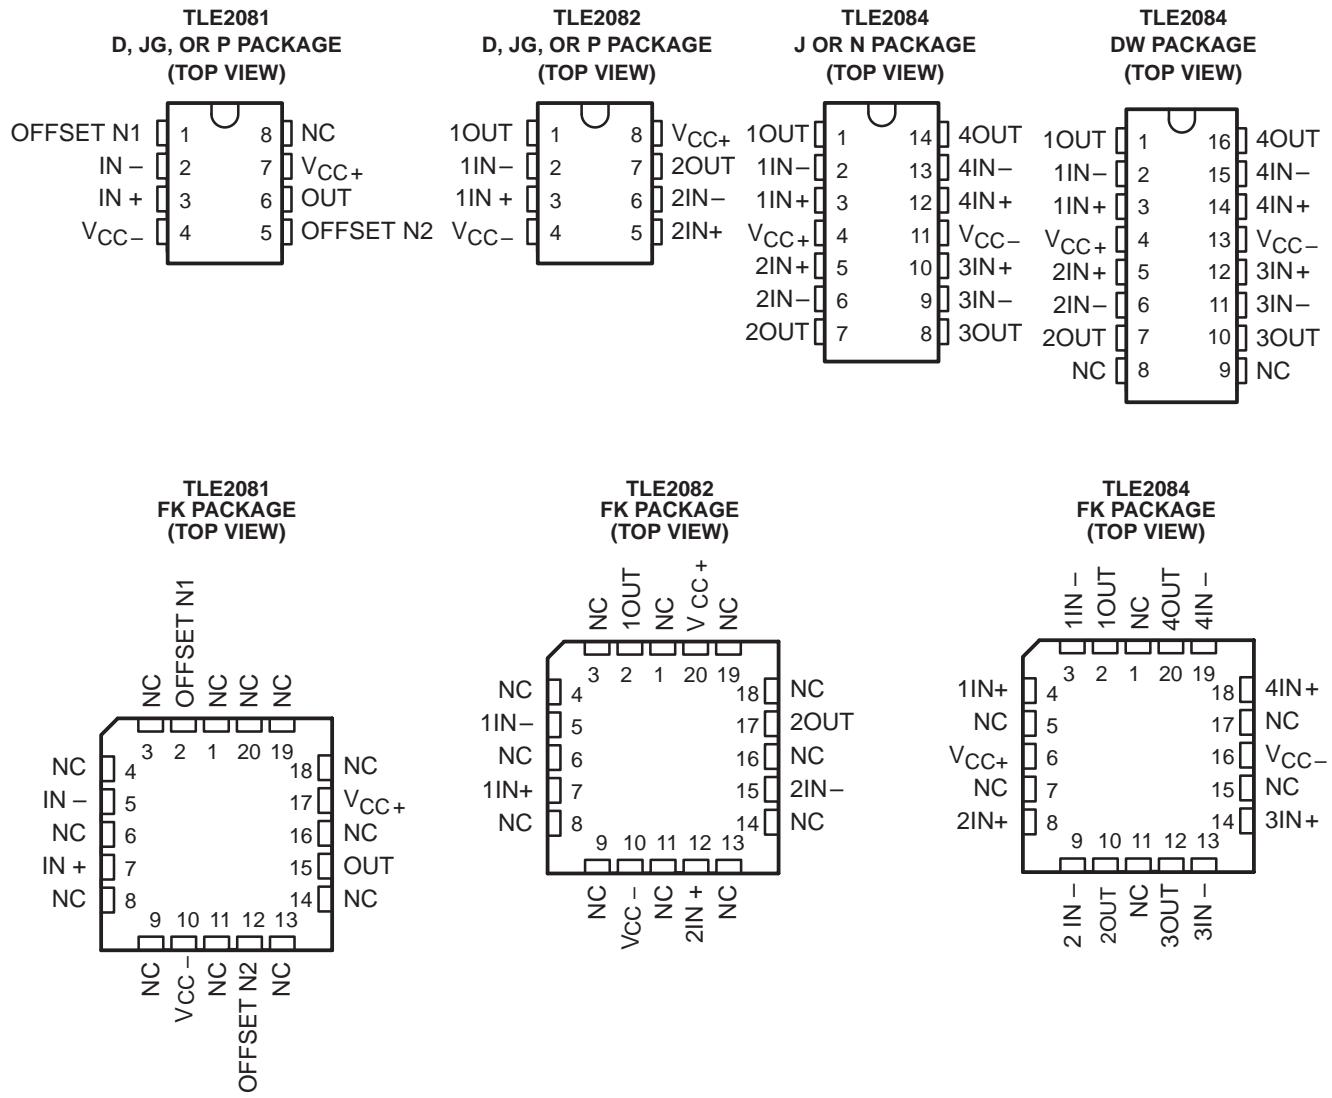

NC – No internal connection

symbol




TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081Y chip information

This chip, when properly assembled, displays characteristics similar to the TLE2081. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

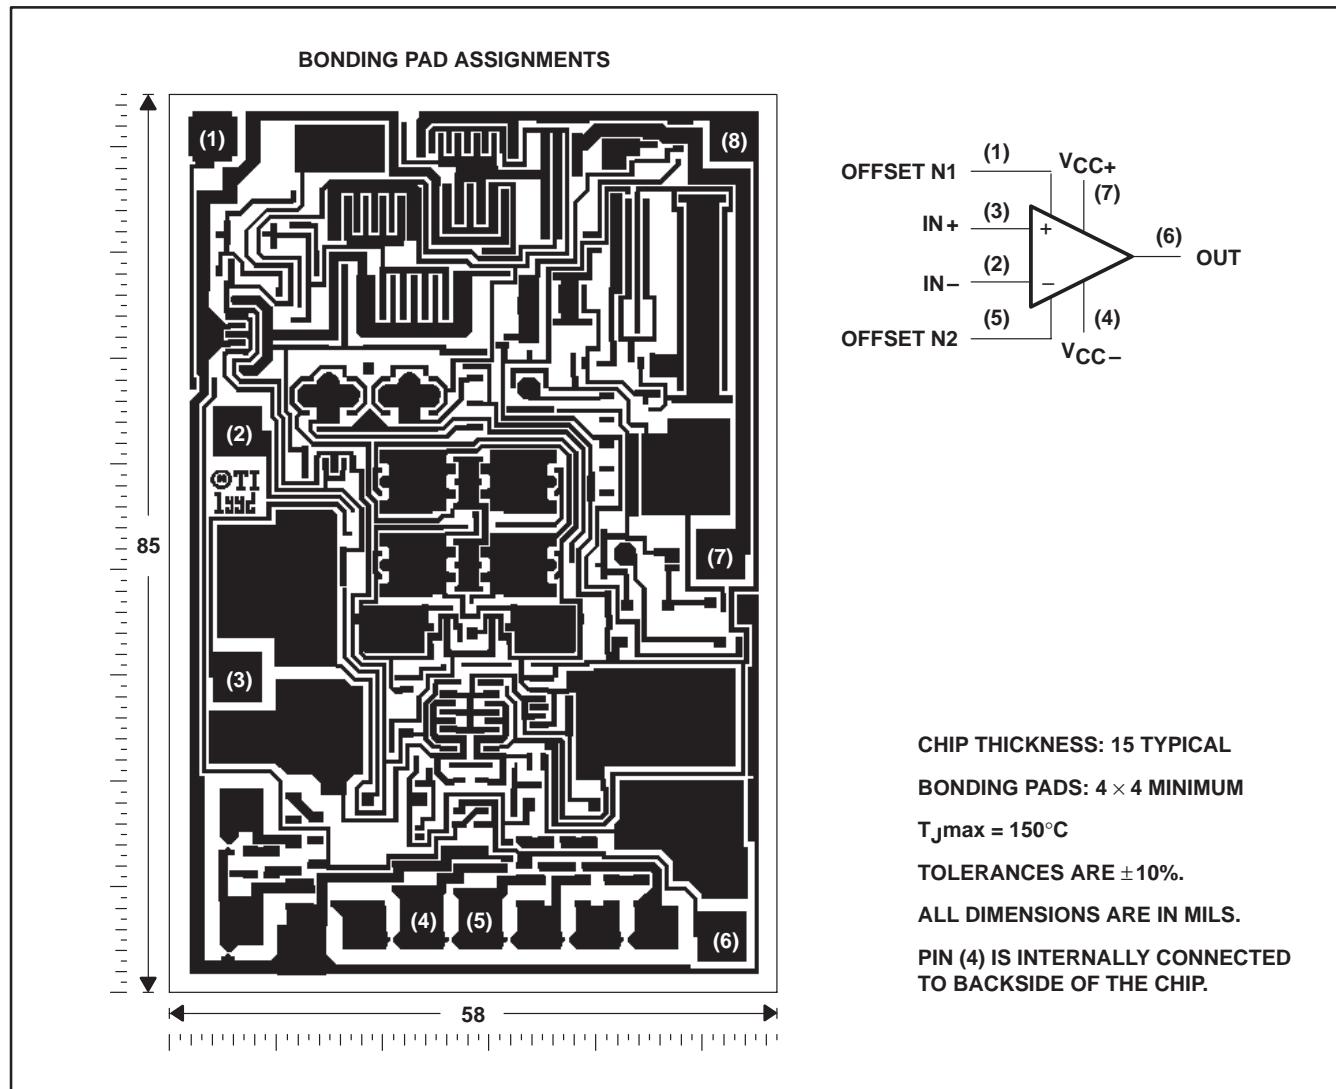


**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082Y chip information

This chip, when properly assembled, displays characteristics similar to the TLE2082. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

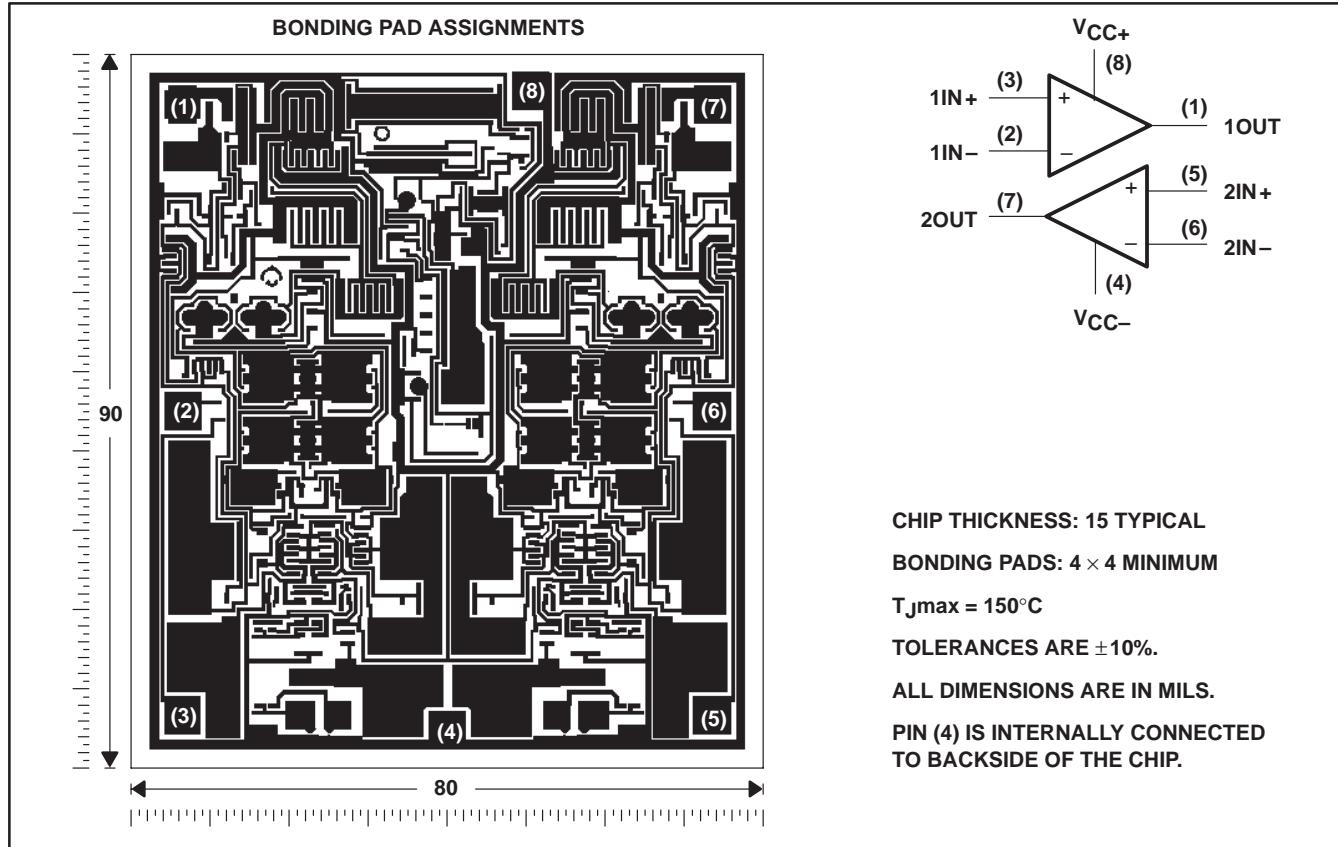


TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000


TLE2084Y chip information

This chip, when properly assembled, displays characteristics similar to the TLE2084. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

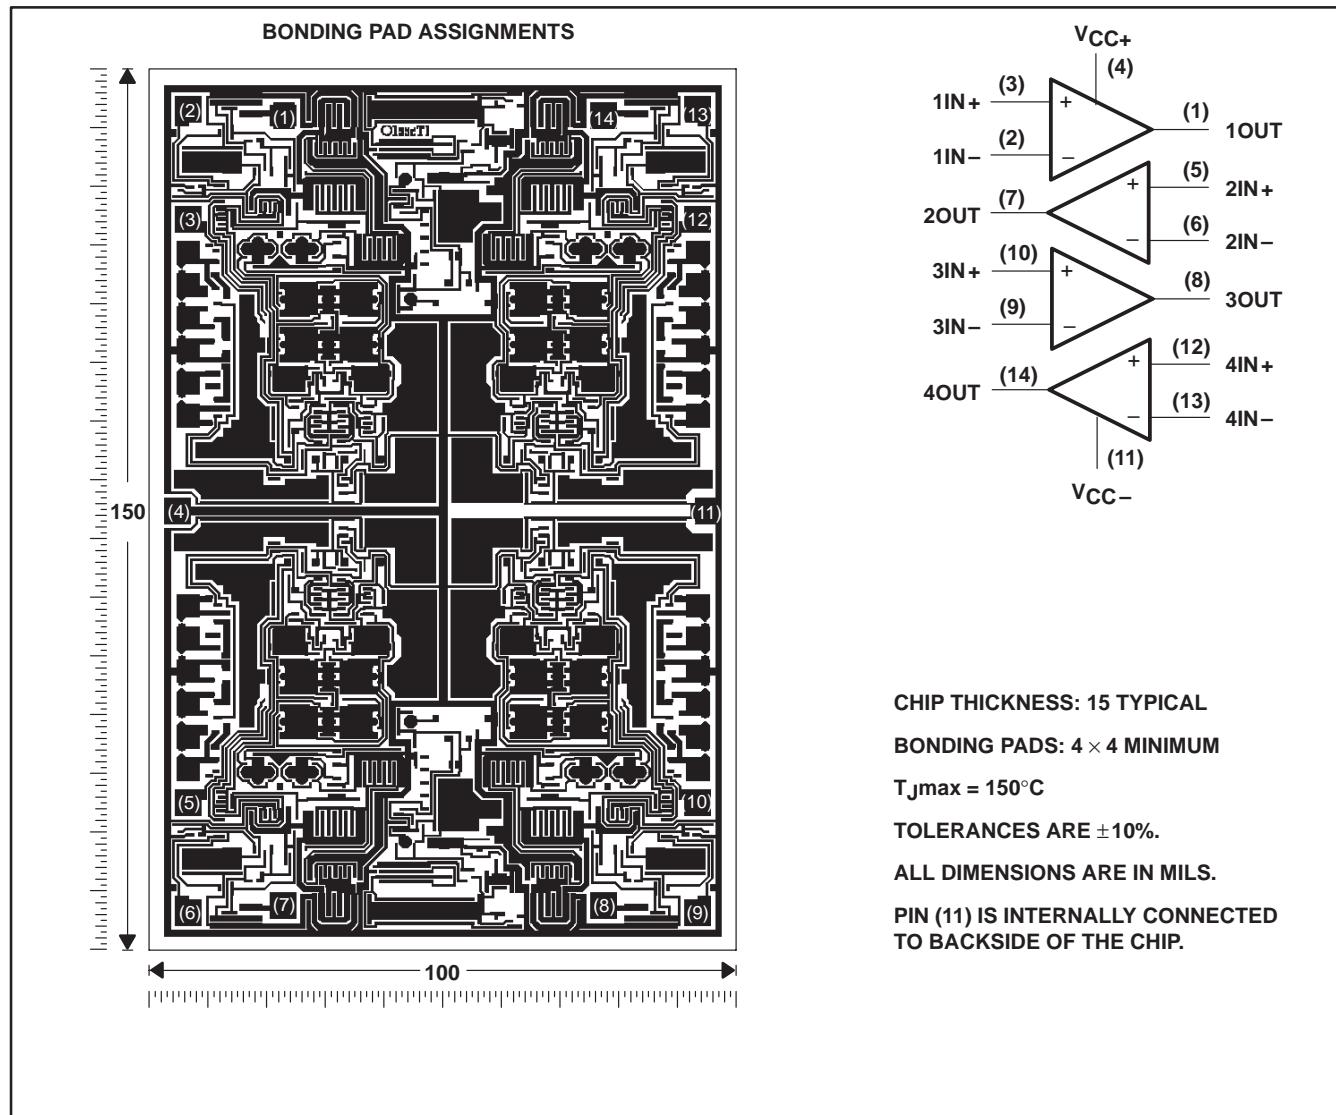

TLE208x, TLE208xA, TLE208xY
**EXCALIBUR HIGH-SPEED JFET-INPUT
 OPERATIONAL AMPLIFIERS**
 SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

equivalent schematic (each channel)

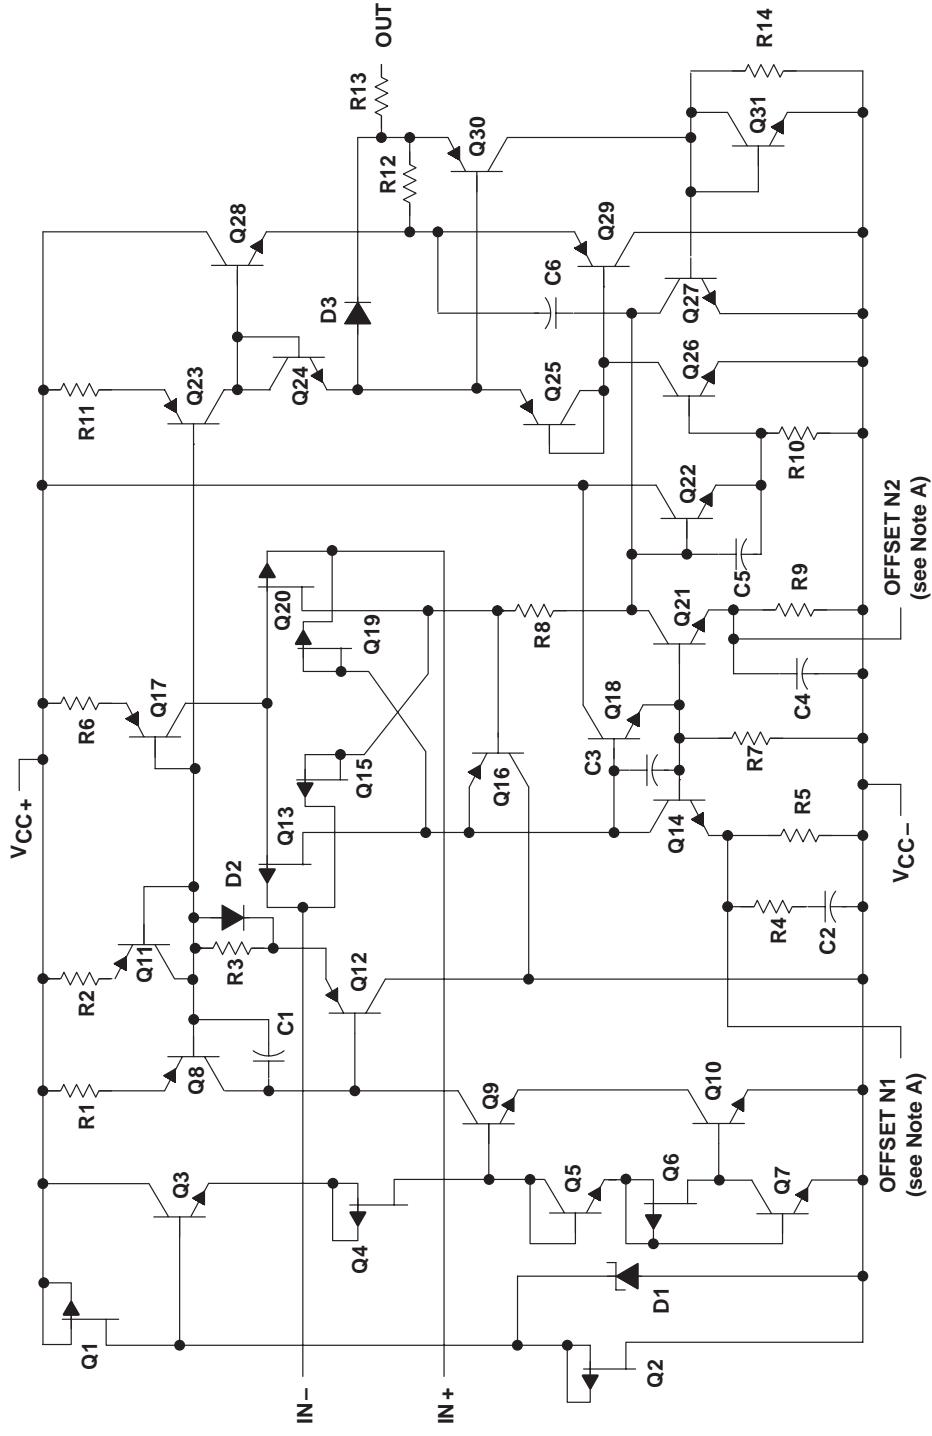

NOTE A: OFFSET N1 AND OFFSET N2 are only available on the TLE2081x devices.
 (see Note A)

ACTUAL DEVICE COMPONENT COUNT			
COMPONENT	TLE2081	TLE2082	TLE2084
Transistors	33	57	114
Resistors	25	37	74
Diodes	8	5	10
Capacitors	6	11	22

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage, V_{CC+} (see Note 1)	19 V
Supply voltage, V_{CC-} (see Note 1)	-19 V
Differential input voltage range, V_{ID} (see Note 2)	V_{CC+} to V_{CC-}
Input voltage range, V_I (any input)	V_{CC+} to V_{CC-}
Input current, I_I (each input)	± 1 mA
Output current, I_O (each output)	± 80 mA
Total current into V_{CC+}	160 mA
Total current out of V_{CC-}	160 mA
Duration of short-circuit current at (or below) 25°C (see Note 3)	unlimited
Continuous total dissipation	See Dissipation Rating Table
Operating free-air temperature range, T_A : C suffix	0°C to 70°C
I suffix	-40°C to 85°C
M suffix	-55°C to 125°C
Storage temperature range	-65°C to 150°C
Case temperature for 60 seconds: FK package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: DW or N package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package	300°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .
 2. Differential voltages are at IN+ with respect to IN-.
 3. The output can be shorted to either supply. Temperatures and/or supply voltages must be limited to ensure that the maximum dissipation rate is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 85^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING		
						C SUFFIX	I SUFFIX
MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
D	725 mW	5.8 mW/°C	464 mW	377 mW	145 mW		
DW	1025 mW	8.2 mW/°C	656 mW	533 mW	205 mW		
FK	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW		
J	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW		
JG	1050 mW	8.4 mW/°C	672 mW	546 mW	210 mW		
N	1150 mW	9.2 mW/°C	736 mW	598 mW	230 mW		
P	1000 mW	8.0 mW/°C	640 mW	344 mW	200 mW		

recommended operating conditions

		C SUFFIX		I SUFFIX		M SUFFIX		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
Supply voltage, $V_{CC\pm}$		± 2.25	± 19	± 2.25	± 19	± 2.25	± 19	V
Common-mode input voltage, V_{IC}	$V_{CC\pm} = \pm 5$ V	-0.9	5	-0.8	5	-0.8	5	V
	$V_{CC\pm} = \pm 15$ V	-10.9	15	-10.8	15	-10.8	15	
Operating free-air temperature, T_A		0	70	-40	85	-55	125	°C

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TA†	TLE2081C			TLE2081AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V _{IO}	Input offset voltage $V_{IC} = 0$, $R_S = 50 \Omega$	25°C	0.34	6	0.3	3			mV
αV_{IO}		Full range		8			5		
I _{IO}	Input offset current $V_{IC} = 0$, See Figure 4	Full range	3.2	29		3.2	29		$\mu V^\circ C$
I _{IB}		25°C	5	100		5	100		nA
		Full range		1.4			1.4		
		25°C	15	175		15	175		nA
		Full range		5			5		
V _{ICR}	Common-mode input voltage range $R_S = 50 \Omega$	25°C	5 to -1	5 to -1.9		5 to -1	5 to -1.9		V
		Full range	5 to -0.9			5 to -0.9			
V _{OM+}	$I_O = -200 \mu A$	25°C	3.8	4.1		3.8	4.1		V
		Full range	3.7			3.7			
	$I_O = -2 \text{ mA}$	25°C	3.5	3.9		3.5	3.9		
		Full range	3.4			3.4			
	$I_O = -20 \text{ mA}$	25°C	1.5	2.3		1.5	2.3		
		Full range	1.5			1.5			
V _{OM-}	$I_O = 200 \mu A$	25°C	-3.5	-4.2		-3.5	-4.2		V
		Full range	-3.4			-3.4			
	$I_O = 2 \text{ mA}$	25°C	-3.7	-4.1		-3.7	-4.1		
		Full range	-3.6			-3.6			
	$I_O = 20 \text{ mA}$	25°C	-1.5	-2.4		-1.5	-2.4		
		Full range	-1.5			-1.5			
AVD	Large-signal differential voltage amplification $V_O = \pm 2.3 \text{ V}$	$R_L = 600 \Omega$	25°C	80	91	80	91		dB
			Full range	79		79			
		$R_L = 2 \text{ k}\Omega$	25°C	90	100	90	100		
			Full range	89		89			
		$R_L = 10 \text{ k}\Omega$	25°C	95	106	95	106		
			Full range	94		94			
r _i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}		Ω	
c _i	Input capacitance	$V_{IC} = 0$, See Figure 5	Common mode	25°C	11		11		pF
			Differential	25°C	2.5		2.5		
z _o	Open-loop output impedance	f = 1 MHz	25°C	80		80		Ω	
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	70	89	70	89		dB
			Full range	68		68			
k _{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB
			Full range	80		80			

† Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081C			TLE2081AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{CC}	Supply current $V_O = 0$, No load	25°C	1.35	1.6	2.2	1.35	1.6	2.2	mA
		Full range			2.2			2.2	
I_{OS}	Short-circuit output current $V_O = 0$	$V_{ID} = 1$ V $V_{ID} = -1$ V	25°C	–35		–35		mA	
				45		45			

† Full range is 0°C to 70°C.

TLE2081C operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081C			TLE2081AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR +	Positive slew rate $V_O(PP) = \pm 2.3$ V, $AVD = -1$, $R_L = 2$ kΩ, $C_L = 100$ pF, See Figure 1	25°C	35			35			V/μs
		Full range	23			23			
SR –	Negative slew rate	25°C	38			38			V/μs
		Full range	23			23			
t_s	Settling time $AVD = -1$, 2-V step, $R_L = 1$ kΩ, $C_L = 100$ pF	To 10 mV	25°C	0.25		0.25		μs	
		To 1 mV		0.4		0.4			
V_n	Equivalent input noise voltage	$f = 10$ Hz	25°C	28		28		nV/√Hz	
		$f = 10$ kHz		11.6		11.6			
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage See Figure 3	$f = 10$ Hz to 10 kHz	25°C	6		6		μV	
		$f = 0.1$ Hz to 10 Hz		0.6		0.6			
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10$ kHz	25°C	2.8		2.8		fA/\sqrt{Hz}	
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 5$ V, $AVD = 10$, $f = 1$ kHz, $R_L = 2$ kΩ, $R_S = 25$ Ω	25°C	0.013%		0.013%			
B_1	Unity-gain bandwidth	$V_I = 10$ mV, $R_L = 2$ kΩ, $C_L = 25$ pF, See Figure 2	25°C	9.4		9.4		MHz	
B_{OM}	Maximum output-swing bandwidth	$V_O(PP) = 4$ V, $AVD = -1$, $R_L = 2$ kΩ, $C_L = 25$ pF	25°C	2.8		2.8		MHz	
ϕ_m	Phase margin at unity gain	$V_I = 10$ mV, $R_L = 2$ kΩ, $C_L = 25$ pF, See Figure 2	25°C	56°		56°			

† Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081C			TLE2081AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage $V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	0.49	6	6	0.47	3	3	mV
αV_{IO}		Full range		8			5	5	
I_{IO}	Temperature coefficient of input offset voltage $V_{IC} = 0$, $V_O = 0$, See Figure 4	Full range	3.2	29	29	3.2	29	29	$\mu V^\circ C$
I_{IB}		25°C	6	100	100	6	100	100	nA
		Full range		1.4			1.4	1.4	
		25°C	20	175	175	20	175	175	nA
		Full range		5			5	5	
V_{ICR}	Common-mode input voltage range $R_S = 50 \Omega$	25°C	15 to -11	15 to -11.9	15 to -11.9	15 to -11	15 to -11.9	15 to -11.9	V
		Full range	15 to -10.9		15 to -10.9	15 to -10.9		15 to -10.9	
V_{OM+}	$I_O = -200 \mu A$	25°C	13.8	14.1	14.1	13.8	14.1	14.1	V
		Full range	13.7			13.7		13.7	
	$I_O = -2 mA$	25°C	13.5	13.9	13.9	13.5	13.9	13.9	
		Full range	13.4			13.4		13.4	
	$I_O = -20 mA$	25°C	11.5	12.3	12.3	11.5	12.3	12.3	
		Full range	11.5			11.5		11.5	
V_{OM-}	$I_O = 200 \mu A$	25°C	-13.8	-14.2	-14.2	-13.8	-14.2	-14.2	V
		Full range	-13.7			-13.7		-13.7	
	$I_O = 2 mA$	25°C	-13.5	-14	-14	-13.5	-14	-14	
		Full range	-13.4			-13.4		-13.4	
	$I_O = 20 mA$	25°C	-11.5	-12.4	-12.4	-11.5	-12.4	-12.4	
		Full range	-11.5			-11.5		-11.5	
A_{VD}	$V_O = \pm 10 V$	$R_L = 600 \Omega$	25°C	80	96	80	96	96	dB
			Full range	79		79		79	
		$R_L = 2 k\Omega$	25°C	90	109	90	109	109	
			Full range	89		89		89	
		$R_L = 10 k\Omega$	25°C	95	118	95	118	118	
			Full range	94		94		94	
r_i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}		Ω	
c_i	Input capacitance See Figure 5	$V_{IC} = 0$, See Figure 5	Common mode	25°C	7.5	7.5	7.5	7.5	pF
			Differential	25°C	2.5	2.5	2.5	2.5	
z_o	Open-loop output impedance	$f = 1 MHz$	25°C	80		80		Ω	
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98	80	98	98	dB
			Full range	79		79		79	
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 V$ to $\pm 15 V$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99	99	dB
			Full range	80		80		81	

[†] Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081C			TLE2081AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
			25°C	1.35	1.7	2.2	1.35	1.7	2.2
I_{CC}	Supply current $V_O = 0$, No load	Full range			2.2			2.2	
		25°C	-30	-45		-30	-45		mA
I_{OS}	Short-circuit output current $V_O = 0$	$V_{ID} = 1$ V	30	48		30	48		
		$V_{ID} = -1$ V							

† Full range is 0°C to 70°C.

TLE2081C operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081C			TLE2081AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR + Positive slew rate	$V_O(PP) = 10$ V, $A_{VD} = -1$, $R_L = 2$ kΩ, $C_L = 100$ pF, See Figure 1	25°C	30	40		30	40		V/μs
		Full range	27			27			
SR − Negative slew rate		25°C	30	45		30	45		V/μs
		Full range	27			27			
t_s Settling time	$A_{VD} = -1$, 10-V step, $R_L = 1$ kΩ, $C_L = 100$ pF	To 10 mV	25°C	0.4		0.4			μs
		To 1 mV		1.5		1.5			
V_n Equivalent input noise voltage		$f = 10$ Hz	25°C	28		28			nV/√Hz
		$f = 10$ kHz		11.6		11.6			
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage	$R_S = 20$ Ω, See Figure 3	$f = 10$ Hz to 10 kHz	25°C	6		6			μV
		$f = 0.1$ Hz to 10 Hz		0.6		0.6			
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10$ kHz	25°C	2.8		2.8			fA/√Hz
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 20$ V, $A_{VD} = 10$, $f = 1$ kHz, $R_L = 2$ kΩ, $R_S = 25$ Ω	25°C	0.008%		0.008%			
B1	Unity-gain bandwidth	$V_I = 10$ mV, $R_L = 2$ kΩ, $C_L = 25$ pF, See Figure 2	25°C	8	10		8	10	MHz
BOM	Maximum output- swing bandwidth	$V_O(PP) = 20$ V, $A_{VD} = -1$, $R_L = 2$ kΩ, $C_L = 25$ pF	25°C	478	637		478	637	kHz
ϕ_m	Phase margin at unity gain	$V_I = 10$ mV, $R_L = 2$ kΩ, $C_L = 25$ pF, See Figure 2	25°C	57°		57°			

† Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081M			TLE2081AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage $V_{IC} = 0$, $R_S = 50\Omega$	25°C	0.34	6		0.3	3		mV
		Full range		11.2			8.2		
αV_{IO}	Temperature coefficient of input offset voltage	Full range		3.2	29*		3.2	29*	$\mu V^\circ C$
I_{IO}	Input offset current $V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	5	100		5	100		pA
		Full range		20			20		nA
I_{IB}		25°C	15	175		15	175		pA
		Full range		65			65		nA
V_{ICR}	Common-mode input voltage range $R_S = 50\Omega$	25°C	5 to -1	5 to -1.9		5 to -1	5 to -1.9		V
		Full range	5 to -0.8			5 to -0.8			
V_{OM+}	$I_O = -200\mu A$	25°C	3.8	4.1		3.8	4.1		V
		Full range	3.6			3.6			
	$I_O = -2\text{ mA}$	25°C	3.5	3.9		3.5	3.9		
		Full range	3.3			3.3			
	$I_O = -20\text{ mA}$	25°C	1.5	2.3		1.5	2.3		
		Full range	1.4			1.4			
	$I_O = 200\mu A$	25°C	-3.8	-4.2		-3.8	-4.2		dB
		Full range	-3.6			-3.6			
V_{OM-}	$I_O = 2\text{ mA}$	25°C	-3.5	-4.1		-3.5	-4.1		
		Full range	-3.3			-3.3			
	$I_O = 20\text{ mA}$	25°C	-1.5	-2.4		-1.5	-2.4		
		Full range	-1.4			-1.4			
	A_{VD}	$V_O = \pm 2.3\text{ V}$	25°C	80	91	80	91		
			Full range	78		78			
	A_{VD}	$R_L = 2\text{ k}\Omega$	25°C	90	100	90	100		
			Full range	88		88			
r_i	Large-signal differential voltage amplification	$R_L = 10\text{ k}\Omega$	25°C	95	106	95	106		dB
			Full range	93		93			
		$V_{IC} = 0$	25°C		10^{12}		10^{12}		
			Full range						
c_i	Input capacitance	$V_{IC} = 0$, See Figure 5	25°C Common mode		11		11		pF
			25°C Differential		2.5		2.5		
z_o	Open-loop output impedance	$f = 1\text{ MHz}$	25°C		80		80		Ω
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50\Omega$	25°C	70	89	70	89		dB
			Full range	68		68			
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}$, $V_O = 0$, $R_S = 50\Omega$	25°C	82	99	82	99		dB
			Full range	80		80			

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is $-55^\circ C$ to $125^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081M			TLE2081AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{CC} Supply current	$V_O = 0$, No load	25°C	1.35	1.6	2.2	1.35	1.6	2.2	mA
		Full range			2.2			2.2	
I_{OS} Short-circuit output current	$V_O = 0$	$V_{ID} = 1$ V $V_{ID} = -1$ V	25°C	-35		-35		mA	
				45		45			

† Full range is -55°C to 125°C.

TLE2081M operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081M			TLE2081AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR + Positive slew rate	$V_O(PP) = \pm 2.3$ V, $A_{VD} = -1$, $R_L = 2$ kΩ, $C_L = 100$ pF, See Figure 1	25°C	35			35			V/μs
		Full range	20*			20*			
SR - Negative slew rate		25°C	38			38			V/μs
		Full range	20*			20*			
t_s Settling time	$A_{VD} = -1$, 2-V step, $R_L = 1$ kΩ, $C_L = 100$ pF	To 10 mV	25°C	0.25		0.25			μs
		To 1 mV		0.4		0.4			
V_n Equivalent input noise voltage		$f = 10$ Hz	25°C	28		28			nV/√Hz
		$f = 10$ kHz		11.6		11.6			
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage	$R_S = 20$ Ω, See Figure 3	$f = 10$ Hz to 10 kHz	25°C	6		6			μV
		$f = 0.1$ Hz to 10 Hz		0.6		0.6			
I_n Equivalent input noise current	$V_{IC} = 0$,	$f = 10$ kHz	25°C	2.8		2.8			fA/√Hz
THD + N Total harmonic distortion plus noise	$V_O(PP) = 5$ V, $A_{VD} = 10$, $f = 1$ kHz, $R_L = 2$ kΩ, $R_S = 25$ Ω		25°C	0.013%		0.013%			
B_1 Unity-gain bandwidth	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C		9.4		9.4		MHz	
B_{OM} Maximum output-swing bandwidth	$V_O(PP) = 4$ V, $R_L = 2$ kΩ, $C_L = 25$ pF	25°C		2.8		2.8		MHz	
ϕ_m Phase margin at unity gain	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C		56°		56°			

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is -55°C to 125°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081M			TLE2081AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	0.49	6	11.2	0.47	3	8.2	mV
		Full range							
αV_{IO} Temperature coefficient of input offset voltage		Full range	3.2	29*		3.2	29*		$\mu V^\circ C$
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	6	100	20	6	100	20	pA
		Full range							
I_{IB} Input bias current		25°C	20	175	20	20	175	20	pA
		Full range							
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	15 to -11	15 to -11.9	15 to -11.9	15 to -11	15 to -11.9		V
		Full range	15 to -10.8		15 to -10.8	15 to -10.8			
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	13.8	14.1	13.8	14.1			V
		Full range	13.6		13.6				
	$I_O = -2 mA$	25°C	13.5	13.9	13.5	13.9			
		Full range	13.3		13.3				
	$I_O = -20 mA$	25°C	11.5	12.3	11.5	12.3			
		Full range	11.4		11.4				
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-13.8	-14.2	-13.8	-14.2			V
		Full range	-13.6		-13.6				
	$I_O = 2 mA$	25°C	-13.5	-14	-13.5	-14			
		Full range	-13.3		-13.3				
	$I_O = 20 mA$	25°C	-11.5	-12.4	-11.5	-12.4			
		Full range	-11.4		-11.4				
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 10 V$	$R_L = 600 \Omega$	25°C	80	96	80	96		dB
			Full range	78		78			
		$R_L = 2 k\Omega$	25°C	90	109	90	109		
			Full range	88		88			
		$R_L = 10 k\Omega$	25°C	95	118	95	118		
			Full range	93		93			
r_i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}		Ω	
c_i	Input capacitance	$V_{IC} = 0$, See Figure 5	Common mode	25°C	7.5		7.5		pF
			Differential	25°C	2.5		2.5		
z_o	Open-loop output impedance	$f = 1$ MHz	25°C	80		80		Ω	
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98	80	98		dB
			Full range	78		78			
kSVR	Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 V$ to $\pm 15 V$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB
			Full range	80		80			

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is $-55^\circ C$ to $125^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)(continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081M			TLE2081AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
			25°C	1.35	1.7	2.2	1.35	1.7	2.2
I_{CC}	Supply current No load	Full range			2.2			2.2	
		25°C	-30	-45		-30	-45		mA
I_{OS}	Short-circuit output current	$V_O = 0$	$V_{ID} = 1$ V			30	48	30	mA
			$V_{ID} = -1$ V						

[†] Full range is -55°C to 125°C.

TLE2081M operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2081M			TLE2081AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
			25°C	30	40	30	40		V/ μ s
SR+	Positive slew rate	$V_O(PP) = 10$ V, $A_{VD} = -1$, $C_L = 100$ pF, See Figure 1	Full range	22		22			
			25°C	30	45	30	45		V/ μ s
SR-	Negative slew rate	$R_S = 2$ k Ω , See Figure 1	Full range	22		22			
			25°C	0.4		0.4			μ s
t_s	Settling time	$A_{VD} = -1$, 10-V step, $R_L = 1$ k Ω , $C_L = 100$ pF	To 10 mV			1.5			μ s
			To 1 mV						
V_n	Equivalent input noise voltage	$f = 10$ Hz $f = 10$ kHz	25°C	28		28			nV/ $\sqrt{\text{Hz}}$
				11.6		11.6			
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	$R_S = 20$ Ω , See Figure 3	$f = 10$ Hz to 10 kHz	6		6			μ V
			$f = 0.1$ Hz to 10 Hz	0.6		0.6			
I_n	Equivalent input noise current	$V_{IC} = 0$,	$f = 10$ kHz	25°C	2.8		2.8		fA/ $\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 20$ V, $A_{VD} = 10$, $f = 1$ kHz, $R_L = 2$ k Ω , $R_S = 25$ Ω	25°C	0.008%		0.008%			
B_1	Unity-gain bandwidth	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C	8*	10		8*	10	MHz
B_{OM}	Maximum output-swing bandwidth	$V_O(PP) = 20$ V, $A_{VD} = -1$, $R_L = 2$ k Ω , $C_L = 25$ pF	25°C	478*	637		478*	637	kHz
ϕ_m	Phase margin at unity gain	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C	57°		57°			

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

[†] Full range is -55°C to 125°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2081Y electrical characteristics at $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLE2081Y			UNIT
		MIN	TYP	MAX	
V_{IO}	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	0.49	6		mV
I_{IO}	$V_{IC} = 0$, $V_O = 0$, See Figure 4	6	100		pA
		20	175		
V_{ICR}	$R_S = 50 \Omega$	15 to -11	15 to 11.9		V
V_{OM+}	$I_O = -200 \mu\text{A}$	13.8	14.1		V
	$I_O = -2 \text{ mA}$	13.5	13.9		
	$I_O = -20 \text{ mA}$	11.5	12.3		
V_{OM-}	$I_O = 200 \mu\text{A}$	-13.8	-14.2		V
	$I_O = 2 \text{ mA}$	-13.5	-14		
	$I_O = 20 \text{ mA}$	-11.5	-12.4		
A_{VD}	$V_O = \pm 10 \text{ V}$	$R_L = 600 \Omega$	80	96	dB
		$R_L = 2 \text{ k}\Omega$	90	109	
		$R_L = 10 \text{ k}\Omega$	95	118	
r_i	$V_{IC} = 0$		10 ¹²		Ω
c_i	$V_{IC} = 0$, See Figure 5	Common mode	7.5		pF
		Differential	2.5		
z_o	$f = 1 \text{ MHz}$		80		Ω
CMRR	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	80	98		dB
k_{SVR}	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$	82	99		dB
I_{CC}	$V_O = 0$, No load	1.35	1.7	2.2	mA
I_{OS}	$V_O = 0$	$V_{ID} = 1 \text{ V}$	-30	-45	mA
		$V_{ID} = -1 \text{ V}$	30	48	

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082C			TLE2082AC			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	0.9	6		0.65	4		mV	
		Full range		8.1			5.1			
αV_{IO} Temperature coefficient of input offset voltage		Full range	2.3	25		2.3	25		$\mu V/^\circ C$	
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	5	100		5	100		pA	
		Full range		1.4			1.4			
I_{IB} Input bias current		25°C	15	175		15	175		pA	
		Full range		5			5			
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	5	5		5	5		V	
		to	to			to	to			
			-1	-1.9		-1	-1.9			
		Full range	5			5				
			to			to				
			-0.9			-0.9				
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	3.8	4.1		3.8	4.1		V	
		Full range	3.7			3.7				
	$I_O = -2 mA$	25°C	3.5	3.9		3.5	3.9			
		Full range	3.4			3.4				
	$I_O = -20 mA$	25°C	1.5	2.3		1.5	2.3			
		Full range	1.5			1.5				
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-3.8	-4.2		-3.8	-4.2		V	
		Full range	-3.7			-3.7				
	$I_O = 2 mA$	25°C	-3.5	-4.1		-3.5	-4.1			
		Full range	-3.4			-3.4				
	$I_O = 20 mA$	25°C	-1.5	-2.4		-1.5	-2.4			
		Full range	-1.5			-1.5				
AVD Large-signal differential voltage amplification	$V_O = \pm 2.3 V$	$R_L = 600 \Omega$	25°C	80	91	80	91		dB	
			Full range	79		79				
		$R_L = 2 k\Omega$	25°C	90	100	90	100			
			Full range	89		89				
		$R_L = 10 k\Omega$	25°C	95	106	95	106			
			Full range	94		94				
r_i Input resistance	$V_{IC} = 0$	25°C	10^{12}			10^{12}			Ω	
c_i Input capacitance	Common mode	$V_{IC} = 0$, See Figure 5	25°C	11		11			pF	
			25°C	2.5		2.5				
z_o Open-loop output impedance	$f = 1 MHz$		25°C	80		80			Ω	
CMRR Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$		25°C	70	89	70	89		dB	
			Full range	68		68				
k_{SVR} Supply-voltage rejection ratio($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 V$ to $\pm 15 V$, $V_O = 0$, $R_S = 50 \Omega$		25°C	82	99	82	99		dB	
			Full range	80		80				
I_{CC} Supply current (both channels)	$V_O = 0$, No load		25°C	2.7	2.9	3.9	2.7	2.9	3.9	mA
			Full range		3.9			3.9		

[†] Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	TA	TLE2082C			TLE2082AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2 \text{ k}\Omega$	25°C	120			120			dB
I_{OS}	$V_O = 0$	25°C	–35			–35			mA
			45			45			

TLE2082C operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	TA†	TLE2082C			TLE2082AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate $V_O(PP) = \pm 2.3$ V, $A_{VD} = -1$, $C_L = 100 \text{ pF}$, $R_L = 2 \text{ k}\Omega$, See Figure 1	25°C	35			35			V/ μ s
		Full range	22			22			
		25°C	38			38			
		Full range	22			22			
t_S	Settling time $A_{VD} = -1$, 2-V step, $R_L = 1 \text{ k}\Omega$, $C_L = 100 \text{ pF}$	To 10 mV To 1 mV	25°C	0.25		0.25			μ s
				0.4		0.4			
V_n	Equivalent input noise voltage	$f = 10 \text{ Hz}$ $f = 10 \text{ kHz}$	25°C	28		28			nV/ $\sqrt{\text{Hz}}$
				11.6		11.6			
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage See Figure 3	$f = 10 \text{ Hz to } 10 \text{ kHz}$ $f = 0.1\text{Hz to } 10 \text{ Hz}$	25°C	6		6			μ V
				0.6		0.6			
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10 \text{ kHz}$	25°C	2.8		2.8			fA/ $\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 5$ V, $f = 1 \text{ kHz}$, $R_S = 25 \Omega$	25°C	0.013%		0.013%			
B_1	Unity-gain bandwidth	$V_I = 10 \text{ mV}$, $C_L = 25 \text{ pF}$, See Figure 2	25°C	9.4		9.4			MHz
B_{OM}	Maximum output-swing bandwidth	$V_O(PP) = 4$ V, $R_L = 2 \text{ k}\Omega$, $C_L = 25 \text{ pF}$	25°C	2.8		2.8			MHz
ϕ_m	Phase margin at unity gain	$V_I = 10 \text{ mV}$, $C_L = 25 \text{ pF}$, See Figure 2	25°C	56°		56°			

† Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082C			TLE2082AC			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	1.1	7	0.7	4			mV	
		Full range		8.1			5.1			
αV_{IO} Temperature coefficient of input offset voltage		Full range	2.4	25		2.4	25		$\mu V/^\circ C$	
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	6	100		6	100		pA	
		Full range		1.4			1.4			
I_{IB} Input bias current		25°C	20	175		20	175		pA	
		Full range		5			5			
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	15 to -11	15 to -11.9		15 to -11	15 to -11.9		V	
		Full range	15 to -10.9			15 to -10.9				
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	13.8	14.1		13.8	14.1		V	
		Full range	13.6			13.6				
	$I_O = -2 \text{ mA}$	25°C	13.5	13.9		13.5	13.9			
		Full range	13.4			13.4				
	$I_O = -20 \text{ mA}$	25°C	11.5	12.3		11.5	12.3			
		Full range	11.5			11.5				
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-13.8	-14.2		-13.8	-14.2		V	
		Full range	-13.7			-13.7				
	$I_O = 2 \text{ mA}$	25°C	-13.5	-14		-13.5	-14			
		Full range	-13.4			-13.4				
	$I_O = 20 \text{ mA}$	25°C	-11.5	-12.4		-11.5	-12.4			
		Full range	-11.5			-11.5				
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 10 \text{ V}$	$R_L = 600 \Omega$	25°C	80	96	80	96		dB	
			Full range	79		79				
		$R_L = 2 \text{ k}\Omega$	25°C	90	109	90	109			
			Full range	89		89				
		$R_L = 10 \text{ k}\Omega$	25°C	95	118	95	118			
			Full range	94		94				
r_i	Input resistance	$V_{IC} = 0$	25°C	10 ¹²		10 ¹²		Ω		
c_i Input capacitance	Common mode	$V_{IC} = 0$, See Figure 5	25°C	7.5		7.5			pF	
	Differential		25°C	2.5		2.5				
z_o	Open-loop output impedance	$f = 1 \text{ MHz}$	25°C	80		80		Ω		
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98	80	98		dB	
			Full range	79		79				
k _{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB	
			Full range	81		81				

[†] Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	TA	TLE2082C			TLE2082AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{CC}	$V_O = 0$, No load	25°C	2.7	3.1	3.9	2.7	3.1	3.9	mA
		Full range			3.9			3.9	
Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2$ kΩ	25°C		120			120		dB
I_{OS}	$V_O = 0$	25°C	-30	-45		-30	-45		mA
			30	48		30	48		

TLE2082C operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	TA†	TLE2082C			TLE2082AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate	$V_O(PP) = 10$ V, $A_{VD} = -1$, $R_L = 2$ kΩ, $C_L = 100$ pF, See Figure 1	25°C	28	40	28	40		V/μs
			Full range	25		25			
SR-	Negative slew rate		25°C	30	45	30	45		V/μs
			Full range	25		25			
t_s	Settling time	$A_{VD} = -1$, 10-V step, $R_L = 1$ kΩ, $C_L = 100$ pF	To 10 mV	25°C	0.4	0.4	0.4		μs
			To 1 mV		1.5		1.5		
V_n	Equivalent input noise voltage		$f = 10$ Hz	25°C	28	28	28		nV/√Hz
			$f = 10$ kHz		11.6		11.6		
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	$R_S = 20$ Ω, See Figure 3	$f = 10$ Hz to 10 kHz	25°C	6	6	6		μV
			$f = 0.1$ Hz to 10 Hz		0.6		0.6		
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10$ kHz	25°C		2.8		2.8		fA/√Hz
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 20$ V, $A_{VD} = 10$, $f = 1$ kHz, $R_L = 2$ kΩ, $R_S = 25$ Ω	25°C		0.008%		0.008%		
B_1	Unity-gain bandwidth	$V_I = 10$ mV, $R_L = 2$ kΩ, $C_L = 25$ pF, See Figure 2	25°C	8	10	8	10		MHz
B_{OM}	Maximum output-swing bandwidth	$V_O(PP) = 20$ V, $A_{VD} = -1$, $R_L = 2$ kΩ, $C_L = 25$ pF	25°C	478	637	478	637		kHz
ϕ_m	Phase margin at unity gain	$V_I = 10$ mV, $R_L = 2$ kΩ, $C_L = 25$ pF, See Figure 2	25°C		57°		57°		

† Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082I electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082I			TLE2082AI			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	0.9	7		0.65	4		mV	
		Full range		8.5			5.5			
αV_{IO} Temperature coefficient of input offset voltage		Full range	2.4	25		2.4	25		$\mu V/^\circ C$	
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	5	100		5	100		pA	
		Full range		5			5			
I_{IB} Input bias current		25°C	15	175		15	175		pA	
		Full range		10			10			
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	5	5		5	5		V	
		to	to			to	to			
			-1	-1.9		-1	-1.9			
		Full range	5			5				
			to			to				
			-0.8			-0.8				
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	3.8	4.1		3.8	4.1		V	
		Full range	3.7			3.7				
	$I_O = -2 mA$	25°C	3.5	3.9		3.5	3.9			
		Full range	3.4			3.4				
	$I_O = -20 mA$	25°C	1.5	2.3		1.5	2.3			
		Full range	1.5			1.5				
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-3.8	-4.2		-3.8	-4.2		V	
		Full range	-3.7			-3.7				
	$I_O = 2 mA$	25°C	-3.5	-4.1		-3.5	-4.1			
		Full range	-3.4			-3.4				
	$I_O = 20 mA$	25°C	-1.5	-2.4		-1.5	-2.4			
		Full range	-1.5			-1.5				
AVD Large-signal differential voltage amplification	$V_O = \pm 2.3 V$	$R_L = 600 \Omega$	25°C	80	91	80	91		dB	
			Full range	79		79				
		$R_L = 2 k\Omega$	25°C	90	100	90	100			
			Full range	89		89				
		$R_L = 10 k\Omega$	25°C	95	106	95	106			
			Full range	94		94				
r_i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}			Ω	
c_i Input capacitance	Common mode	$V_{IC} = 0$, See Figure 5	25°C	11		11			pF	
			25°C	2.5		2.5				
z_o	Open-loop output impedance	$f = 1$ MHz	25°C	80		80			Ω	
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	70	89	70	89		dB	
			Full range	68		68				
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5$ V to ± 15 V, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB	
			Full range	80		80				
I_{CC}	Supply current (both channels)	$V_O = 0$, No load	25°C	2.7	2.9	3.9	2.7	2.9	3.9	mA
			Full range		3.9			3.9		

[†] Full range is $-40^\circ C$ to $85^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**
SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082I electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	TA	TLE2082I			TLE2082AI			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2 \text{ k}\Omega$	25°C	120			120			dB
I_{OS}	$V_O = 0$	25°C	-35			-35			mA
			45			45			

TLE2082I operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	TA†	TLE2082I			TLE2082AI			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate $V_O(\text{PP}) = \pm 2.3$ V, $A_{VD} = -1$, $C_L = 100 \text{ pF}$, $R_L = 2 \text{ k}\Omega$, See Figure 1	25°C	35			35			V/ μ s
		Full range	20			20			
		25°C	38			38			
		Full range	20			20			
t_S	Settling time $A_{VD} = -1$, 2-V step, $R_L = 1 \text{ k}\Omega$, $C_L = 100 \text{ pF}$	To 10 mV	25°C	0.25		0.25			μ s
		To 1 mV		0.4		0.4			
V_n	Equivalent input noise voltage	$f = 10 \text{ Hz}$	25°C	28		28			nV/ $\sqrt{\text{Hz}}$
		$f = 10 \text{ kHz}$		11.6		11.6			
$V_{N(\text{PP})}$	Peak-to-peak equivalent input noise voltage $R_S = 20 \Omega$, See Figure 3	$f = 10 \text{ Hz}$ to 10 kHz	25°C	6		6			μ V
		$f = 0.1 \text{ Hz}$ to 10 Hz		0.6		0.6			
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10 \text{ kHz}$	25°C	2.8		2.8			fA/ $\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion plus noise	$V_O(\text{PP}) = 5$ V, $A_{VD} = 10$, $f = 1 \text{ kHz}$, $R_S = 25 \Omega$	25°C	0.013%		0.013%			
B_1	Unity-gain bandwidth	$V_I = 10 \text{ mV}$, $C_L = 25 \text{ pF}$, See Figure 2	25°C	9.4		9.4			MHz
B_{OM}	Maximum output-swing bandwidth	$V_O(\text{PP}) = 4$ V, $R_L = 2 \text{ k}\Omega$, $C_L = 25 \text{ pF}$	25°C	2.8		2.8			MHz
ϕ_m	Phase margin at unity gain	$V_I = 10 \text{ mV}$, $C_L = 25 \text{ pF}$, See Figure 2	25°C	56°		56°			

† Full range is 40°C to 85°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082I electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082I			TLE2082AI			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	1.1	7		0.7	4		mV	
		Full range		8.5			5.5			
αV_{IO} Temperature coefficient of input offset voltage		Full range	2.4	25		2.4	25		$\mu V/^\circ C$	
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	6	100		6	100		pA	
		Full range		5			5		nA	
I_{IB} Input bias current		25°C	20	175		20	175		pA	
		Full range		10			10		nA	
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	15	15		15	15		V	
			to	to		to	to			
			-11	-11.9		-11	-11.9			
		Full range	15			15				
			to			to				
			-10.8			-10.8				
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	13.8	14.1		13.8	14.1		V	
		Full range	13.7			13.7				
	$I_O = -2 mA$	25°C	13.5	13.9		13.5	13.9			
		Full range	13.4			13.4				
	$I_O = -20 mA$	25°C	11.5	12.3		11.5	12.3			
		Full range	11.5			11.5				
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-13.8	-14.2		-13.8	-14.2		V	
		Full range	-13.7			-13.7				
	$I_O = 2 mA$	25°C	-13.5	-14		-13.5	-14			
		Full range	-13.4			-13.4				
	$I_O = 20 mA$	25°C	-11.5	-12.4		-11.5	-12.4			
		Full range	-11.5			-11.5				
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 10 V$	$R_L = 600 \Omega$	25°C	80	96	80	96		dB	
			Full range	79		79				
		$R_L = 2 k\Omega$	25°C	90	109	90	109			
			Full range	89		89				
		$R_L = 10 k\Omega$	25°C	95	118	95	118			
			Full range	94		94				
r_i	Input resistance	$V_{IC} = 0$	25°C	10 ¹²		10 ¹²		Ω		
c_i Input capacitance	Common mode	$V_{IC} = 0$, See Figure 5	25°C	7.5		7.5		pF		
	Differential		25°C	2.5		2.5				
z_o	Open-loop output impedance	$f = 1$ MHz	25°C	80		80		Ω		
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98	80	98	dB		
			Full range	79		79				
k _{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 V$ to $\pm 15 V$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99	dB		
			Full range	80		80				

[†] Full range is -40°C to 85°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082I electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	TA	TLE2082I			TLE2082AI			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{CC}	$V_O = 0$, No load	25°C	2.7	3.1	3.9	2.7	3.1	3.9	mA
		Full range			3.9			3.9	
Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2$ kΩ	25°C		120			120		dB
I_{OS}	$V_O = 0$	25°C	-30	-45		-30	-45		mA
			30	48		30	48		

TLE2082I operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	TA	TLE2082I			TLE2082AI			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate	25°C Full range 25°C Full range	28	40		28	40		V/μs
			22			22			
SR-	Negative slew rate	25°C Full range	30	45		30	45		V/μs
			22			22			
t_s	Settling time	AVD = -1, 10-V step, $R_L = 1$ kΩ, $C_L = 100$ pF	To 10 mV	25°C	0.4	25°C	0.4		μs
			To 1 mV		1.5		1.5		
V_n	Equivalent input noise voltage	$f = 10$ Hz $f = 10$ kHz	25°C	28	28	25°C	28	28	nV/√Hz
				11.6	11.6		11.6	11.6	
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	RS = 20 Ω, See Figure 3	$f = 10$ Hz to 10 kHz	25°C	6	25°C	6	6	μV
			$f = 0.1$ Hz to 10 Hz		0.6		0.6	0.6	
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10$ kHz	25°C		2.8		2.8		fA/√Hz
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 20$ V, $A_{VD} = 10$, $f = 1$ kHz, $R_L = 2$ kΩ, $RS = 25$ Ω	25°C		0.008%		0.008%		
B ₁	Unity-gain bandwidth	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C	8	10	25°C	8	10	MHz
B _{OM}	Maximum output-swing bandwidth	$V_O(PP) = 20$ V, $A_{VD} = -1$, $R_L = 2$ kΩ, $C_L = 25$ pF	25°C	478	637	25°C	478	637	kHz
φ _m	Phase margin at unity gain	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C		57°		57°		

† Full range is -40°C to 85°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082M			TLE2082AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50\Omega$	25°C	0.9	7		0.65	4		mV
		Full range		9.5			6.5		
αV_{IO} Temperature coefficient of input offset voltage		Full range	2.3	25*		2.3	25*		$\mu V/^\circ C$
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	5	100		5	100		pA
		Full range		20			20		
I_{IB} Input bias current		25°C	15	175		15	175		pA
		Full range		60			60		
V_{ICR} Common-mode input voltage range	$R_S = 50\Omega$	25°C	5	5		5	5		V
			to	to		to	to		
			-1	-1.9		-1	-1.9		
		Full range	5			5			
			to			to			
			-0.8			-0.8			
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200\mu A$	25°C	3.8	4.1		3.8	4.1		V
		Full range	3.6			3.6			
	$I_O = -2\text{ mA}$	25°C	3.5	3.9		3.5	3.9		
		Full range	3.3			3.3			
	$I_O = -20\text{ mA}$	25°C	1.5	2.3		1.5	2.3		
		Full range	1.4			1.4			
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200\mu A$	25°C	-3.8	-4.2		-3.8	-4.2		V
		Full range	-3.6			-3.6			
	$I_O = 2\text{ mA}$	25°C	-3.5	-4.1		-3.5	-4.1		
		Full range	-3.3			-3.3			
	$I_O = 20\text{ mA}$	25°C	-1.5	-2.4		-1.5	-2.4		
		Full range	-1.4			-1.4			
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 2.3\text{ V}$	$R_L = 600\Omega$	25°C	80	91	80	91		dB
			Full range	78		78			
		$R_L = 2\text{ k}\Omega$	25°C	90	100	90	100		
			Full range	88		88			
		$R_L = 10\text{ k}\Omega$	25°C	95	106	95	106		
			Full range	93		93			
r_i	Input resistance	$V_{IC} = 0$	25°C		10^{12}		10^{12}		Ω
c_i Input capaci- tance	Common mode	$V_{IC} = 0$, See Figure 5	25°C		11		11		pF
			25°C		2.5		2.5		
z_o	Open-loop output impedance	$f = 1\text{ MHz}$	25°C		80		80		Ω
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50\Omega$	25°C	70	89	70	89	dB	
			Full range	68		68			
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}$, $V_O = 0$, $R_S = 50\Omega$	25°C	82	99	82	99	dB	
			Full range	80		80			

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is $-55^\circ C$ to $125^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082M			TLE2082AM			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
I_{CC}	$V_O = 0$, Supply current (both channels)	No load	25°C	2.7	2.9	3.6	2.7	2.9	3.6	mA
			Full range			3.6			3.6	
Crosstalk attenuation	$V_{IC} = 0$,	$R_L = 2\text{ k}\Omega$	25°C		120		120		dB	
I_{OS}	$V_O = 0$	$V_{ID} = 1\text{ V}$	25°C		-35		-35		mA	
		$V_{ID} = -1\text{ V}$			45		45			

† Full range is -55°C to 125°C.

TLE2082M operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082M			TLE2082AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate	$V_O(\text{PP}) = \pm 2.3\text{ V}$, $\text{AVD} = -1$, $C_L = 100\text{ pF}$, See Figure 1	25°C		35		35		$\text{V}/\mu\text{s}$
			Full range		18*		18*		
SR-	Negative slew rate	$R_L = 2\text{ k}\Omega$, See Figure 1	25°C		38		38		$\text{V}/\mu\text{s}$
			Full range		18*		18*		
t_s	Settling time	$\text{AVD} = -1$, 2-V step, $R_L = 1\text{ k}\Omega$, $C_L = 100\text{ pF}$	To 10 mV	25°C		0.25		0.25	μs
			To 1 mV			0.4		0.4	
V_n	Equivalent input noise voltage	$R_S = 20\text{ }\Omega$, See Figure 3	$f = 10\text{ Hz}$	25°C		28		28	$\text{nV}/\sqrt{\text{Hz}}$
			$f = 10\text{ kHz}$			11.6		11.6	
$V_{N(\text{PP})}$	Peak-to-peak equivalent input noise voltage	$f = 10\text{ Hz to } 10\text{ kHz}$	25°C			6		6	μV
			$f = 0.1\text{ Hz to } 10\text{ Hz}$		0.6		0.6		
I_n	Equivalent input noise current	$V_{IC} = 0$,	$f = 10\text{ kHz}$	25°C		2.8		2.8	$\text{fA}/\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion plus noise	$V_O(\text{PP}) = 5\text{ V}$, $\text{AVD} = 10$, $f = 1\text{ kHz}$, $R_S = 25\text{ }\Omega$	$R_L = 2\text{ k}\Omega$, See Figure 2	25°C		0.013%		0.013%	
B ₁	Unity-gain bandwidth	$V_I = 10\text{ mV}$, $C_L = 25\text{ pF}$, See Figure 2	$R_L = 2\text{ k}\Omega$, See Figure 2	25°C		9.4		9.4	MHz
B _{OM}	Maximum output-swing bandwidth	$V_O(\text{PP}) = 4\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 25\text{ pF}$		25°C		2.8		2.8	MHz
ϕ_m	Phase margin at unity gain	$V_I = 10\text{ mV}$, $C_L = 25\text{ pF}$, See Figure 2	$R_L = 2\text{ k}\Omega$, See Figure 2	25°C		56°		56°	

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is -55°C to 125°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082M			TLE2082AM			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	1.1	7	1.1	0.7	4	6.5	mV	
		Full range		9.5				2.4		
αV_{IO} Temperature coefficient of input offset voltage		Full range	2.4	25*	2.4	25*	2.4	25*	$\mu V/^\circ C$	
		25°C	6	100	6	100	6	100		
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	Full range		20				20	nA	
		25°C	20	175	20	175	20	175		
I_{IB} Input bias current		Full range		65				65	nA	
		25°C	15	15	15	15	15	15		
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	to	to		to	to			V	
		-11	-11.9		-11	-11.9				
		Full range	15		15		15		V	
			to		to		to			
			-10.8		-10.8		-10.8			
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	13.8	14.1	13.8	14.1			V	
		Full range	13.6		13.6		13.6			
	$I_O = -2 mA$	25°C	13.5	13.9	13.5	13.9				
		Full range	13.3		13.3		13.3			
	$I_O = -20 mA$	25°C	11.5	12.3	11.5	12.3				
		Full range	11.4		11.4		11.4			
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-13.8	-14.2	-13.8	-14.2			V	
		Full range	-13.6		-13.6		-13.6			
	$I_O = 2 mA$	25°C	-13.5	-14	-13.5	-14				
		Full range	-13.3		-13.3		-13.3			
	$I_O = 20 mA$	25°C	-11.5	-12.4	-11.5	-12.4				
		Full range	-11.4		-11.4		-11.4			
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 10 V$	$R_L = 600 \Omega$	25°C	80	96	80	96		dB	
			Full range	78		78				
		$R_L = 2 k\Omega$	25°C	90	109	90	109			
			Full range	88		88				
		$R_L = 10 k\Omega$	25°C	95	118	95	118			
			Full range	93		93				
r_i	Input resistance	$V_{IC} = 0$	25°C		10 ¹²		10 ¹²		Ω	
c_i Input capacitance	Common mode	$V_{IC} = 0$, See Figure 5	25°C		7.5		7.5		pF	
	Differential		25°C		2.5		2.5			
z_o	Open-loop output impedance	$f = 1$ MHz	25°C		80		80		Ω	
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98	80	98		dB	
			Full range	78		78				
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5 V$ to $\pm 15 V$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB	
			Full range	80		80				

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is $-55^\circ C$ to $125^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)
(continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082M			TLE2082AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{CC}	Supply current (both channels) $V_O = 0$, No load	25°C	2.7	3.1	3.6	2.7	3.1	3.6	mA
		Full range			3.6			3.6	
Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2\text{ k}\Omega$	25°C		120			120		dB
I_{OS}	Short-circuit output current $V_O = 0$	$V_{ID} = 1\text{ V}$ $V_{ID} = -1\text{ V}$	25°C	-30	-45	-30	-45		mA
				30	48	30	48		

† Full range is -55°C to 125°C .

TLE2082M operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2082M			TLE2082AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate $V_O(\text{PP}) = 10\text{ V}$, $A_{VD} = -1$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1	25°C	28	40		28	40		$\text{V}/\mu\text{s}$
		Full range	20			20			
SR-	Negative slew rate See Figure 1	25°C	30	45		30	45		$\text{V}/\mu\text{s}$
		Full range	20			20			
t_s	Settling time $A_{VD} = -1$, 10-V step, $R_L = 1\text{ k}\Omega$, $C_L = 100\text{ pF}$	To 10 mV To 1 mV	25°C		0.4		0.4		μs
					1.5		1.5		
V_n	Equivalent input noise voltage	$f = 10\text{ Hz}$ $f = 10\text{ kHz}$	25°C		28		28		$\text{nV}/\sqrt{\text{Hz}}$
					11.6		11.6		
$V_{N(\text{PP})}$	Peak-to-peak equivalent input noise voltage See Figure 3	$f = 10\text{ Hz to}$ 10 kHz $f = 0.1\text{ Hz to}$ 10 Hz	25°C		6		6		μV
					0.6		0.6		
I_n	Equivalent input noise current	$V_{IC} = 0$, $f = 10\text{ kHz}$	25°C		2.8		2.8		$\text{fA}/\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion plus noise	$V_O(\text{PP}) = 20\text{ V}$, $A_{VD} = 10$, $f = 1\text{ kHz}$, $R_L = 2\text{ k}\Omega$, $R_S = 25\text{ }\Omega$	25°C		0.008%		0.008%		
B ₁	Unity-gain bandwidth	$V_I = 10\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 25\text{ pF}$, See Figure 2	25°C	8*	10		8*	10	MHz
B _{OM}	Maximum output-swing bandwidth	$V_O(\text{PP}) = 20\text{ V}$, $A_{VD} = -1$, $R_L = 2\text{ k}\Omega$, $C_L = 25\text{ pF}$	25°C	478*	637		478*	637	kHz
ϕ_m	Phase margin at unity gain	$V_I = 10\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 25\text{ pF}$, See Figure 2	25°C		57°			57°	

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is -55°C to 125°C .

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2082Y electrical characteristics at $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLE2082Y			UNIT
		MIN	TYP	MAX	
V_{IO}	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	1.1	6		mV
I_{IO}	$V_{IC} = 0$, $V_O = 0$, See Figure 4	6	100		pA
I_{IB}		20	175		pA
V_{ICR}	$R_S = 50 \Omega$	15 to -11	15 to 11.9		V
V_{OM+}	$I_O = -200 \mu\text{A}$	13.8	14.1		V
	$I_O = -2 \text{ mA}$	13.5	13.9		
	$I_O = -20 \text{ mA}$	11.5	12.3		
V_{OM-}	$I_O = 200 \mu\text{A}$	-13.8	-14.2		V
	$I_O = 2 \text{ mA}$	-13.5	-14		
	$I_O = 20 \text{ mA}$	-11.5	-12.4		
A_{VD}	$V_O = \pm 10 \text{ V}$	$R_L = 600 \Omega$	80	96	dB
		$R_L = 2 \text{ k}\Omega$	90	109	
		$R_L = 10 \text{ k}\Omega$	95	118	
r_i	$V_{IC} = 0$		10 ¹²		Ω
c_i	Common mode	$V_O = 0$, See Figure 5			pF
	Differential			2.5	
z_o	$f = 1 \text{ MHz}$		80		Ω
$CMRR$	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	80	98		dB
k_{SVR}	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$	82	99		dB
I_{CC}	$V_O = 0$, No load	2.7	3.1	3.9	mA
I_{OS}	$V_O = 0$	$V_{ID} = 1 \text{ V}$	-30	-45	mA
		$V_{ID} = -1 \text{ V}$	30	48	

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084C			TLE2084AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	-1.6	7		-0.5	4		mV
		Full range		9.1			6.1		
α_{VIO} Temperature coefficient of input offset voltage		Full range		10.1	30		10.1	30	$\mu\text{V}/^\circ\text{C}$
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	15	100		15	100		pA
		Full range		1.4			1.4		
I_{IB} Input bias current		25°C	20	175		20	175		pA
		Full range		5			5		
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	5 to -1	5 to -1.9		5 to -1	5 to -1.9		V
		Full range	5 to -0.9			5 to -0.9			
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu\text{A}$	25°C	3.8	4.1		3.8	4.1		V
		Full range	3.7			3.7			
	$I_O = -2 \text{ mA}$	25°C	3.5	3.9		3.5	3.9		
		Full range	3.4			3.4			
	$I_O = -20 \text{ mA}$	25°C	1.5	2.3		1.5	2.3		
		Full range	1.5			1.5			
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu\text{A}$	25°C	-3.8	-4.2		-3.8	-4.2		V
		Full range	-3.7			-3.7			
	$I_O = 2 \text{ mA}$	25°C	-3.5	-4.1		-3.5	-4.1		
		Full range	-3.4			-3.4			
	$I_O = 20 \text{ mA}$	25°C	-1.5	-2.4		-1.5	-2.4		
		Full range	-1.5			-1.5			
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 2.3 \text{ V}$	$R_L = 600 \Omega$	25°C	80	91	80	91		dB
			Full range	79		79			
		$R_L = 2 \text{ k}\Omega$	25°C	90	100	90	100		
			Full range	89		89			
		$R_L = 10 \text{ k}\Omega$	25°C	95	106	95	106		
			Full range	94		94			
r_i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}		Ω	
c_i Input capacitance	$V_{IC} = 0$, See Figure 5	Common mode	25°C	11		11			pF
		Differential	25°C	2.5		2.5			
z_o	Open-loop output impedance	$f = 1 \text{ MHz}$	25°C	80		80		Ω	
$CMRR$ Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	70	89		70	89		dB
		Full range	68			68			
k_{SVR} Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99		82	99		dB
		Full range	80			80			
I_{CC} Supply current (four amplifiers)	$V_O = 0$, No load	25°C	5.2	6.3	7.5	5.2	6.3	7.5	mA
		Full range		7.5			7.5		
a_x	Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2 \text{ k}\Omega$	25°C	120		120		dB	

[†] Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084C			TLE2084AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{OS} Short-circuit output current	$V_O = 0$	25°C	–35			–35			mA
			45			45			

[†]Full range is 0°C to 70°C.

TLE2084C operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084C			TLE2084AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR + Positive slew rate	$V_{O(PP)} = \pm 2.3$ V, $A_{VD} = -1$, $C_L = 100$ pF, See Figure 1	25°C	35			35			V/ μ s
		Full range	22			22			
SR – Negative slew rate		25°C	38			38			V/ μ s
		Full range	22			22			
t_s Settling time	$A_{VD} = -1$, 2-V step, $R_L = 1$ k Ω , $C_L = 100$ pF	To 10 mV	25°C	0.25		0.25			μ s
		To 1 mV		0.4		0.4			
V_n Equivalent input noise voltage		$f = 10$ Hz	25°C	28		28			nV/ $\sqrt{\text{Hz}}$
		$f = 10$ kHz		11.6		11.6			
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage	$R_S = 20$ Ω , See Figure 3	$f = 10$ Hz to 10 kHz	25°C	6		6			μ V
		$f = 0.1$ Hz to 10 Hz		0.6		0.6			
I_n Equivalent input noise current	$V_{IC} = 0$,	$f = 10$ kHz	25°C	2.8		2.8			fA/ $\sqrt{\text{Hz}}$
THD + N Total harmonic distortion plus noise	$V_{O(PP)} = 5$ V, $f = 1$ kHz, $R_S = 25$ Ω	$A_{VD} = 10$, $R_L = 2$ k Ω ,	25°C	0.013%		0.013%			
B ₁ Unity-gain bandwidth	$V_I = 10$ mV, $C_L = 25$ pF,	$R_L = 2$ k Ω , See Figure 2	25°C	9.4		9.4			MHz
B _{OM} Maximum output-swing bandwidth	$V_{O(PP)} = 4$ V, $R_L = 2$ k Ω ,	$A_{VD} = -1$, $C_L = 25$ pF	25°C	2.8		2.8			MHz
ϕ_m Phase margin at unity gain	$V_I = 10$ mV, $C_L = 25$ pF,	$R_L = 2$ k Ω , See Figure 2	25°C	56°		56°			

[†]Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084C			TLE2084AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	-1.6	7		-0.5	4		mV
		Full range		9.1			6.1		
		Full range	10.1	30		10.1	30		
αV_{IO} Temperature coefficient of input offset voltage									$\mu V/^\circ C$
I_{IO} Input offset current	$V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	15	100		15	100		pA
		Full range		1.4			1.4		nA
		25°C	25	175		25	175		pA
I_{IB} Input bias current		Full range		5			5		nA
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$	25°C	15 to -11	15 to -11.9		15 to -11	15 to -11.9		V
		Full range	15 to -10.9			15 to -10.9			
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu A$	25°C	13.8	14.1		13.8	14.1		V
		Full range	13.7			13.7			
	$I_O = -2 mA$	25°C	13.5	13.9		13.5	13.9		
		Full range	13.4			13.4			
	$I_O = -20 mA$	25°C	11.5	12.3		11.5	12.3		
		Full range	11.5			11.5			
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu A$	25°C	-13.8	-14.2		-13.8	-14.2		V
		Full range	-13.7			-13.7			
	$I_O = 2 mA$	25°C	-13.7	-14		-13.7	-14		
		Full range	-13.6			-13.6			
	$I_O = 20 mA$	25°C	-11.5	-12.4		-11.5	-12.4		
		Full range	-11.5			-11.5			
A_{VD} Large-signal differential voltage amplification	$R_L = 600 \Omega$ $V_O = \pm 10 V$	25°C	80	96		80	96		dB
		Full range	79			79			
		25°C	90	109		90	109		
	$R_L = 2 k\Omega$ $R_L = 10 k\Omega$	Full range	89			89			
		25°C	95	118		95	118		
		Full range	94			94			
r_i Input resistance	$V_{IC} = 0$	25°C	1012			1012			Ω
c_i Input capacitance	$V_{IC} = 0$, See Figure 5	25°C Common mode	7.5			7.5			pF
		25°C Differential	2.5			2.5			
z_o Open-loop output impedance	$f = 1$ MHz	25°C	80			80			Ω
$CMRR$ Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98		80	98		dB
		Full range	79			79			
k_{SVR} Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5$ V to ± 15 V, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99		82	99		dB
		Full range	81			81			
I_{CC} Supply current (four amplifiers)	$V_O = 0$, No load	25°C	5.2	6.5	7.5	5.2	6.5	7.5	mA
		Full range		7.5			7.5		
a_x Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2 k\Omega$	25°C	120			120			dB

[†] Full range is 0°C to 70°C.

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084C electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084C			TLE2084AC			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I_{OS} Short-circuit output current	$V_O = 0$	25°C	-30	-45		-30	-45		mA
			30	48		30	48		

[†] Full range is 0°C to 70°C.

TLE2084C operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084C			TLE2084AC			UNIT	
			MIN	TYP	MAX	MIN	TYP	MAX		
SR+ Positive slew rate	$V_{O(PP)} = 10$ V, $A_{VD} = -1$, $R_L = 2\text{k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1	25°C	25	40		25	40		V/ μ s	
		Full range	22			22				
SR- Negative slew rate		25°C	30	45		30	45		V/ μ s	
		Full range	25			25				
t_s Settling time	$A_{VD} = -1$, 10-V step, $R_L = 1\text{k}\Omega$, $C_L = 100\text{ pF}$	To 10 mV	25°C	0.4		0.4			μ s	
		To 1 mV		1.5		1.5				
V_n Equivalent input noise voltage	$R_S = 20\Omega$, See Figure 3	f = 10 Hz	25°C	28		28			nV/ $\sqrt{\text{Hz}}$	
		f = 10 kHz		11.6		11.6				
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage		f = 10 Hz to 10 kHz	25°C	6		6			μ V	
		f = 0.1 Hz to 10 Hz		0.6		0.6				
I_n Equivalent input noise current	$V_{IC} = 0$, $f = 10\text{ kHz}$	25°C	2.8		2.8				fA/ $\sqrt{\text{Hz}}$	
THD + N Total harmonic distortion plus noise	$V_{O(PP)} = 20$ V, $A_{VD} = 10$, $f = 1\text{ kHz}$, $R_L = 2\text{k}\Omega$, $R_S = 25\Omega$	25°C	0.008%		0.008%					
B_1 Unity-gain bandwidth	$V_I = 10\text{ mV}$, $R_L = 2\text{k}\Omega$, $C_L = 25\text{ pF}$, See Figure 2	25°C	8 10		8 10				MHz	
B_{OM} Maximum output-swing bandwidth	$V_{O(PP)} = 20$ V, $A_{VD} = -1$, $R_L = 2\text{k}\Omega$, $C_L = 25\text{ pF}$	25°C	478 637		478 637				kHz	
ϕ_m Phase margin at unity gain	$V_I = 10\text{ mV}$, $R_L = 2\text{k}\Omega$, $C_L = 25\text{ pF}$, See Figure 2	25°C	57°		57°					

[†] Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084M			TLE2084AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage $V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	-1.6	7		-0.5	4		mV
		Full range		12.5			9.5		
α_{VIO}	Temperature coefficient of input offset voltage	Full range	10.1	30*		10.1	30*		$\mu V/^\circ C$
I_{IO}	Input offset current $V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	15	100		15	100		pA
		Full range		20			20		
I_{IB}	Input bias current	25°C	20	175		20	175		pA
		Full range		65			65		
V_{ICR}	Common-mode input voltage range $R_S = 50 \Omega$	25°C	5 to -1	5 to -1.9		5 to -1	5 to -1.9		V
		Full range	5 to -0.8			5 to -0.8			
V_{OM+}	$I_O = -200 \mu A$	25°C	3.8	4.1		3.8	4.1		V
		Full range	3.6			3.6			
	$I_O = -2 \text{ mA}$	25°C	3.5	3.9		3.5	3.9		
		Full range	3.3			3.3			
	$I_O = -20 \text{ mA}$	25°C	1.5	2.3		1.5	2.3		
		Full range	1.4			1.4			
V_{OM-}	$I_O = 200 \mu A$	25°C	-3.8	-4.2		-3.8	-4.2		V
		Full range	-3.6			-3.6			
	$I_O = 2 \text{ mA}$	25°C	-3.5	-4.1		-3.5	-4.1		
		Full range	-3.3			-3.3			
	$I_O = 20 \text{ mA}$	25°C	-1.5	-2.4		-1.5	-2.4		
		Full range	-1.4			-1.4			
A_{VD}	Large-signal differential voltage amplification $V_O = \pm 2.3 \text{ V}$	$R_L = 600 \Omega$	25°C	80	91	80	91		dB
			Full range	78		78			
		$R_L = 2 \text{ k}\Omega$	25°C	90	100	90	100		
			Full range	88		88			
		$R_L = 10 \text{ k}\Omega$	25°C	95	106	95	106		
			Full range	93		93			
r_i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}		Ω	
c_i	Input capacitance	$V_{IC} = 0$, See Figure 5	25°C Common mode	11		11			pF
			25°C Differential	2.5		2.5			
z_o	Open-loop output impedance	$f = 1 \text{ MHz}$	25°C	80		80		Ω	
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	70	89	70	89		dB
			Full range	68		68			
k_{SVR}	Supply-voltage rejec- tion ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB
			Full range	80		80			
I_{CC}	Supply current (four amplifiers)	$V_O = 0$, No load	25°C	5.2	6.3	7.5	5.2	6.3	mA
			Full range		7.5			7.5	
a_x	Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2 \text{ k}\Omega$	25°C	120		120			dB

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is $-55^\circ C$ to $125^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A	TLE2084M			TLE2084AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I _{OS}	Short-circuit output current $V_O = 0$	25°C	–35			–35			mA
				45			45		

TLE2084M operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 5$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084M			TLE2084AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate	$V_O(PP) = \pm 2.3$ V, $A_{VD} = -1$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1	25°C		35		35		V/ μ s
			Full range	18*		18*			
SR–	Negative slew rate		25°C		38		38		V/ μ s
			Full range	18*		18*			
t _s	Settling time	$A_{VD} = -1$, 2-V step, $R_L = 1\text{ k}\Omega$, $C_L = 100\text{ pF}$	To 10 mV	25°C	0.25		0.25		μ s
			To 1 mV		0.4		0.4		
V _n	Equivalent input noise voltage		f = 10 Hz	25°C	28		28		nV/ $\sqrt{\text{Hz}}$
			f = 10 kHz		11.6		11.6		
V _{N(PP)}	Peak-to-peak equivalent input noise voltage	R _S = 20 Ω , See Figure 3	f = 10 Hz to 10 kHz	25°C	6		6		μ V
			f = 0.1 Hz to 10 Hz		0.6		0.6		
I _n	Equivalent input noise current	V _{IC} = 0, f = 10 kHz		25°C	2.8		2.8		fA/ $\sqrt{\text{Hz}}$
THD + N	Total harmonic distortion plus noise	V _{O(PP)} = 5 V, f = 1 kHz, R _S = 25 Ω	A _{VD} = 10, R _L = 2 k Ω ,	25°C	0.013%		0.013%		
B ₁	Unity-gain bandwidth	V _I = 10 mV, C _L = 25 pF, See Figure 2	R _L = 2 k Ω ,	25°C	9.4		9.4		MHz
B _{OM}	Maximum output-swing bandwidth	V _{O(PP)} = 4 V, R _L = 2 k Ω ,	A _{VD} = –1, C _L = 25 pF	25°C	2.8		2.8		MHz
ϕ_m	Phase margin at unity gain	V _I = 10 mV, C _L = 25 pF, See Figure 2	R _L = 2 k Ω ,	25°C	56°		56°		

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is –55°C to 125°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084M			TLE2084AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage $V_{IC} = 0$, $V_O = 0$, $R_S = 50 \Omega$	25°C	-1.6	7		-0.5	4		mV
		Full range		12.5				7.5	
α_{VIO}	Temperature coefficient of input offset voltage	Full range	10.1	30*		10.1	30*		$\mu V/^\circ C$
I_{IO}	Input offset current $V_{IC} = 0$, $V_O = 0$, See Figure 4	25°C	15	100		15	100		pA
		Full range		20				20	
I_{IB}	Input bias current	25°C	25	175		25	175		pA
		Full range		65				65	
V_{ICR}	Common-mode input voltage range $R_S = 50 \Omega$	25°C	15 to -11	15 to -11.9		15 to -11	15 to -11.9		V
		Full range	15 to -10.8			15 to -10.8			
V_{OM+}	$I_O = -200 \mu A$	25°C	13.8	14.1		13.8	14.1		V
		Full range	13.6			13.6			
	$I_O = -2 mA$	25°C	13.5	13.9		13.5	13.9		
		Full range	13.3			13.3			
	$I_O = -20 mA$	25°C	11.5	12.3		11.5	12.3		
		Full range	11.4			11.4			
V_{OM-}	$I_O = 200 \mu A$	25°C	-13.8	-14.2		-13.8	-14.2		V
		Full range	-13.6			-13.6			
	$I_O = 2 mA$	25°C	-13.5	-14		-13.5	-14		
		Full range	-13.3			-13.3			
	$I_O = 20 mA$	25°C	-11.5	-12.4		-11.5	-12.4		
		Full range	-11.4			-11.4			
A_{VD}	Large-signal differential voltage amplification $V_O = \pm 10 V$	$R_L = 600 \Omega$	25°C	80	96	80	96		dB
			Full range	78		78			
		$R_L = 2 k\Omega$	25°C	90	109	90	109		
			Full range	88		88			
		$R_L = 10 k\Omega$	25°C	95	118	95	118		
			Full range	93		93			
r_i	Input resistance	$V_{IC} = 0$	25°C	10^{12}		10^{12}			Ω
c_i	Input capacitance	$V_{IC} = 0$, See Figure 5	25°C Common mode	7.5		7.5			pF
			25°C Differential	2.5		2.5			
z_o	Open-loop output impedance	$f = 1 MHz$	25°C	80		80			Ω
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $V_O = 0$, $R_S = 50 \Omega$	25°C	80	98	80	98		dB
			Full range	78		78			
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5 V$ to $\pm 15 V$, $V_O = 0$, $R_S = 50 \Omega$	25°C	82	99	82	99		dB
			Full range	80		80			
I_{CC}	Supply current (four amplifiers)	$V_O = 0$, No load	25°C	5.2	6.5	7.5	5.2	6.5	mA
			Full range		7.5			7.5	
a_x	Crosstalk attenuation	$V_{IC} = 0$, $R_L = 2 k\Omega$	25°C	120		120			dB

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is $-55^\circ C$ to $125^\circ C$.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TLE2084M electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted) (continued)

PARAMETER	TEST CONDITIONS	T_A	TLE2084M			TLE2084AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
I _{OS}	Short-circuit output current	$V_O = 0$	$V_{ID} = 1$ V	25°C	-30	-45	-30	-45	mA
			$V_{ID} = -1$ V		30	48	30	48	

TLE2084M operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

PARAMETER	TEST CONDITIONS	T_A^\dagger	TLE2084M			TLE2084AM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
SR +	Positive slew rate	$V_O(PP) = 10$ V, $A_{VD} = -1$, $C_L = 100$ pF, See Figure 1	25°C	25	40	25	40	V/ μ s	
			Full range	17		17			
SR -	Negative slew rate		25°C	30	45	30	45	V/ μ s	
			Full range	20		20			
t _s	Settling time	$A_{VD} = -1$, 10-V step, $R_L = 1\text{k}\Omega$, $C_L = 100$ pF	To 10 mV	25°C	0.4	0.4	μ s		
			To 1 mV		1.5	1.5			
V _n	Equivalent input noise voltage		f = 10 Hz	25°C	28	28	nV/ $\sqrt{\text{Hz}}$		
			f = 10 kHz		11.6	11.6			
V _{N(PP)}	Peak-to-peak equivalent input noise voltage	R _S = 20 Ω , See Figure 3	f = 10 Hz to 10 kHz	25°C	6	6	μ V		
			f = 0.1 Hz to 10 Hz		0.6	0.6			
I _n	Equivalent input noise current	$V_{IC} = 0$, $f = 10$ kHz	25°C		2.8	2.8	fA/ $\sqrt{\text{Hz}}$		
THD + N	Total harmonic distortion plus noise	$V_O(PP) = 20$ V, $A_{VD} = 10$, $f = 1$ kHz, $R_L = 2\text{k}\Omega$, $R_S = 25$ Ω	25°C		0.008%	0.008%			
B ₁	Unity-gain bandwidth	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C	8*	10	8*	10	MHz	
B _{OM}	Maximum output-swing bandwidth	$V_O(PP) = 20$ V, $A_{VD} = -1$, $R_L = 2\text{k}\Omega$, $C_L = 25$ pF	25°C	478*	637	478*	637	kHz	
ϕ_m	Phase margin at unity gain	$V_I = 10$ mV, $C_L = 25$ pF, See Figure 2	25°C		57°		57°		

*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is -55°C to 125°C.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000


TLE2084Y electrical characteristics at $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLE2084Y			UNIT
		MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{IC} = 0$, $R_S = 50 \Omega$		$V_O = 0$,		7 mV
I_{IO} Input offset current	$V_{IC} = 0$, See Figure 4		$V_O = 0$,	15 100	pA
I_{IB} Input bias current				25 175	pA
V_{ICR} Common-mode input voltage range	$R_S = 50 \Omega$		15 to -11	15 to 11.9	V
V_{OM+} Maximum positive peak output voltage swing	$I_O = -200 \mu\text{A}$		13.8	14.1	V
	$I_O = -2 \text{ mA}$		13.5	13.9	
	$I_O = -20 \text{ mA}$		11.5	12.3	
V_{OM-} Maximum negative peak output voltage swing	$I_O = 200 \mu\text{A}$		-13.8	-14.2	V
	$I_O = 2 \text{ mA}$		-13.5	-14	
	$I_O = 20 \text{ mA}$		-11.5	-12.4	
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 10 \text{ V}$	$R_L = 600 \Omega$	80	96	dB
		$R_L = 2 \text{ k}\Omega$	90	109	
		$R_L = 10 \text{ k}\Omega$	95	118	
r_i Input resistance	$V_{IC} = 0$			10^{12}	Ω
c_i Input capacitance	$V_{IC} = 0$, See Figure 5	Common mode		7.5	pF
		Differential		2.5	
z_o Open-loop output impedance	$f = 1 \text{ MHz}$			80	Ω
CMRR Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$, $R_S = 50 \Omega$	$V_O = 0$,		80 98	dB
k_{SVR} Supply-voltage rejection ratio ($\Delta V_{CC\pm} / \Delta V_{IO}$)	$V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}$, $V_O = 0$, $R_S = 50 \Omega$			82 99	dB
I_{CC} Supply current (four amplifiers)	$V_O = 0$, No load		5.2 6.5 7.5	mA	
I_{OS} Short-circuit output current	$V_O = 0$	$V_{ID} = 1 \text{ V}$	-30 -45		mA
		$V_{ID} = -1 \text{ V}$	30 48		

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

PARAMETER MEASUREMENT INFORMATION

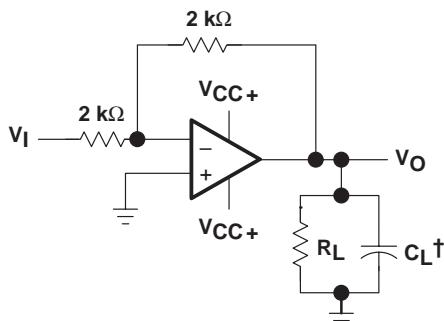

† Includes fixture capacitance

Figure 1. Slew-Rate Test Circuit

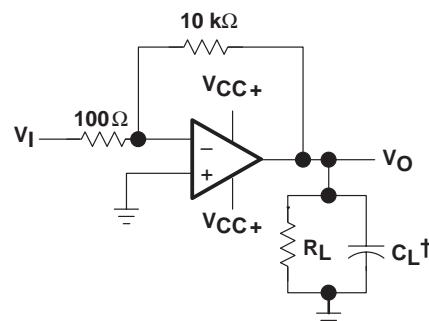

† Includes fixture capacitance

**Figure 2. Unity-Gain Bandwidth
and Phase-Margin Test Circuit**

† Includes fixture capacitance

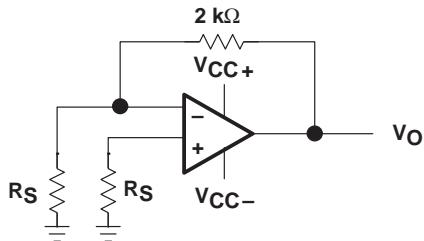
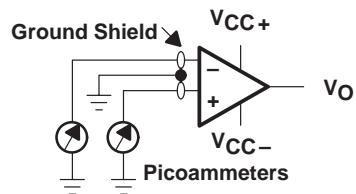


Figure 3. Noise-Voltage Test Circuit



**Figure 4. Input-Bias and Offset-
Current Test Circuit**

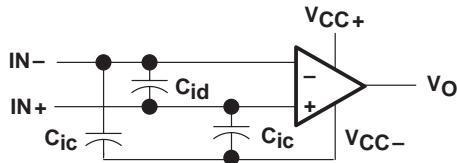


Figure 5. Internal Input Capacitance

typical values

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

input bias and offset current

At the picoampere bias-current level typical of the TLE208x and TLE208xA, accurate measurement of the bias becomes difficult. Not only does this measurement require a picoammeter, but test socket leakages can easily exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted in the socket and a second test is performed that measures both the socket leakage and the device input bias current. The two measurements are then subtracted algebraically to determine the bias current of the device.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS

Table of Graphs

		FIGURE
V_{IO}	Input offset voltage	Distribution 6, 7, 8
αV_{IO}	Input offset voltage temperature coefficient	Distribution 9, 10, 11
I_{IO}	Input offset current	vs Free-air temperature 12 – 15
I_{IB}	Input bias current	vs Free-air temperature 12 – 15 vs Supply voltage 16
V_{ICR}	Common-mode input voltage range	vs Free-air temperature 17
V_{ID}	Differential input voltage	vs Output voltage 18, 19
V_{OM+}	Maximum positive peak output voltage	vs Output current 20, 21 vs Free-air temperature 24, 25 vs Supply voltage 26
V_{OM-}	Maximum negative peak output voltage	vs Output current 22, 23 vs Free-air temperature 24, 25 vs Supply voltage 26
$V_O(PP)$	Maximum peak-to-peak output voltage	vs Frequency 27
V_O	Output voltage	vs Settling time 28
A_{VD}	Large-signal differential voltage amplification	vs Load resistance 29 vs Free-air temperature 30, 31
A_{VD}	Small-signal differential voltage amplification	vs Frequency 32, 33
$CMRR$	Common-mode rejection ratio	vs Frequency 34 vs Free-air temperature 35
k_{SVR}	Supply-voltage rejection ratio	vs Frequency 36 vs Free-air temperature 37
I_{CC}	Supply current	vs Supply voltage 38, 39, 40 vs Free-air temperature 41, 42, 43 vs Differential input voltage 44 – 49
I_{OS}	Short-circuit output current	vs Supply voltage 50 vs Elapsed time 51 vs Free-air temperature 52
SR	Slew rate	vs Free-air temperature 53, 54 vs Load resistance 55 vs Differential input voltage 56
V_n	Equivalent input noise voltage	vs Frequency 57
V_n	Input-referred noise voltage	vs Noise bandwidth frequency 58 Over a 10-second time interval 59
	Third-octave spectral noise density	vs Frequency bands 60
$THD + N$	Total harmonic distortion plus noise	vs Frequency 61, 62
B_1	Unity-gain bandwidth	vs Load capacitance 63
	Gain-bandwidth product	vs Free-air temperature 64 vs Supply voltage 65
	Gain margin	vs Load capacitance 66
ϕ_m	Phase margin	vs Free-air temperature 67 vs Supply voltage 68 vs Load capacitance 69
	Phase shift	vs Frequency 32, 33

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS

Table of Graphs (Continued)

		FIGURE
Noninverting large-signal pulse response	vs Time	70
Small-signal pulse response	vs Time	71
Z_O	Closed-loop output impedance	72
a_X	Crosstalk attenuation	73

**DISTRIBUTION OF TLE2081
INPUT OFFSET VOLTAGE**

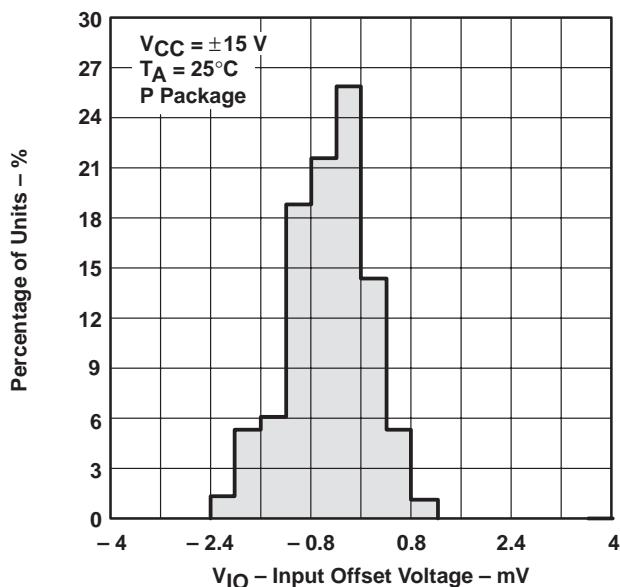


Figure 6

**DISTRIBUTION OF TLE2082
INPUT OFFSET VOLTAGE**

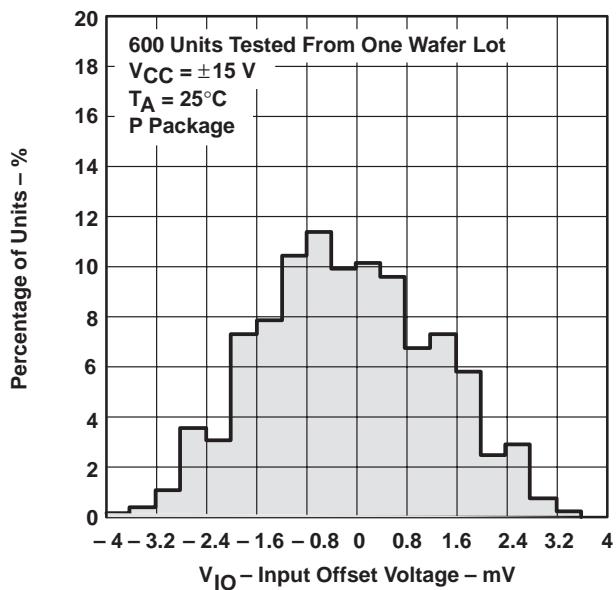


Figure 7

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS

DISTRIBUTION OF TLE2084 INPUT OFFSET VOLTAGE

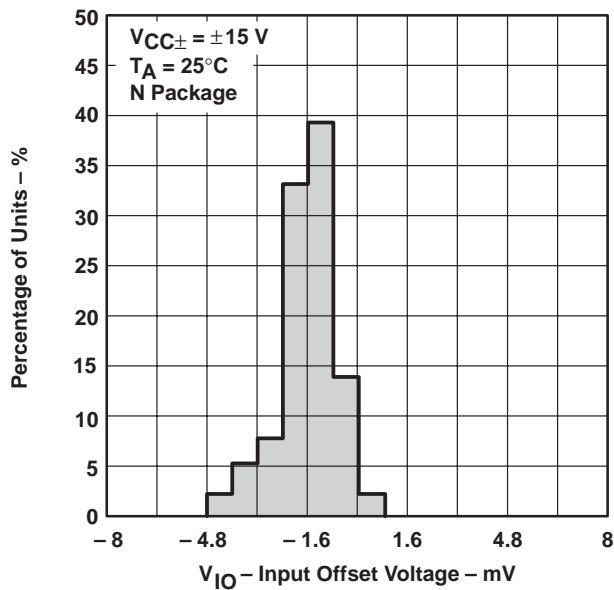


Figure 8

DISTRIBUTION OF TLE2081 INPUT OFFSET VOLTAGE TEMPERATURE COEFFICIENT

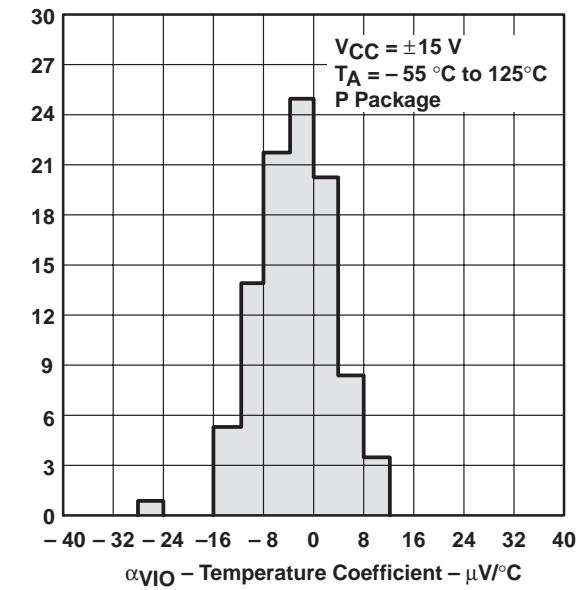


Figure 9

DISTRIBUTION OF TLE2082 INPUT OFFSET VOLTAGE TEMPERATURE COEFFICIENT

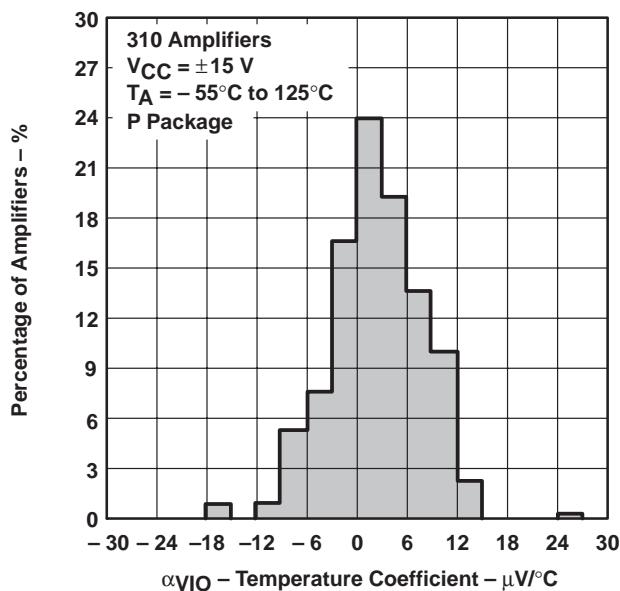


Figure 10

DISTRIBUTION OF TLE2084 INPUT OFFSET VOLTAGE TEMPERATURE COEFFICIENT

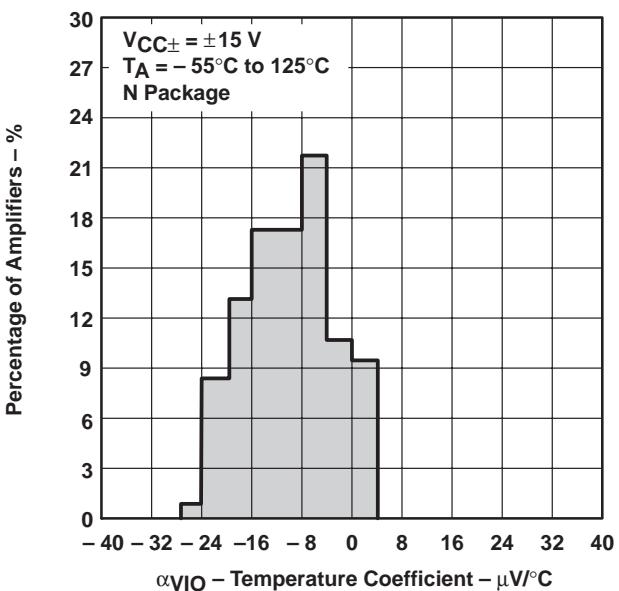


Figure 11

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS[†]

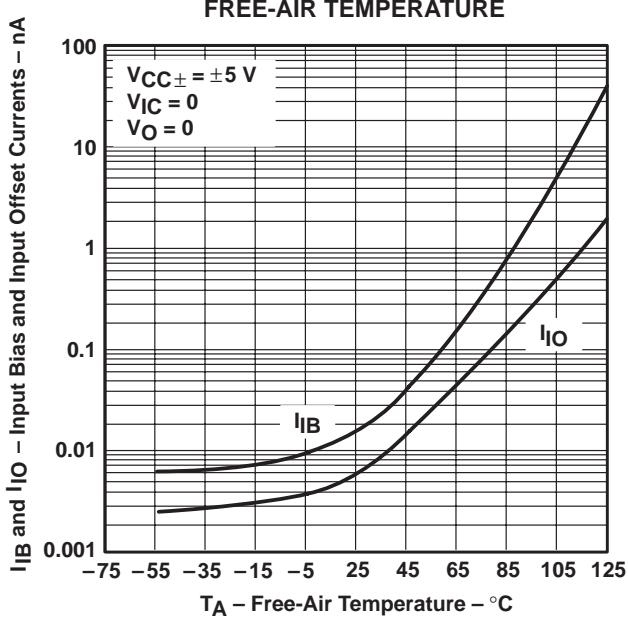


Figure 12

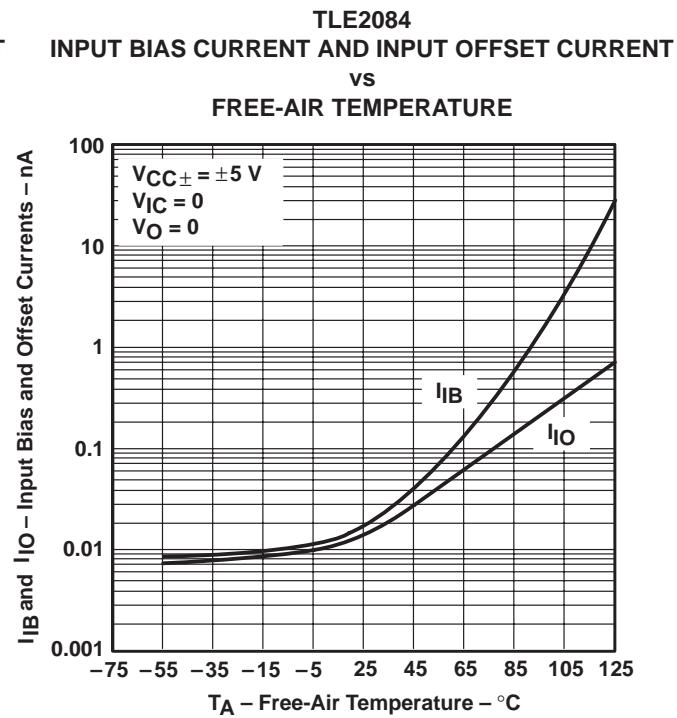


Figure 13

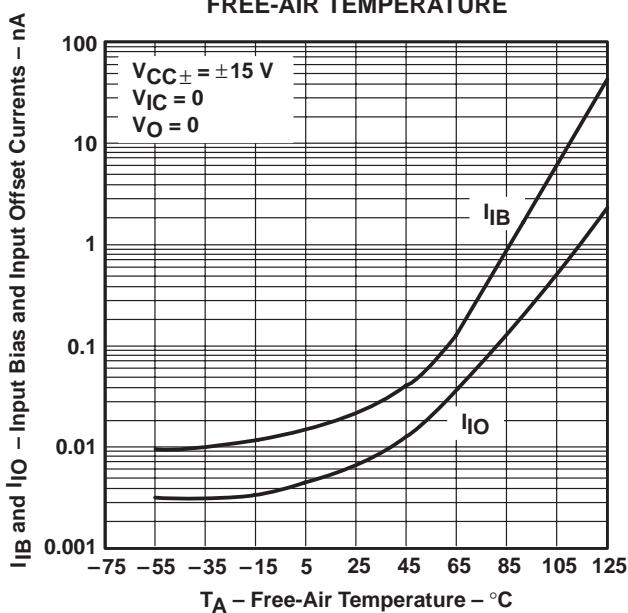


Figure 14





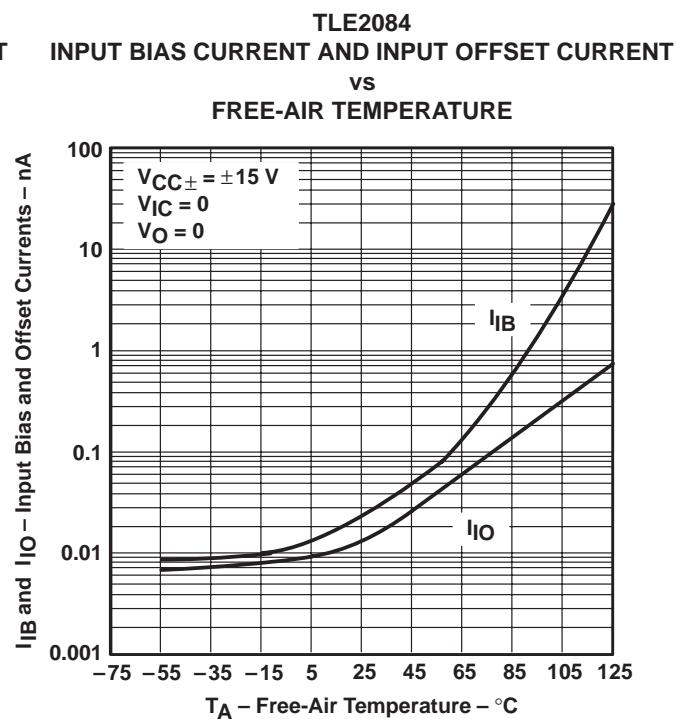


Figure 15

[†] Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xY
**EXCALIBUR HIGH-SPEED JFET-INPUT
 OPERATIONAL AMPLIFIERS**
 SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

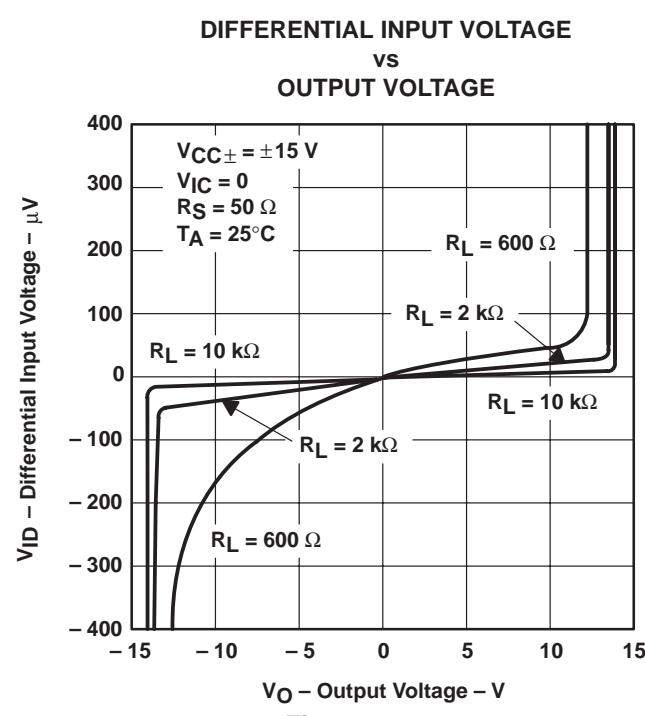
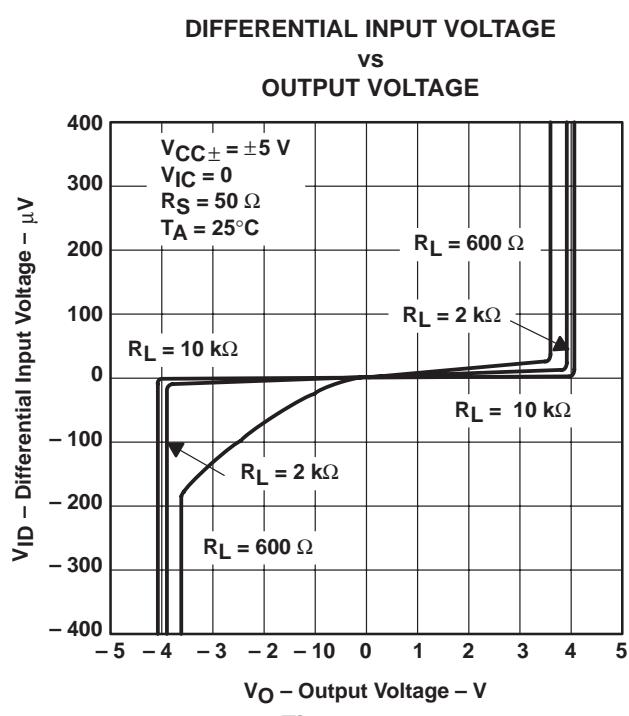
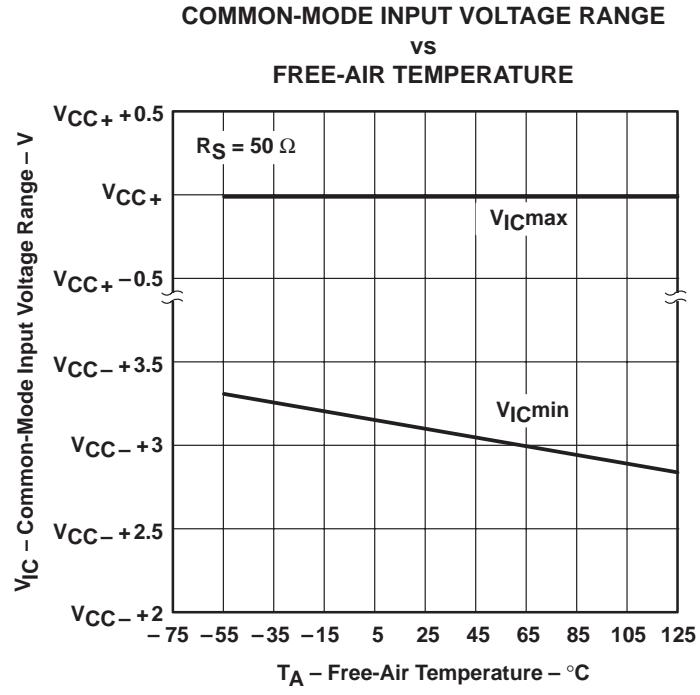
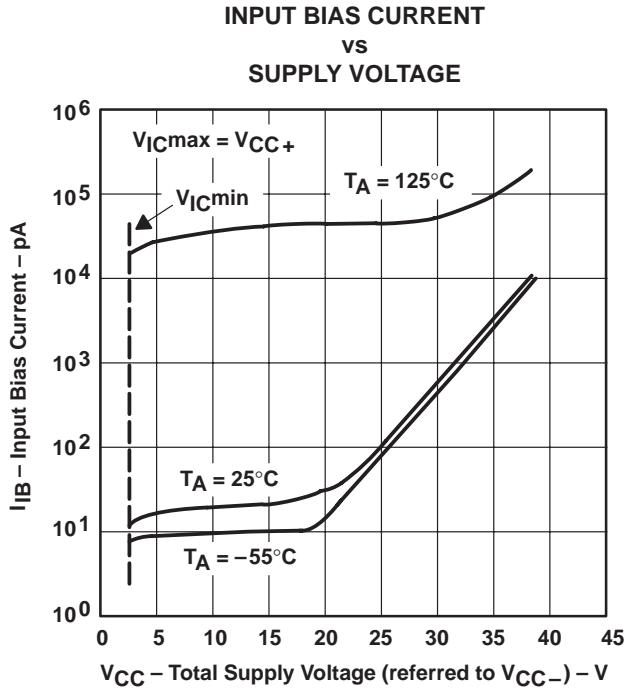


† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

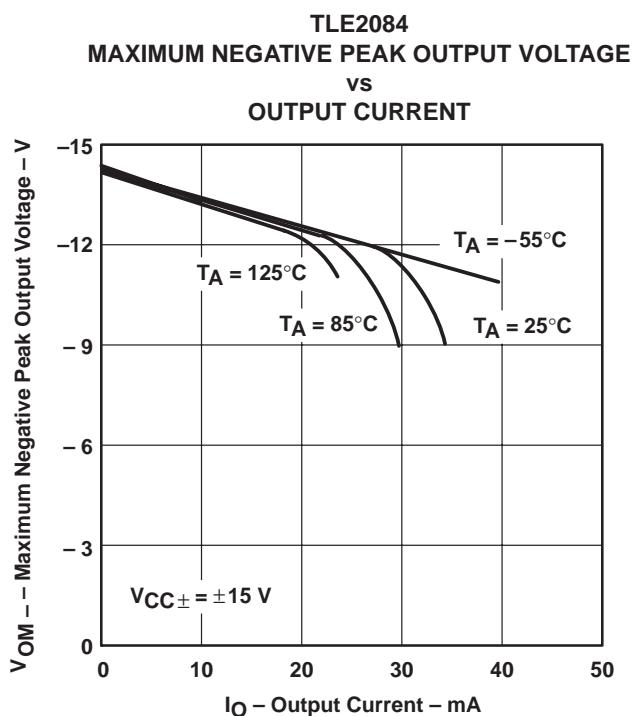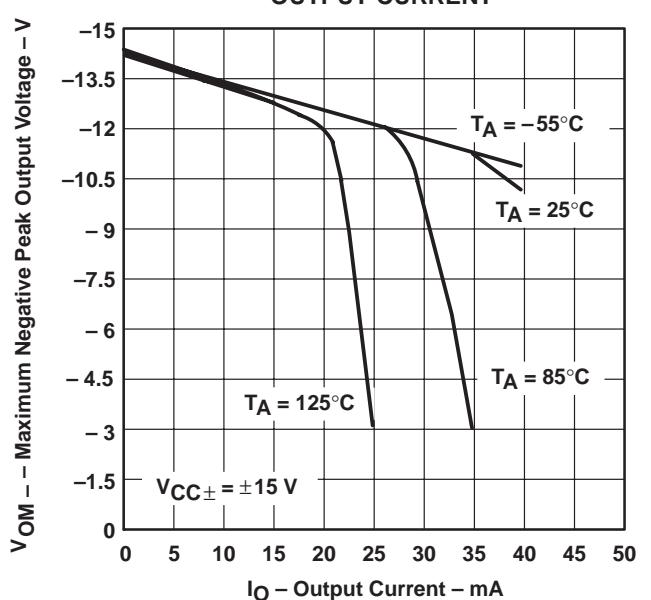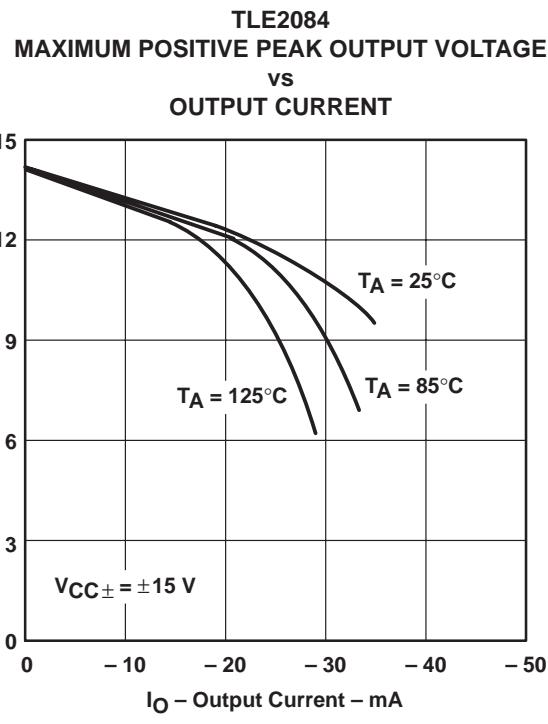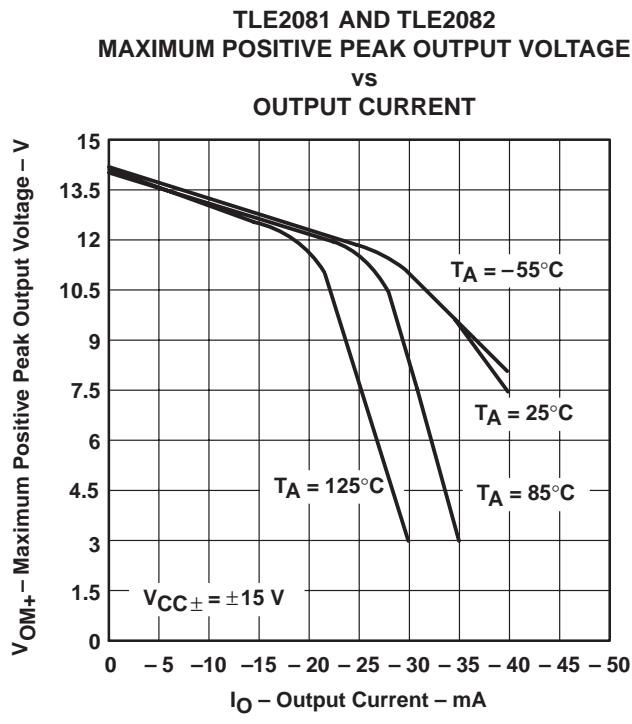

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS
SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

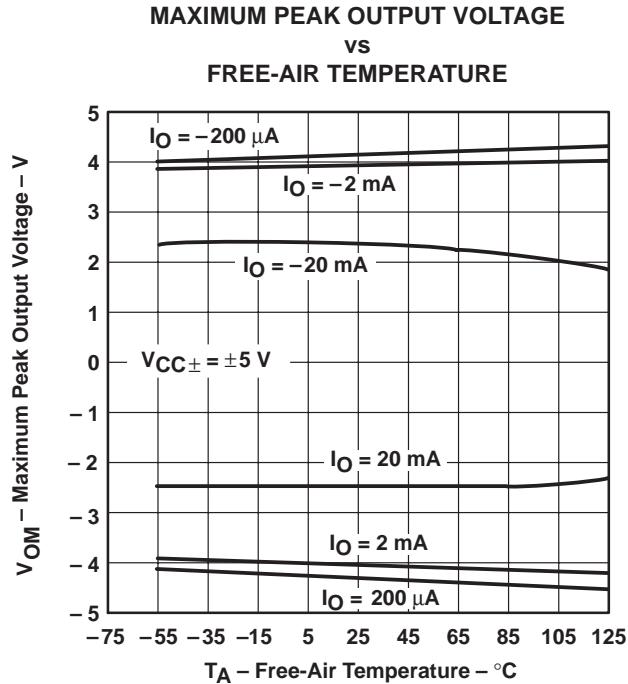


Figure 24

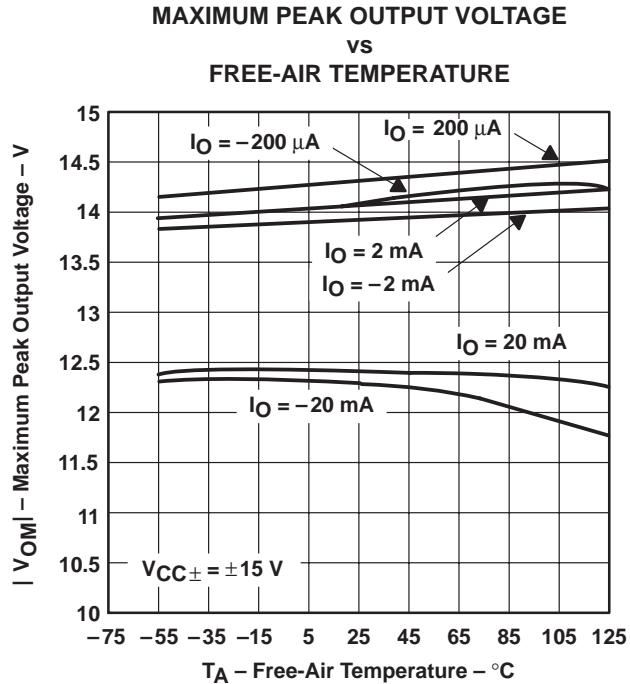


Figure 25

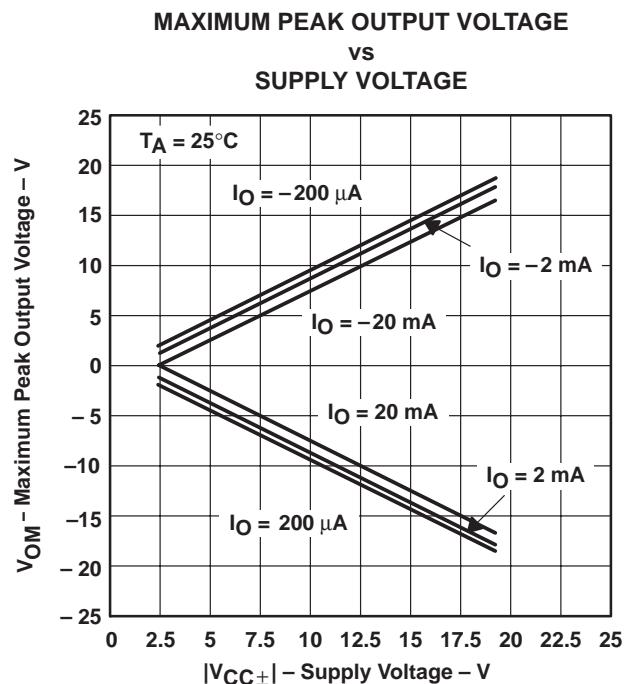


Figure 26

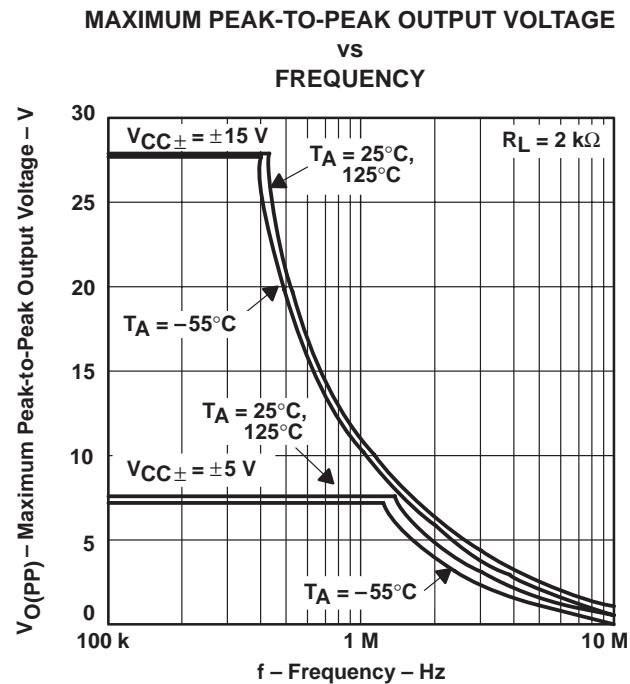


Figure 27

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS[†]

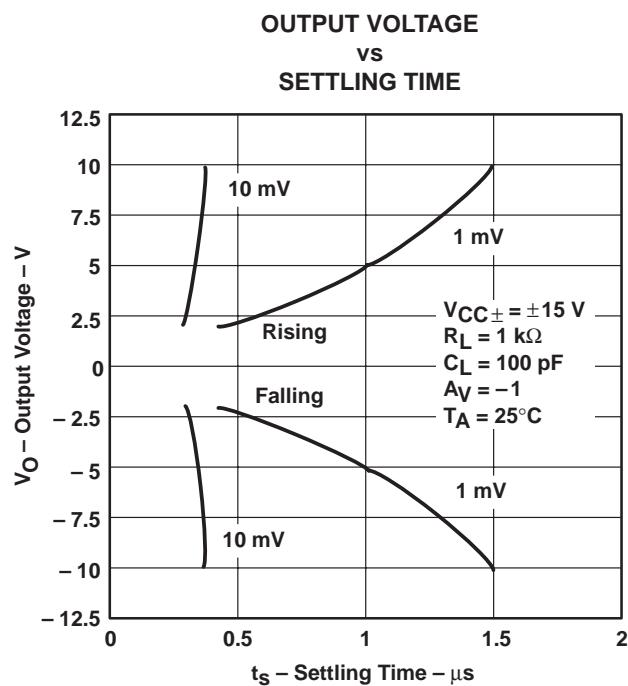


Figure 28

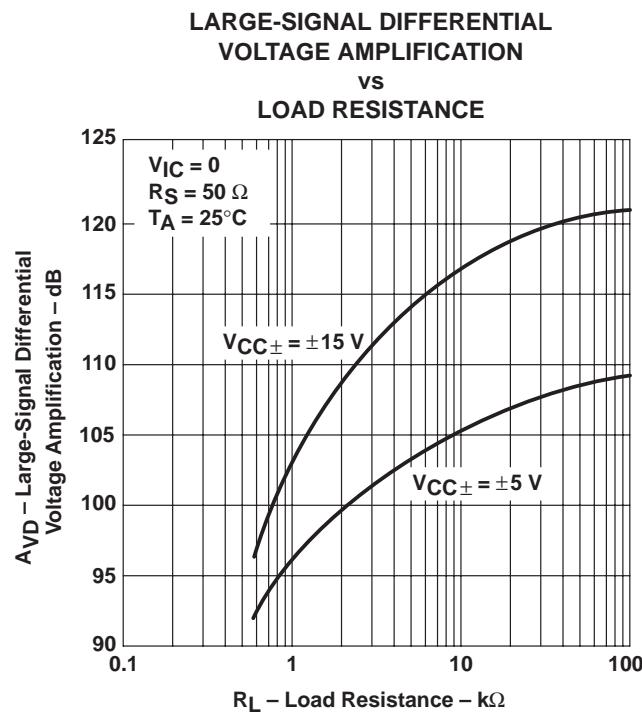


Figure 29

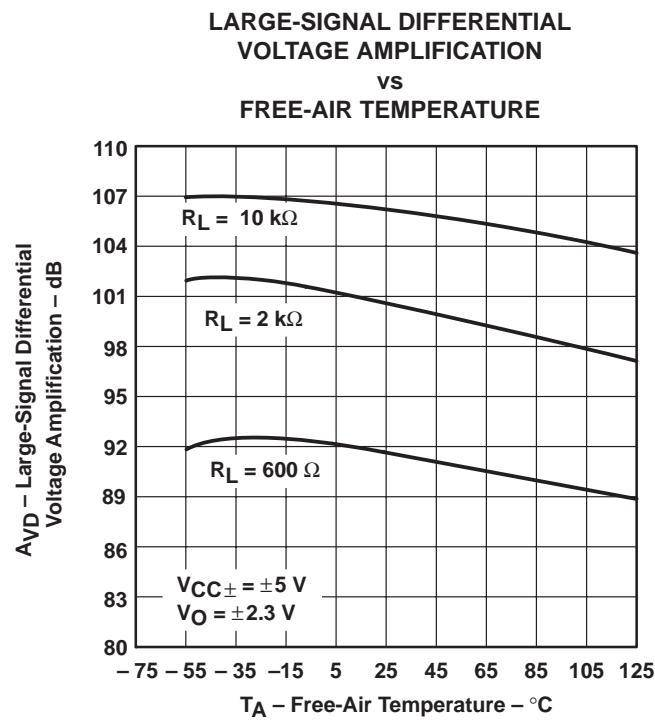


Figure 30

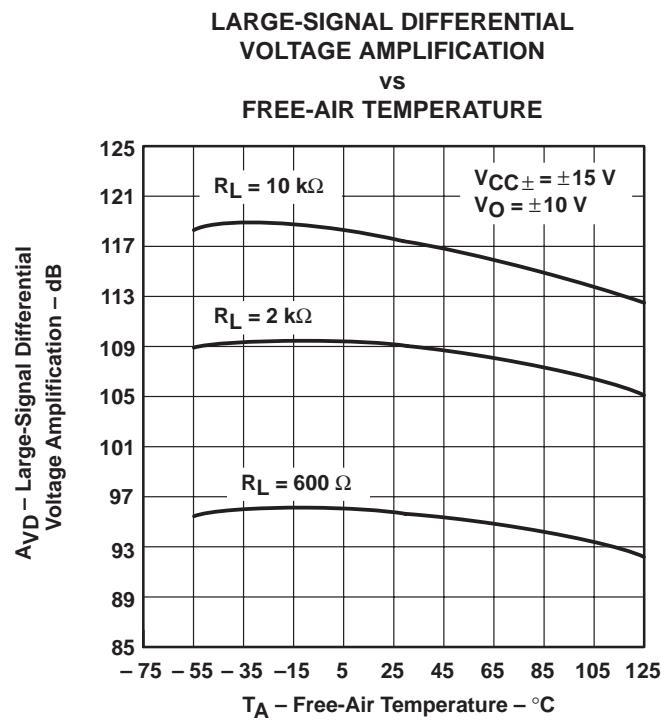


Figure 31

[†] Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS

**SMALL-SIGNAL DIFFERENTIAL VOLTAGE
AMPLIFICATION AND PHASE SHIFT**

vs
FREQUENCY

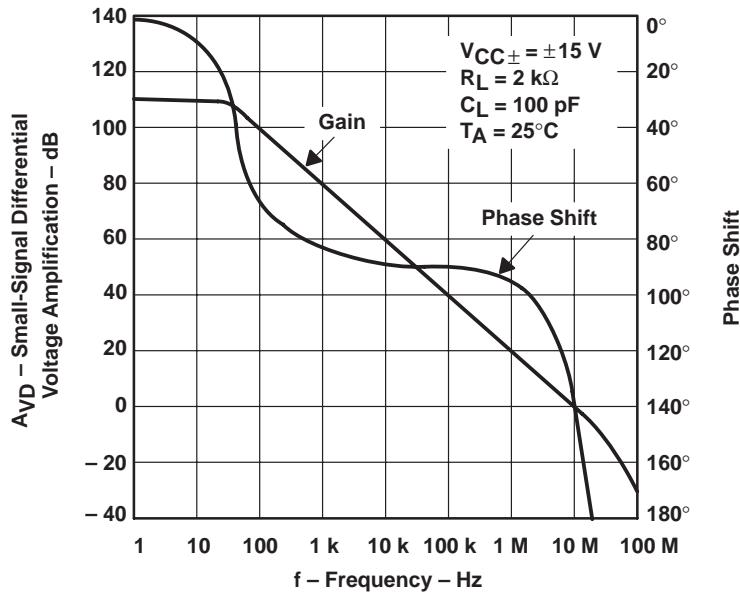


Figure 32

**SMALL-SIGNAL DIFFERENTIAL VOLTAGE
AMPLIFICATION AND PHASE SHIFT**

vs
FREQUENCY





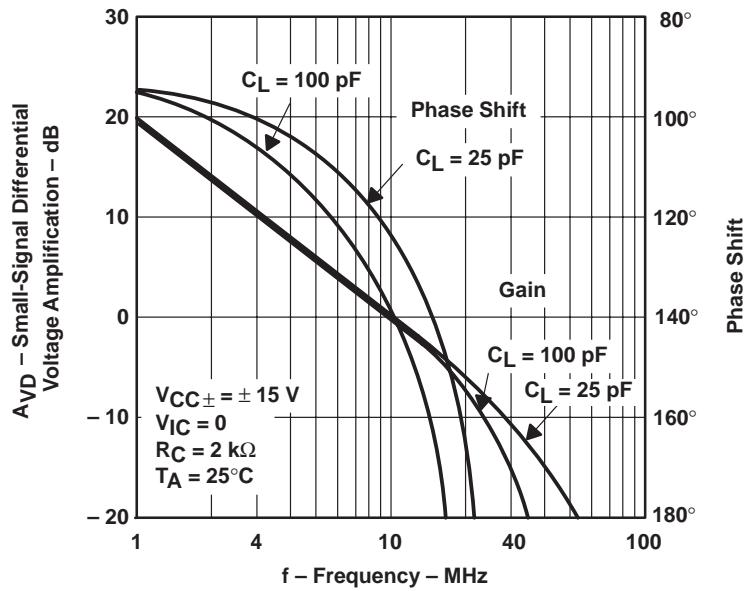


Figure 33

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS[†]

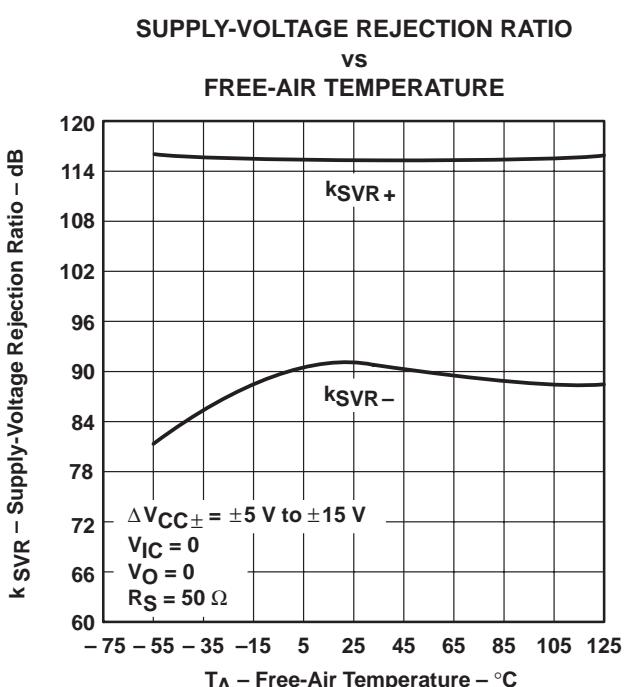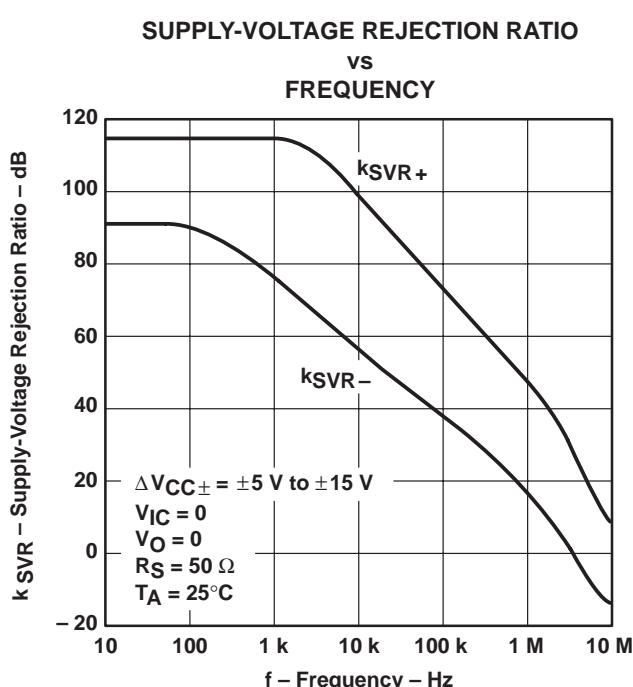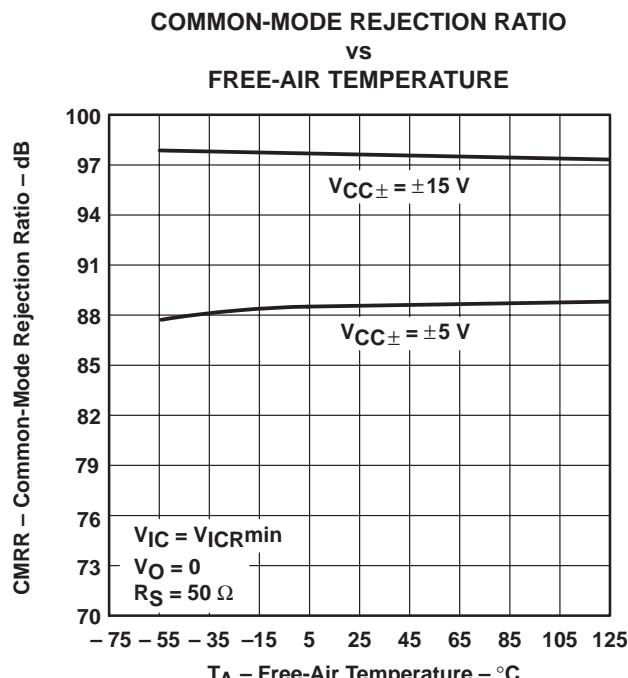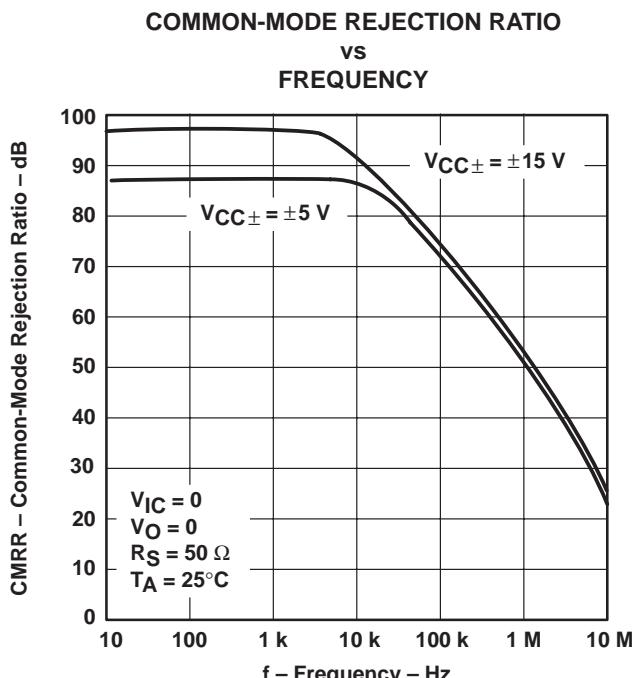

[†] Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**
SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

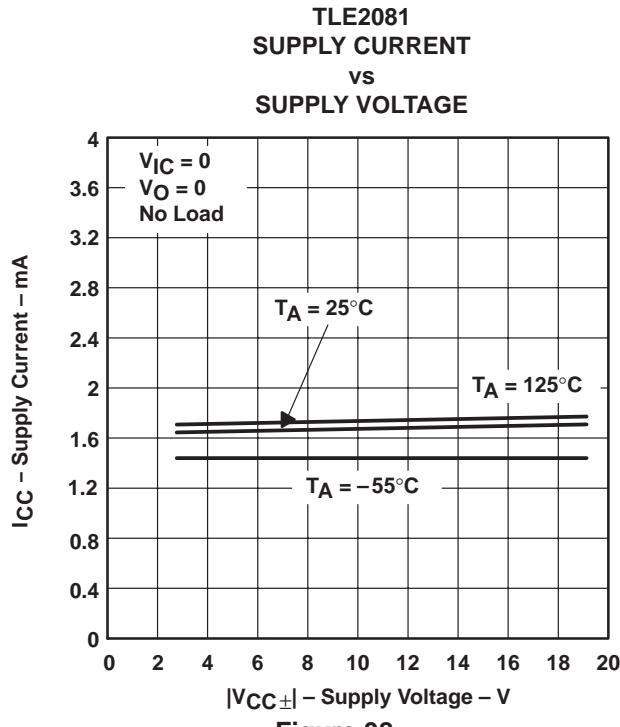


Figure 38

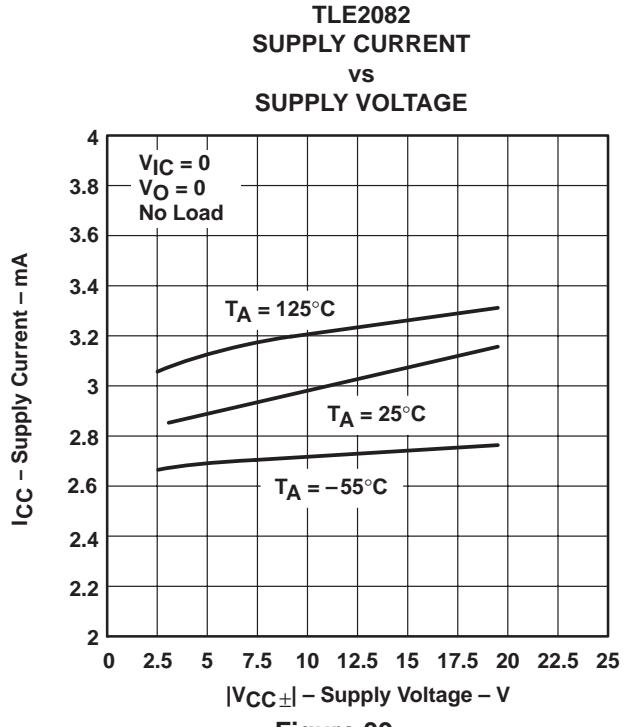


Figure 39

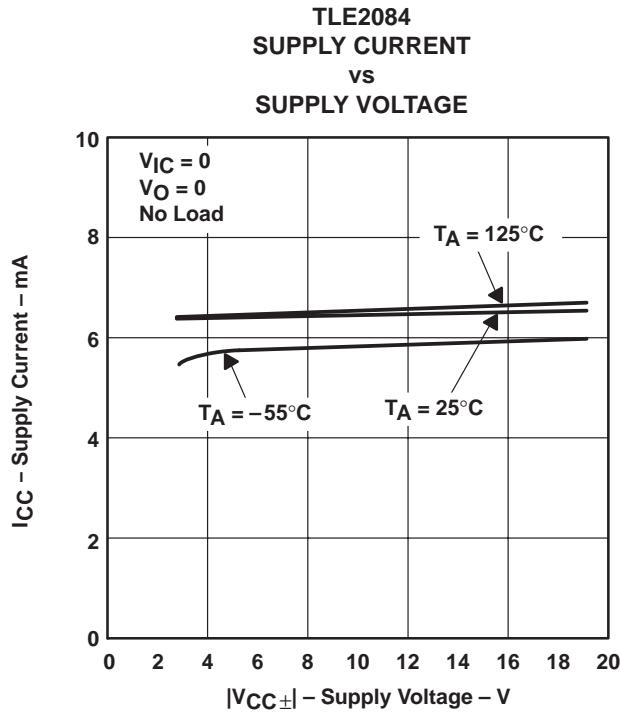


Figure 40

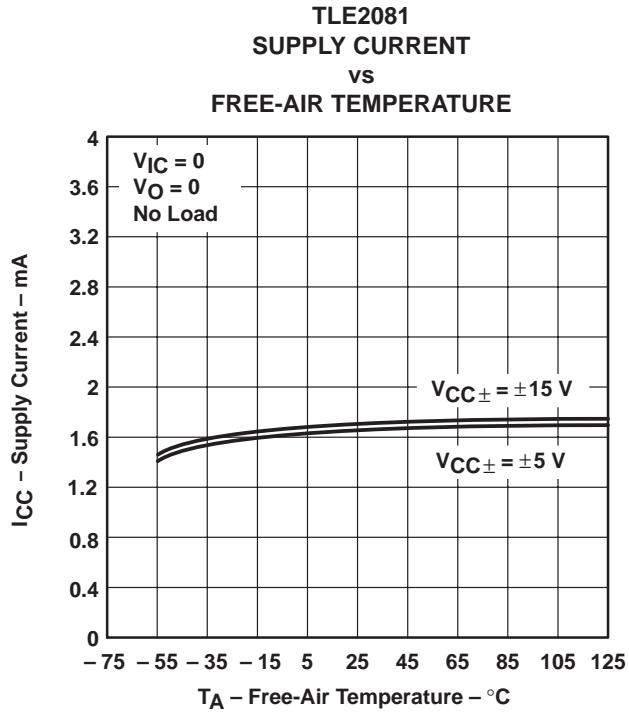


Figure 41

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

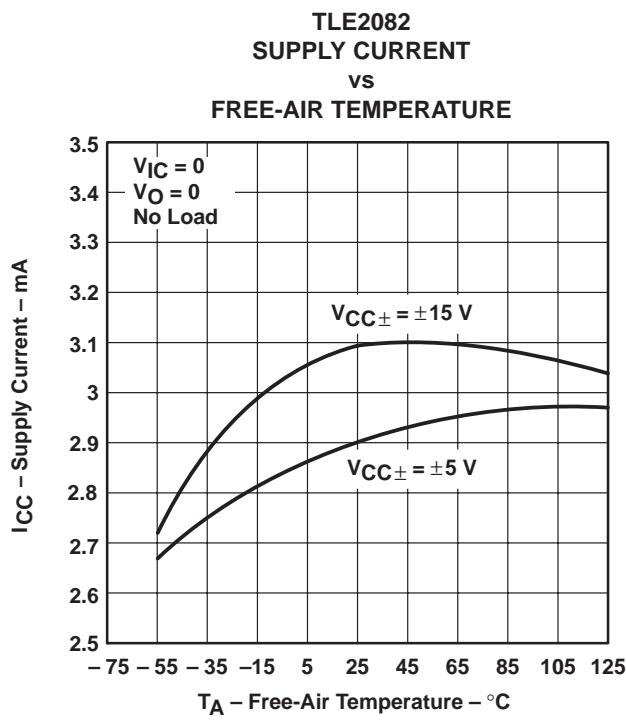


Figure 42

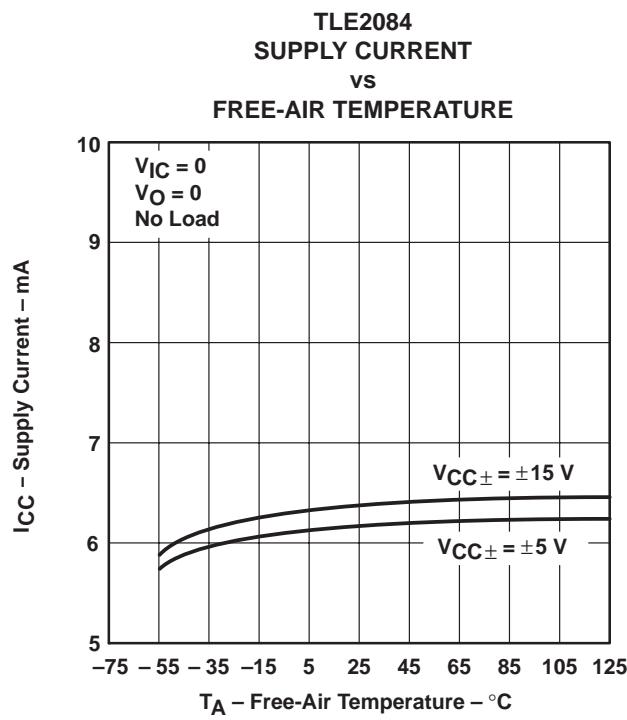


Figure 43

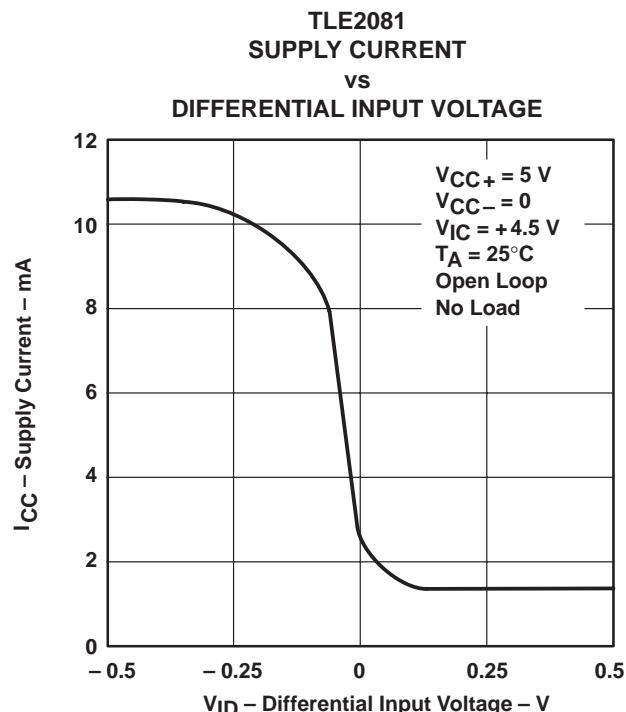


Figure 44

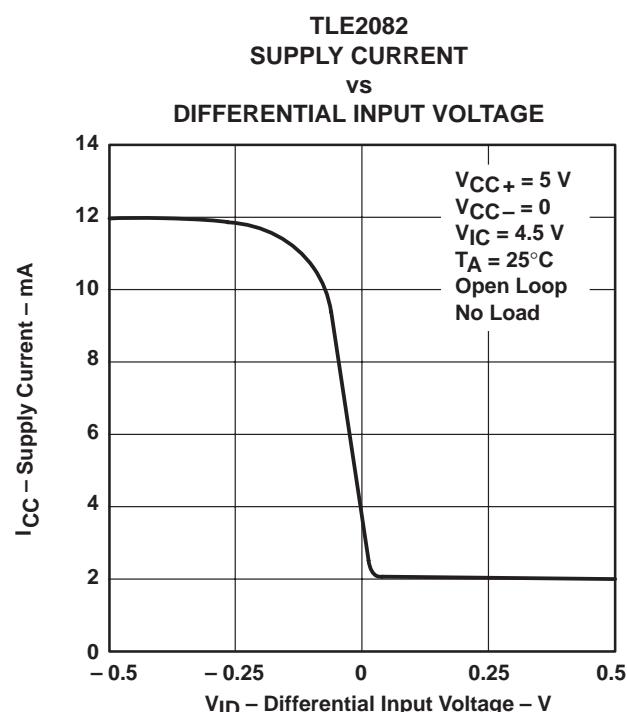


Figure 45

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**
SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS

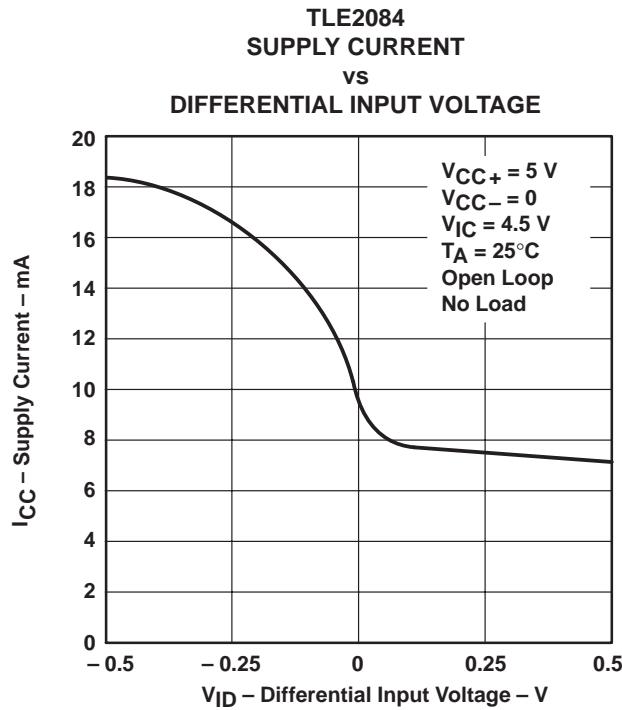


Figure 46

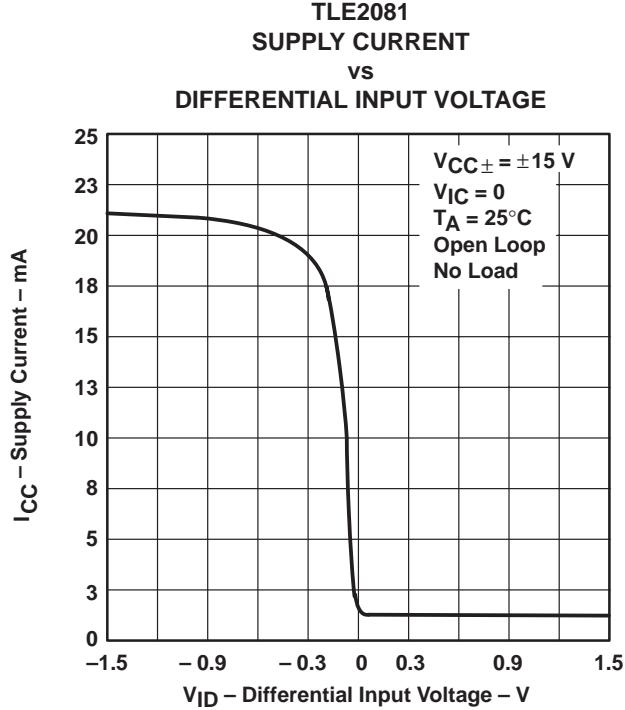


Figure 47

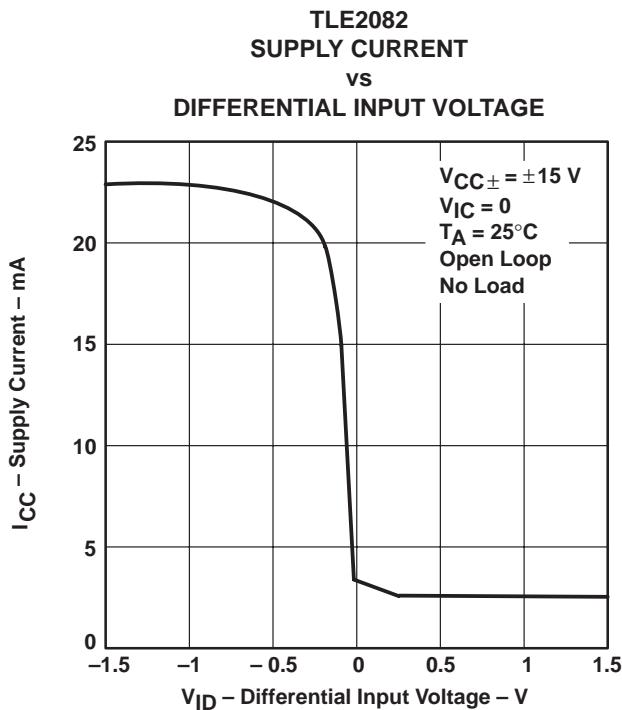


Figure 48

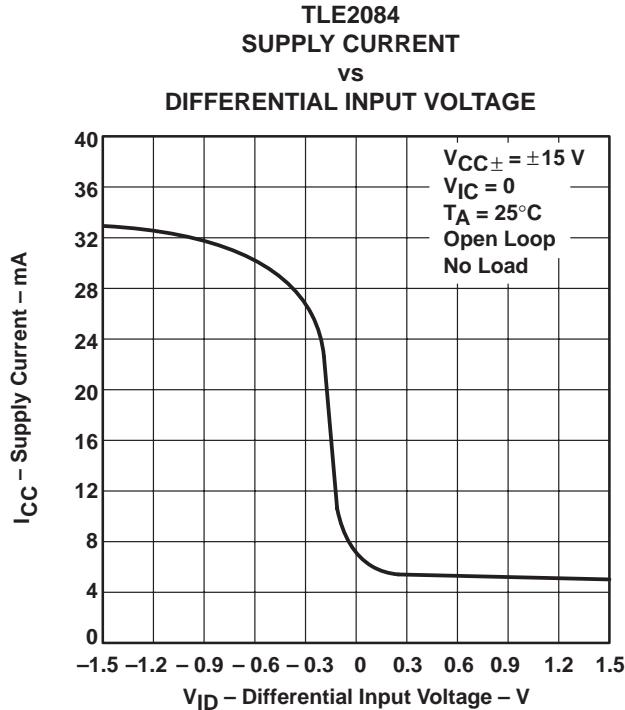


Figure 49

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS[†]

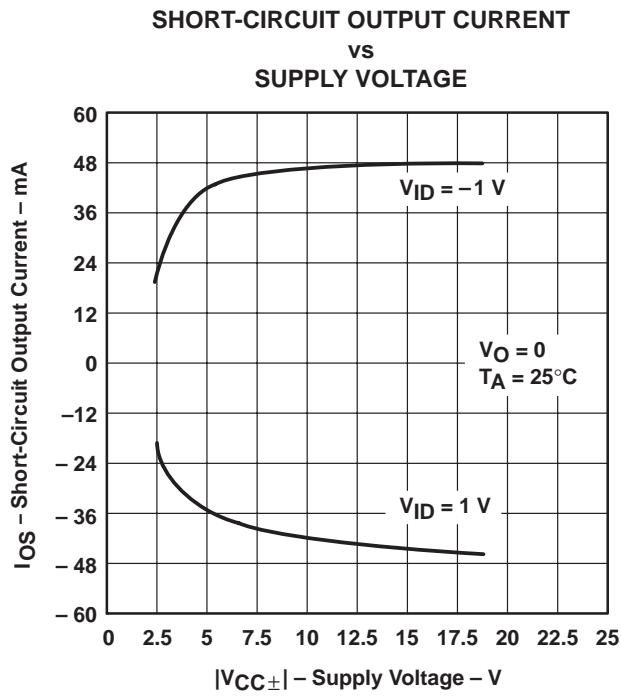


Figure 50

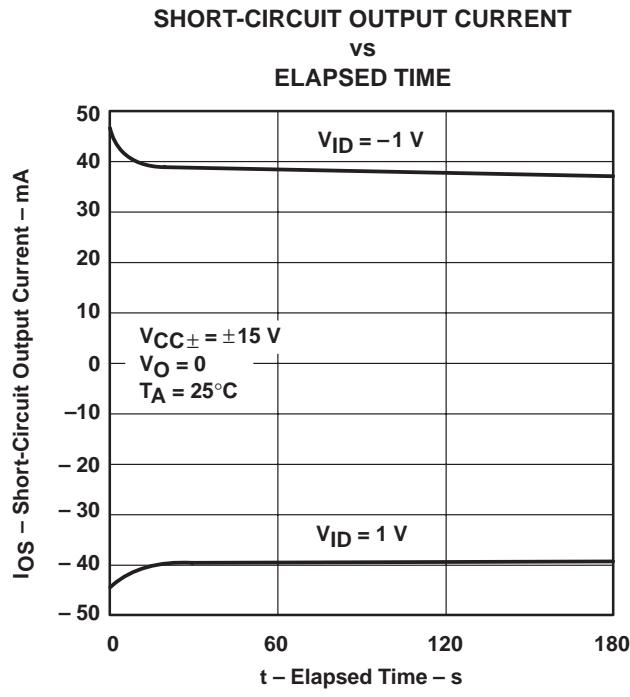


Figure 51

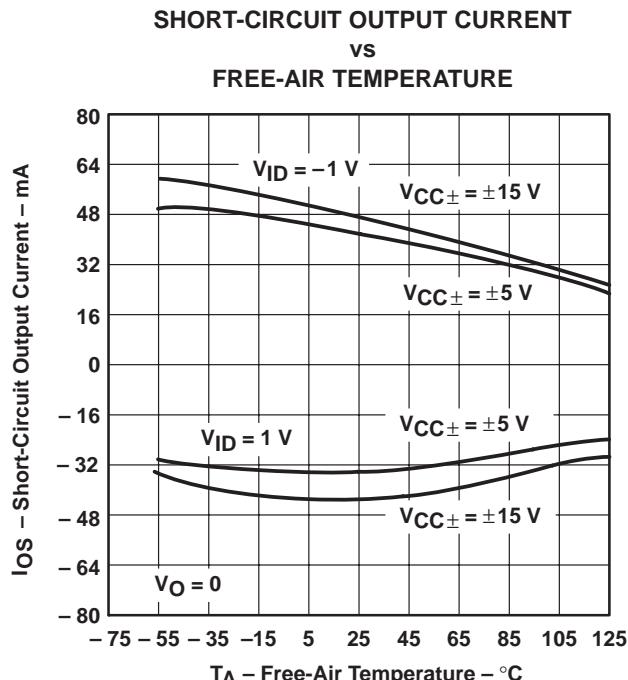


Figure 52





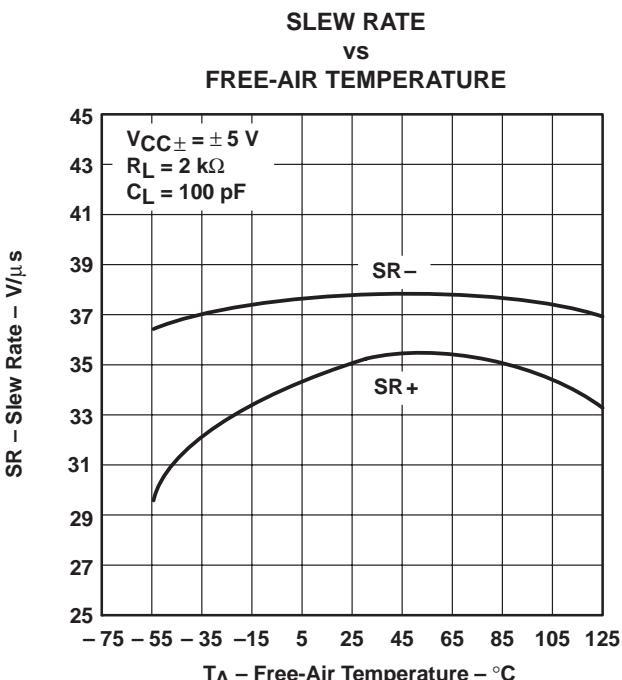


Figure 53

[†] Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS
SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

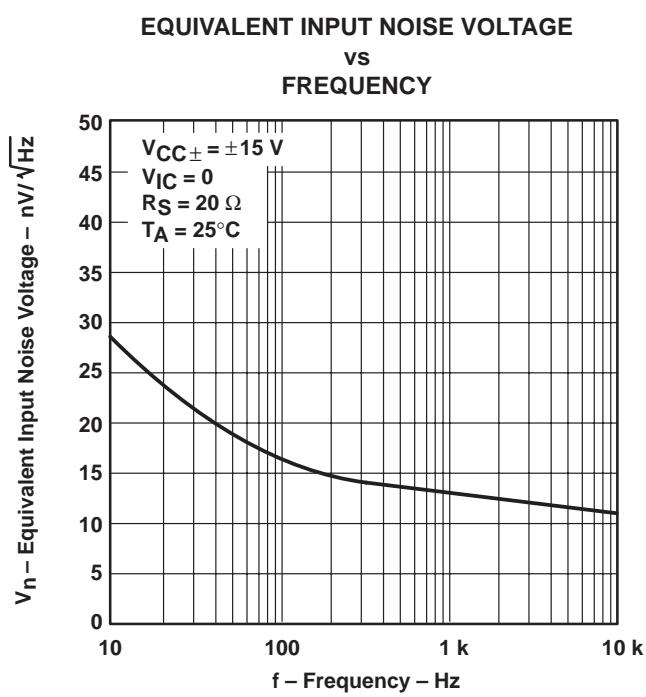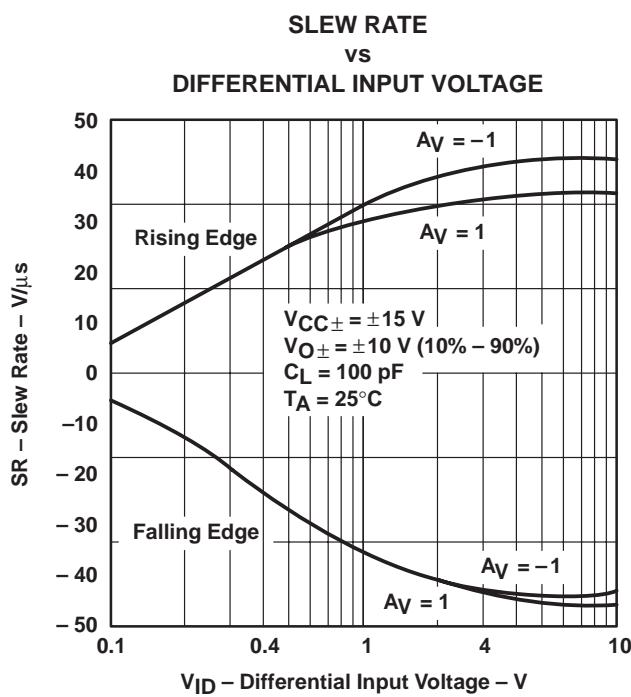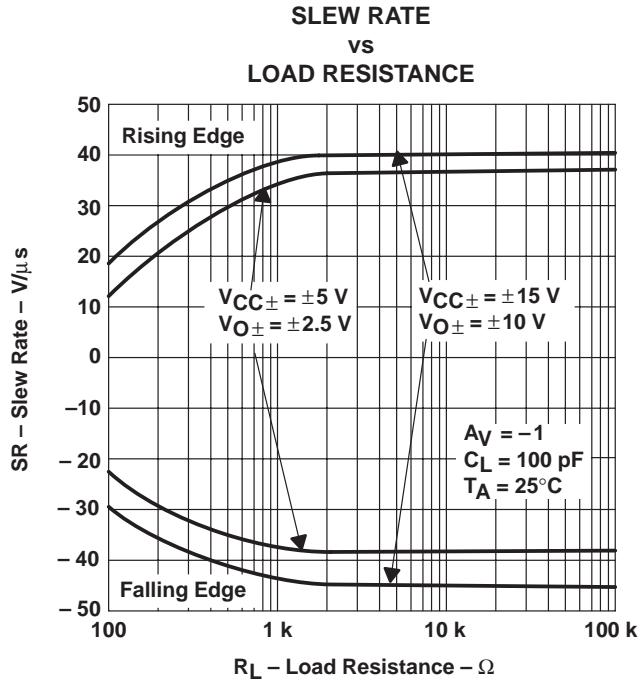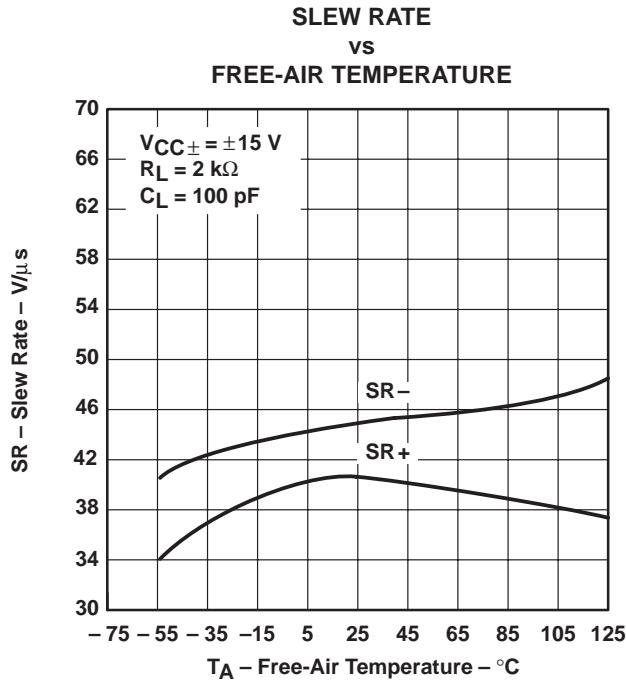

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS

INPUT-REFERRED NOISE VOLTAGE vs NOISE BANDWIDTH FREQUENCY

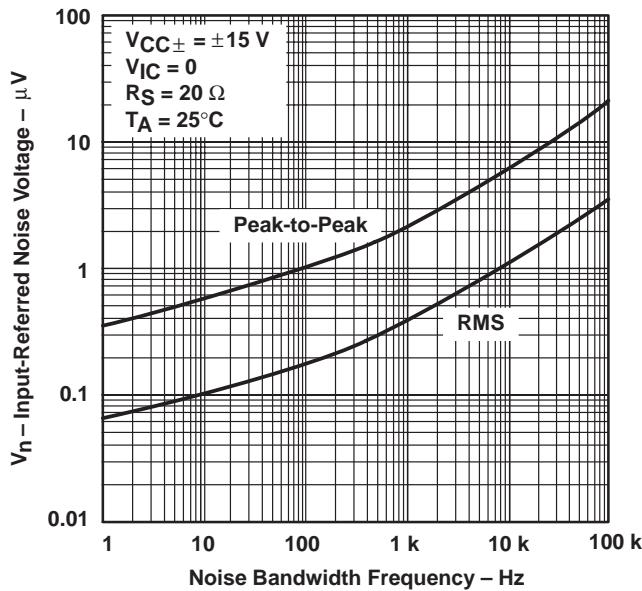


Figure 58

INPUT-REFERRED NOISE VOLTAGE OVER A 10-SECOND TIME INTERVAL

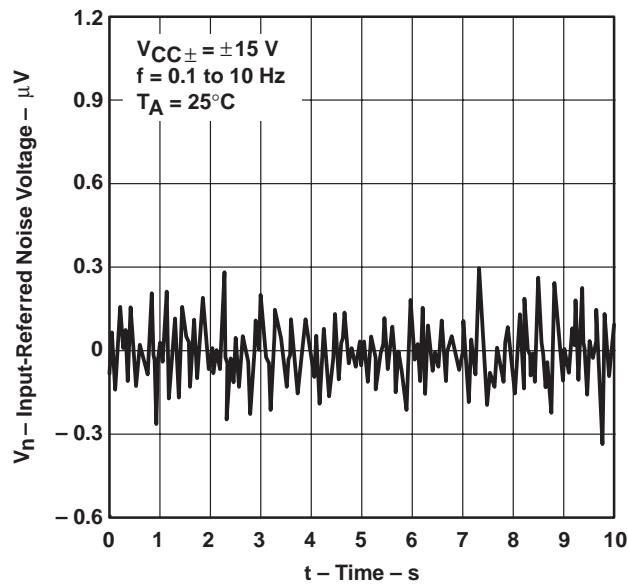


Figure 59

THIRD-OCTAVE SPECTRAL NOISE DENSITY vs FREQUENCY BANDS

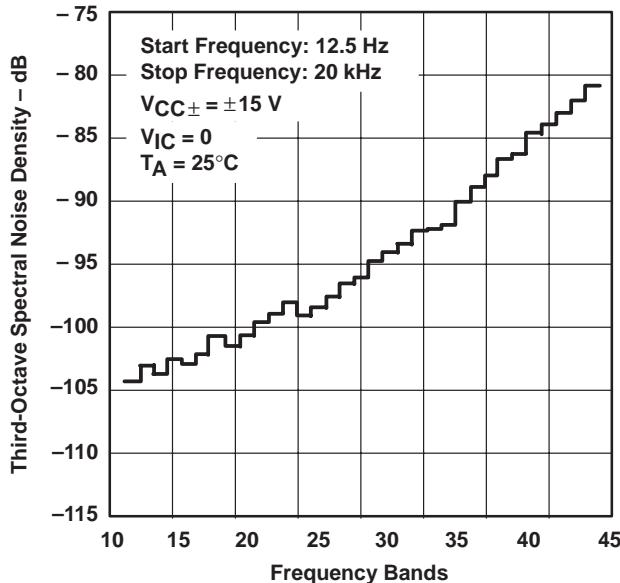


Figure 60

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

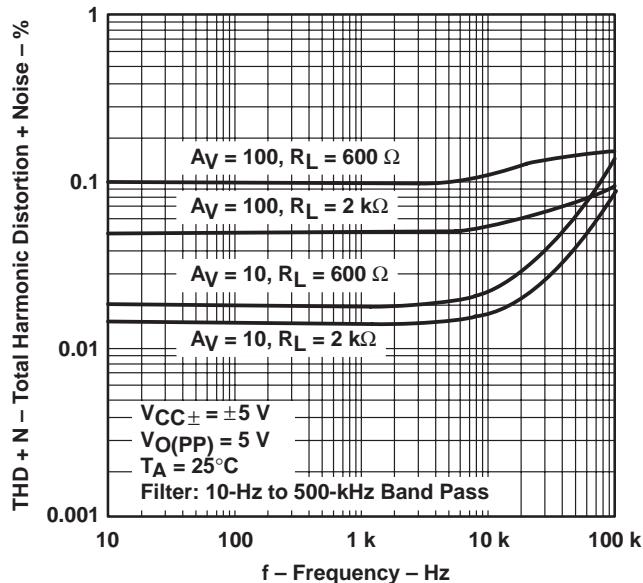


Figure 61

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

**TOTAL HARMONIC DISTORTION PLUS NOISE
vs
FREQUENCY**

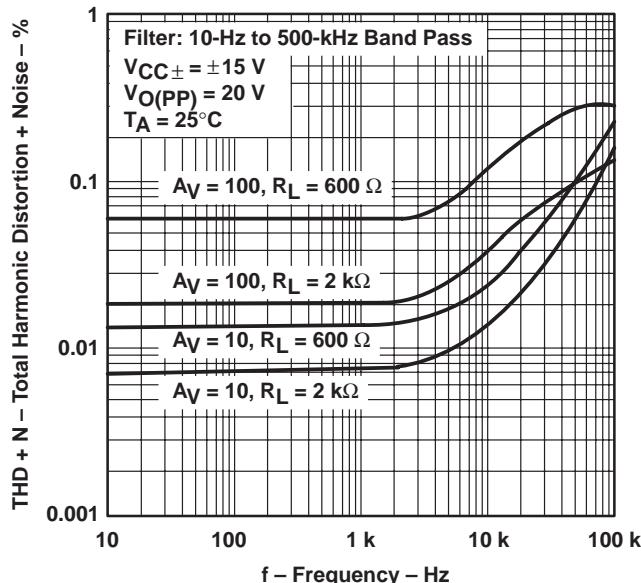


Figure 62

**UNITY-GAIN BANDWIDTH
vs
LOAD CAPACITANCE**

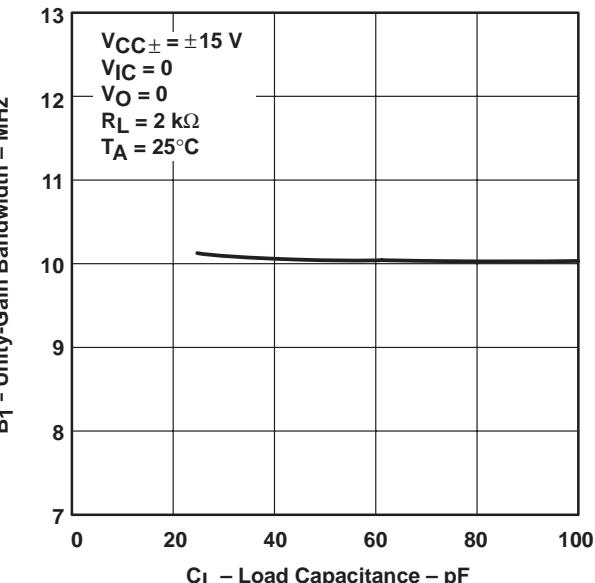


Figure 63

**GAIN-BANDWIDTH PRODUCT
vs
FREE-AIR TEMPERATURE**

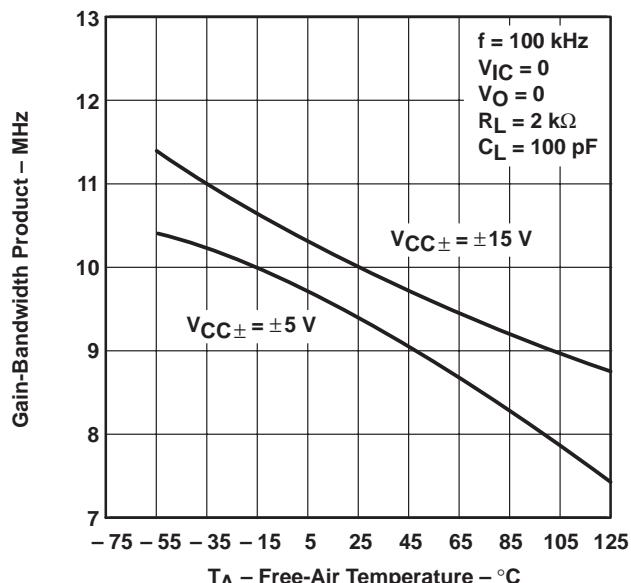


Figure 64

**GAIN-BANDWIDTH PRODUCT
vs
SUPPLY VOLTAGE**

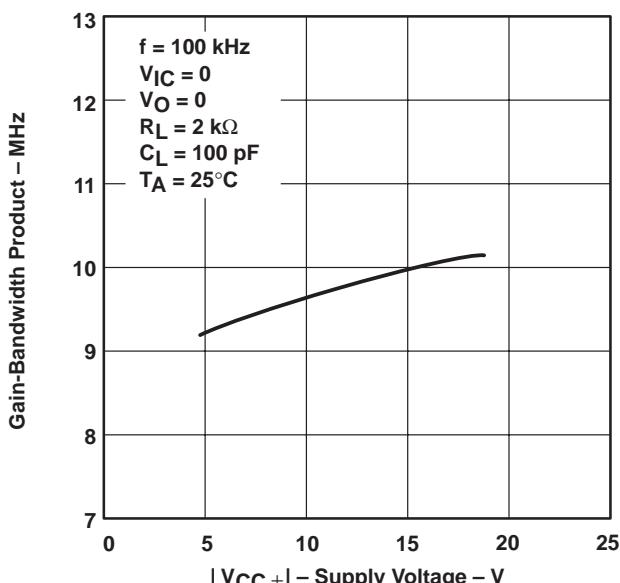


Figure 65

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS[†]

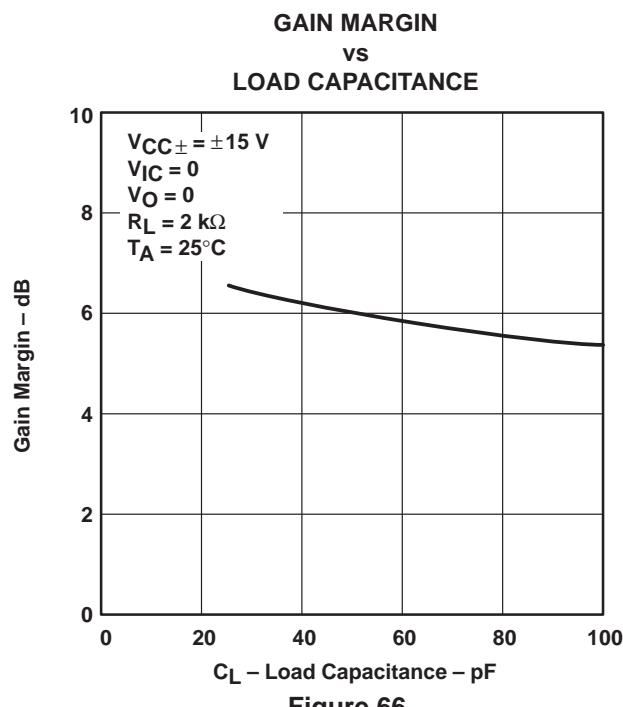


Figure 66

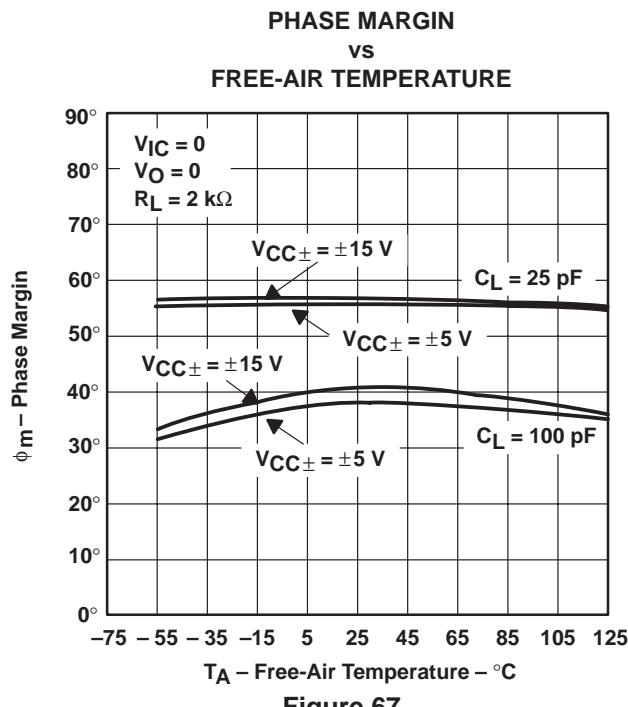


Figure 67

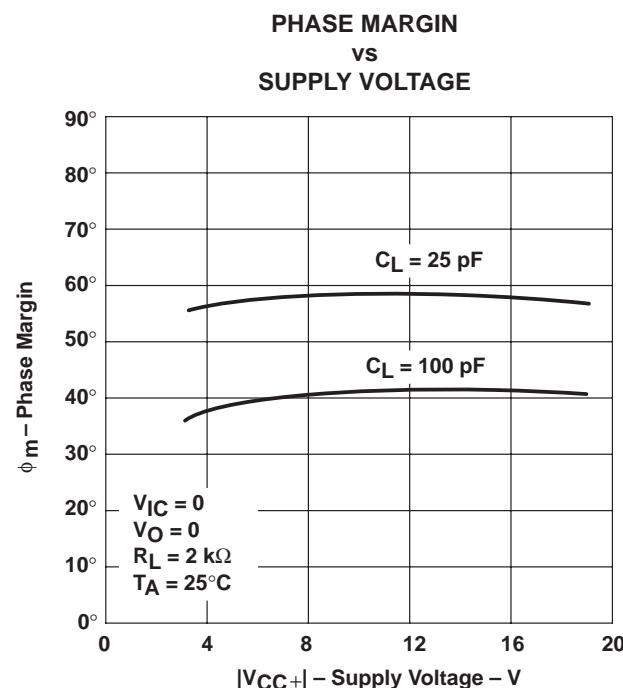


Figure 68

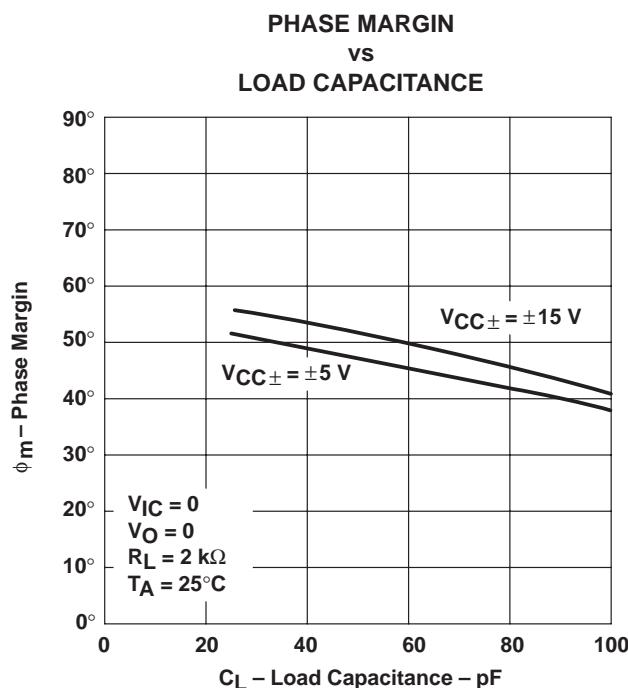


Figure 69

[†] Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS
SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

TYPICAL CHARACTERISTICS†

**NONINVERTING LARGE-SIGNAL
PULSE RESPONSE**

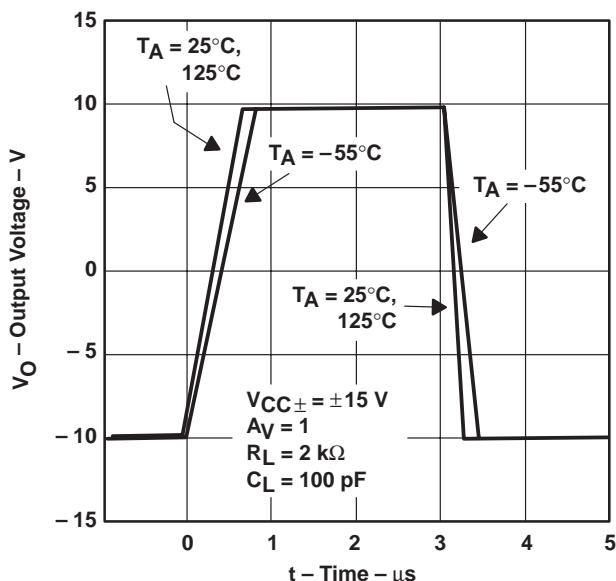


Figure 70

SMALL-SIGNAL PULSE RESPONSE

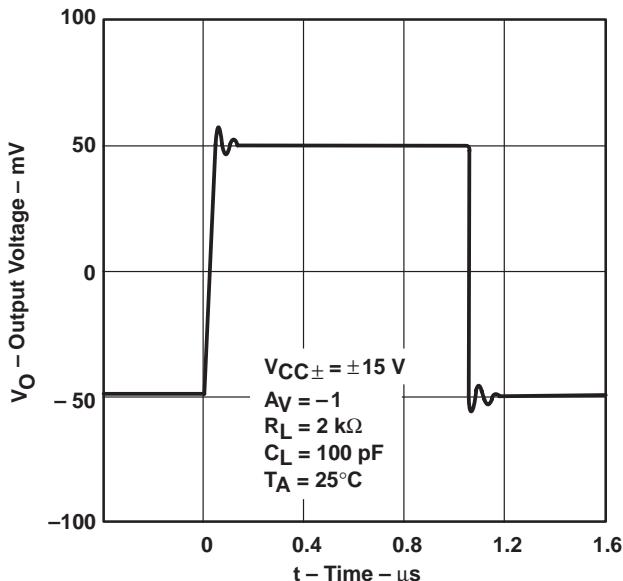


Figure 71

**CLOSED-LOOP OUTPUT IMPEDANCE
vs
FREQUENCY**

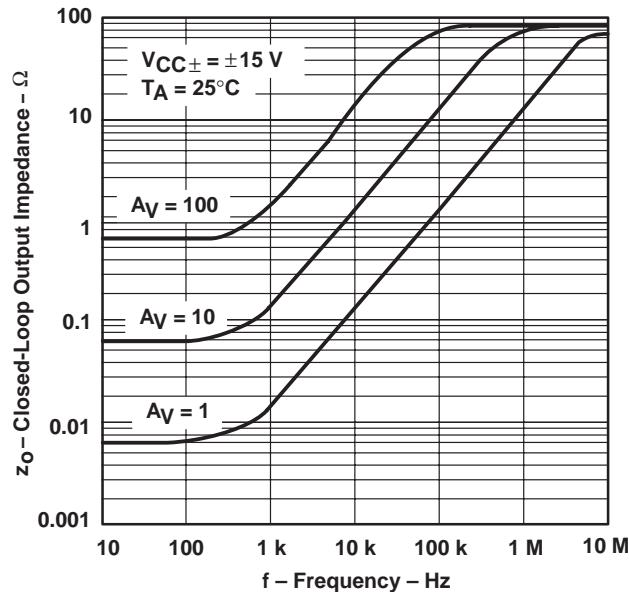


Figure 72

**TLE2082 AND TLE2084
CROSSTALK ATTENUATION
vs
FREQUENCY**

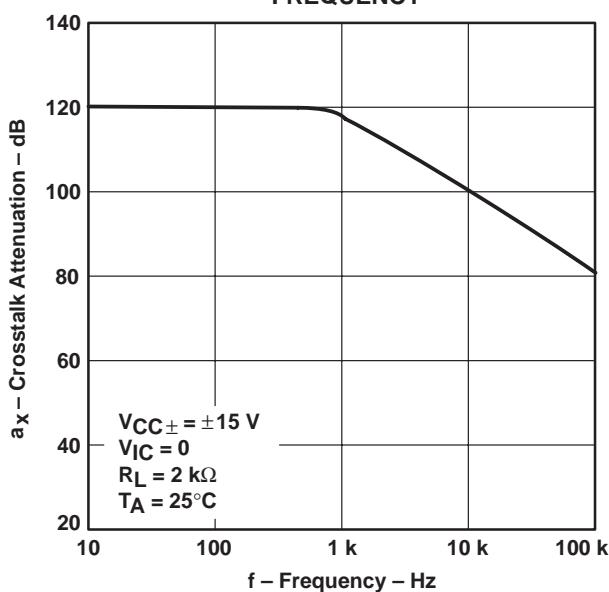


Figure 73

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TLE208x, TLE208xA, TLE208xB EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

APPLICATION INFORMATION

input characteristics

The TLE208x, TLE208xA, and TLE208xB are specified with a minimum and a maximum input voltage that if exceeded at either input could cause the device to malfunction. Because of the extremely high input impedance and resulting low bias current requirements, the TLE208x, TLE208xA, and TLE208xB are well suited for low-level signal processing; however, leakage currents on printed-circuit boards and sockets can easily exceed bias current requirements and cause degradation in system performance. It is good practice to include guard rings around inputs (see Figure 74). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.

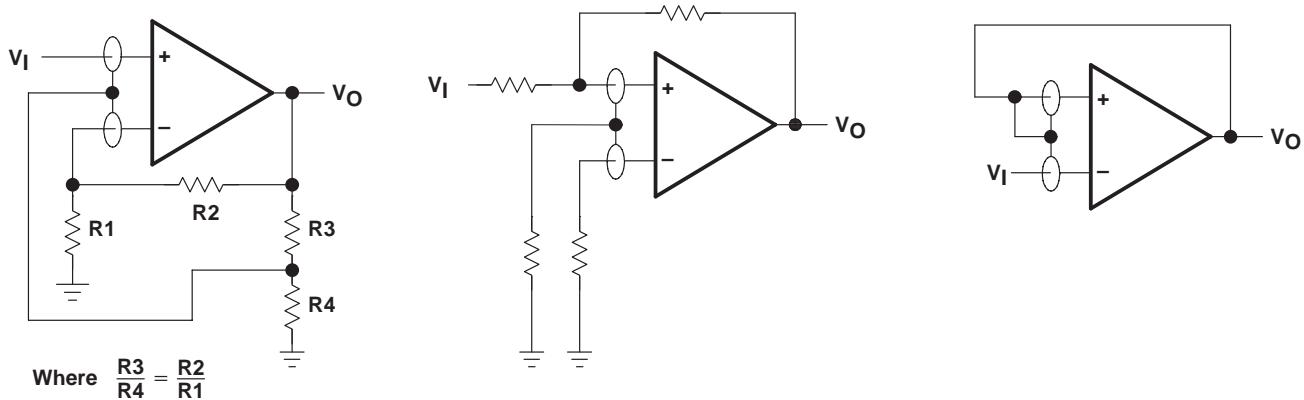


Figure 74. Use of Guard Rings

TLE2081 input offset voltage nulling

The TLE2081 series offers external null pins that can be used to further reduce the input offset voltage. The circuit of Figure 75 can be connected as shown if the feature is desired. When external nulling is not needed, the null pins may be left unconnected.

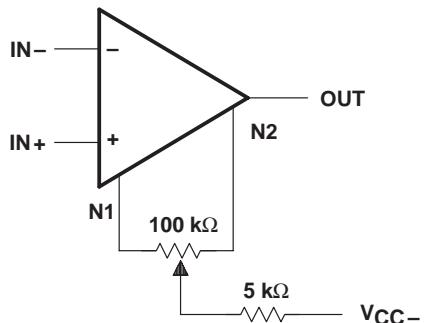


Figure 75. Input Offset Voltage Nulling

TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000


APPLICATION INFORMATION

macromodel information

Macromodel information provided was derived using *PSpice™ Parts™* model generation software. The Boyle macromodel (see Note 4) and subcircuit in Figure 58 were generated using the TLE208x typical electrical and operating characteristics at $T_A = 25^\circ\text{C}$. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 4: G.R. Boyle, B.M. Cohn, D.O. Pederson, and J.E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

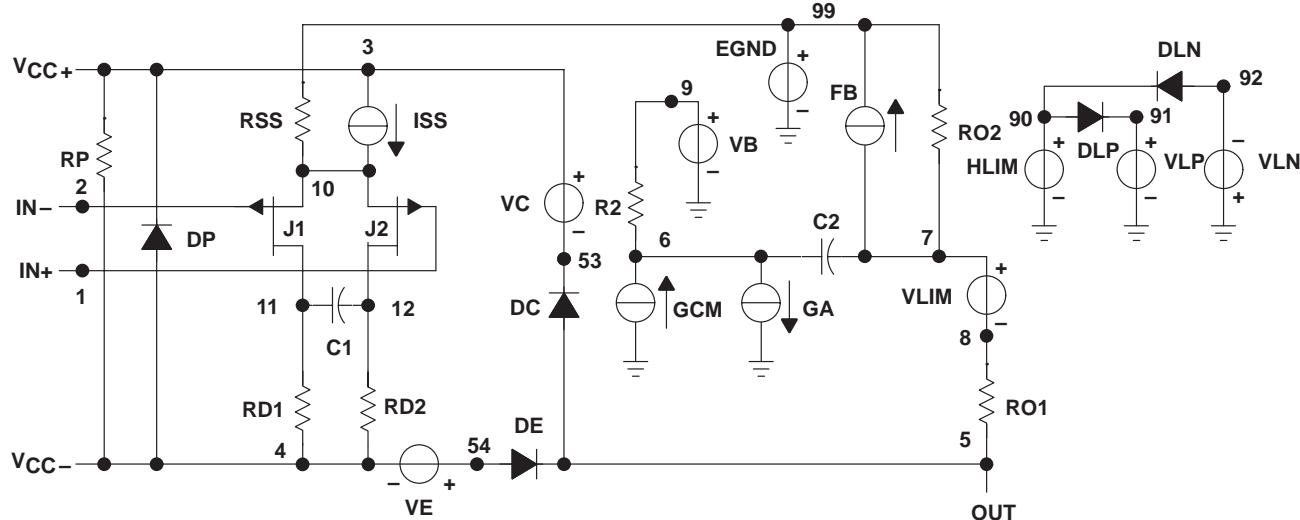

```

.SUBCKT TLE208x 1 2 3 4 5
C1 11 12 2.2E-12
C2 6 7 10.00E-12
DC 5 53 DX
DE 54 5 DX
DLP 90 91 DX
DLN 92 90 DX
DP 4 3 DX
EGND 99 0 POLY (2) (3,0) (4,0) 0 .5 .5
FB 7 99 POLY (5) VB VC VE VLP VLN 0
+ .... 5.607E6 -6E6 6E6 6E6 -6E6
GA 6 0 11 12 333.0E-6
GCM 0 6 10 99 7.43E-9
ISS 3 10 DC 400.0E-6
HLIM 90 0 VLIM 1K
J1 11 2 10 JX
J2 12 1 10 JX

```

R2	6	9	100.0E3
RD1	4	11	3.003E3
RD2	4	12	3.003E3
R01	8	5	80
R02	7	99	80
RP	3	4	27.30E3
RSS	10	99	500.0E3
VB	9	0	DC 0
VC	3	53	DC 2.20
VE	54	4	DC 2.20
VLIM	7	8	DC 0
VLP	91	0	DC 45
VLN	0	92	DC 45
.MODEL DX D (IS=800.0E-18)			
.MODEL JX PJF (IS=15.00E-12 BETA=554.5E-6			
+ VTO=-.6)			

.ENDS

Figure 76. Boyle Macromodel and Subcircuit


**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

D (R-PDSO-G)**

14 PIN SHOWN

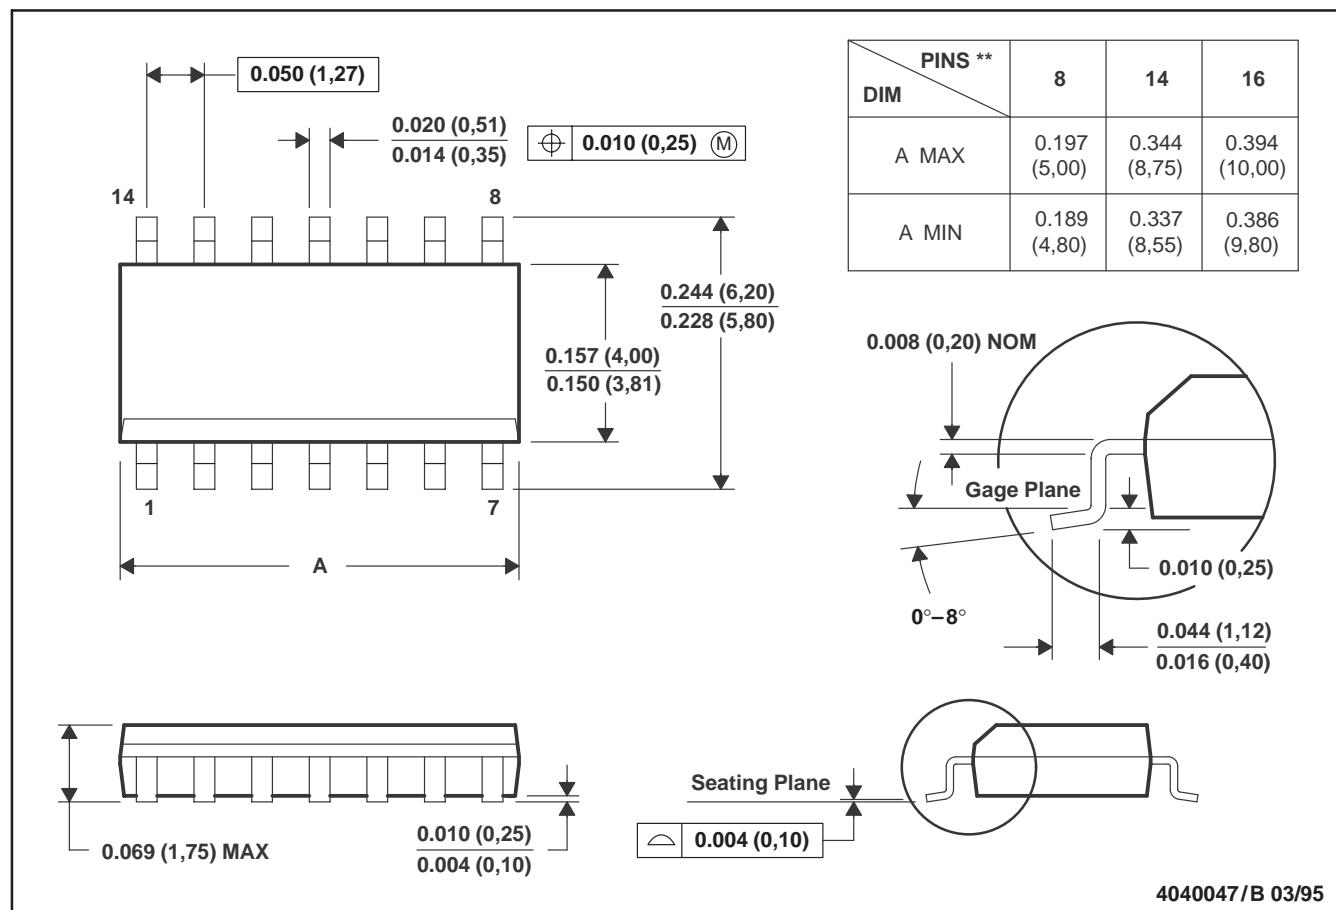

- NOTES:
- All linear dimensions are in inches (millimeters).
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).
 - Four center pins are connected to die mount pad.
 - Falls within JEDEC MS-012


TLE208x, TLE208xA, TLE208xY
**EXCALIBUR HIGH-SPEED JFET-INPUT
 OPERATIONAL AMPLIFIERS**
 SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

DW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

16 PIN SHOWN

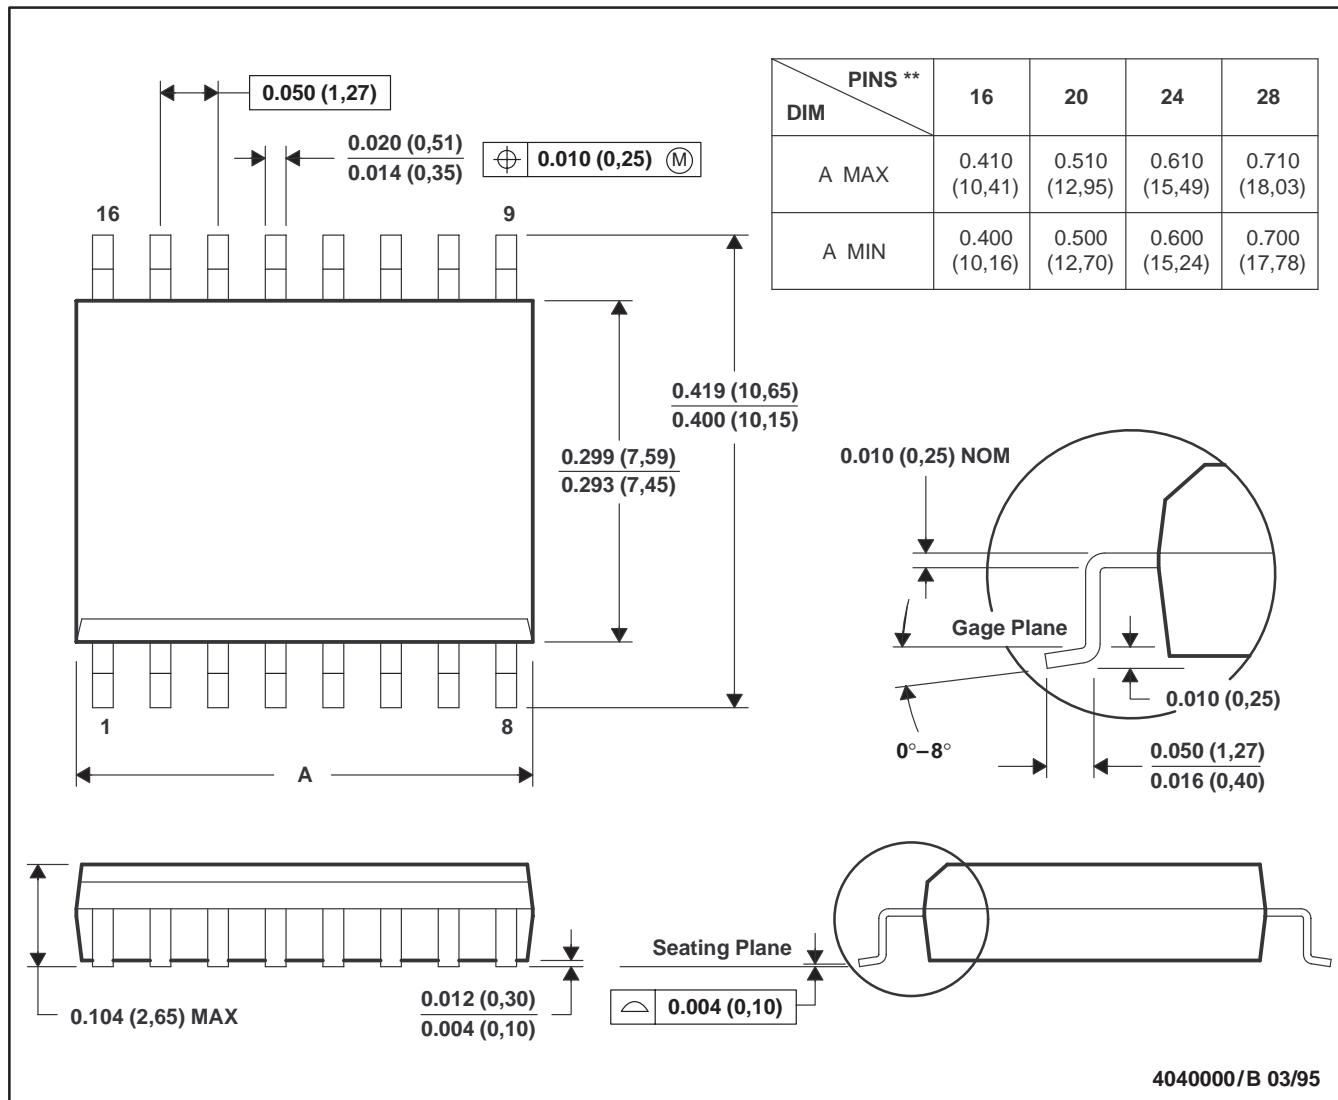

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
 D. Falls within JEDEC MS-013

**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

FK (S-CQCC-N)**

28 TERMINAL SHOWN

LEADLESS CERAMIC CHIP CARRIER

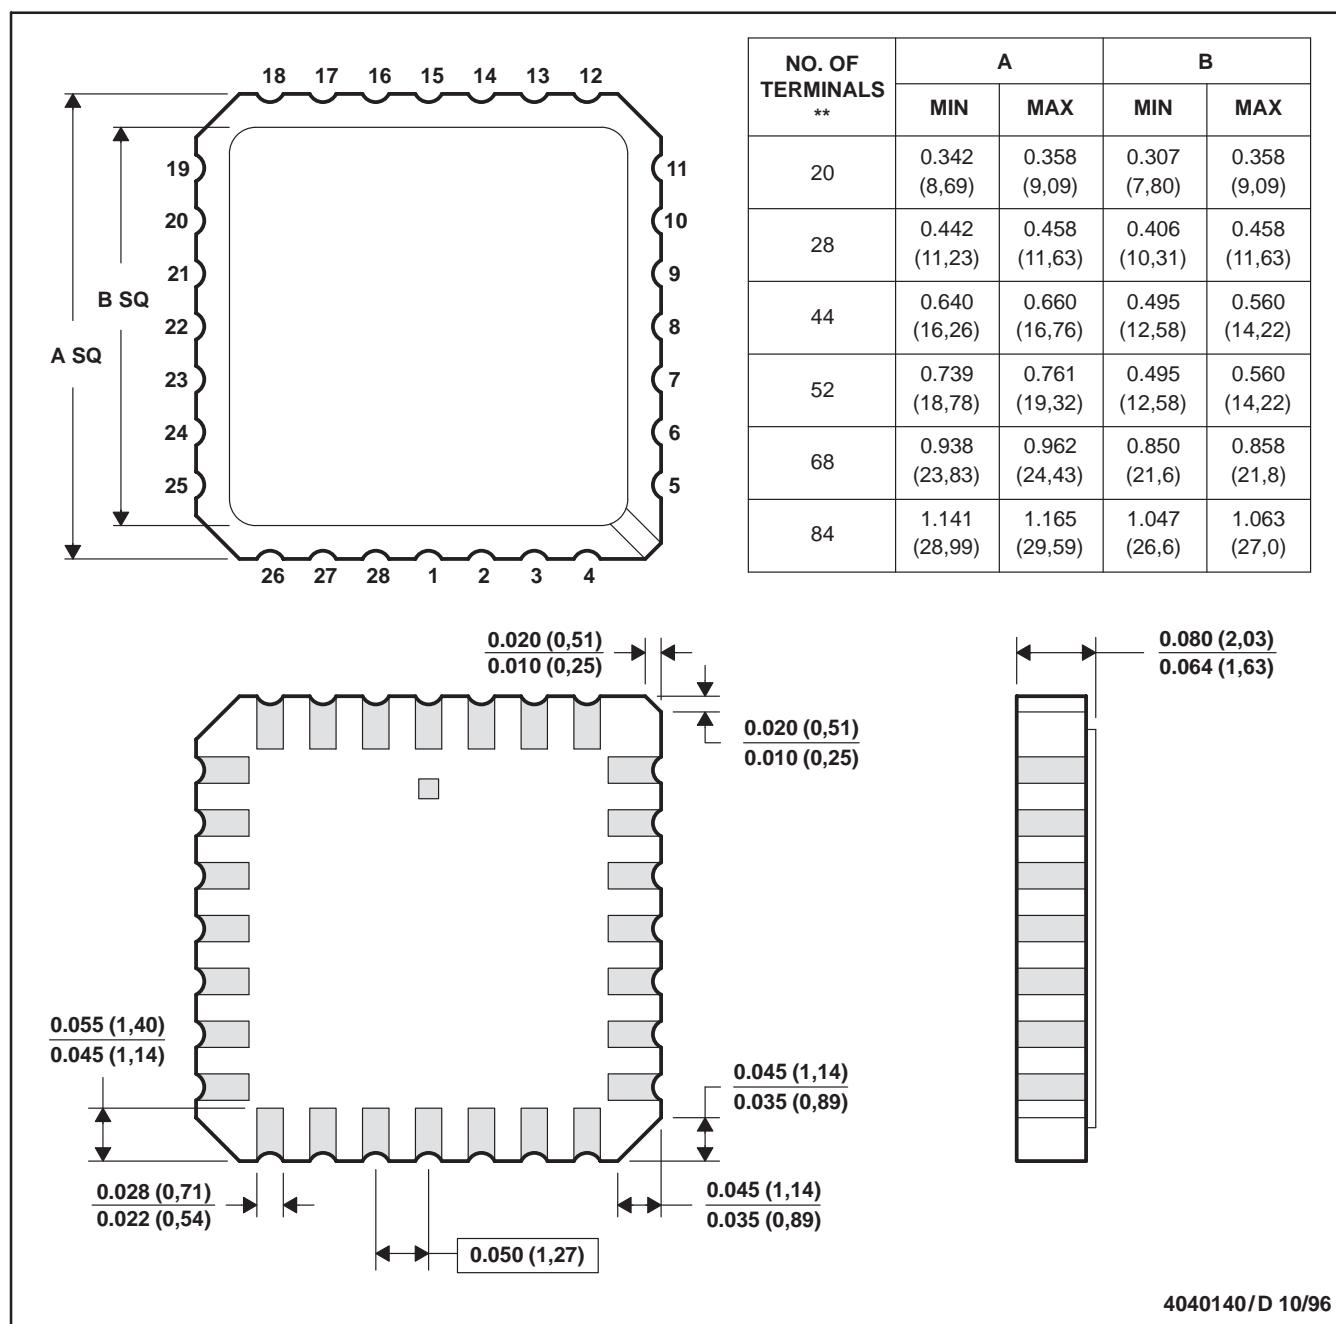

4040140/D 10/96

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. This package can be hermetically sealed with a metal lid.
 D. The terminals are gold plated.
 E. Falls within JEDEC MS-004

TLE208x, TLE208xA, TLE208xY
**EXCALIBUR HIGH-SPEED JFET-INPUT
 OPERATIONAL AMPLIFIERS**


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

J (R-GDIP-T)**

CERAMIC DUAL-IN-LINE PACKAGE

14 PIN SHOWN

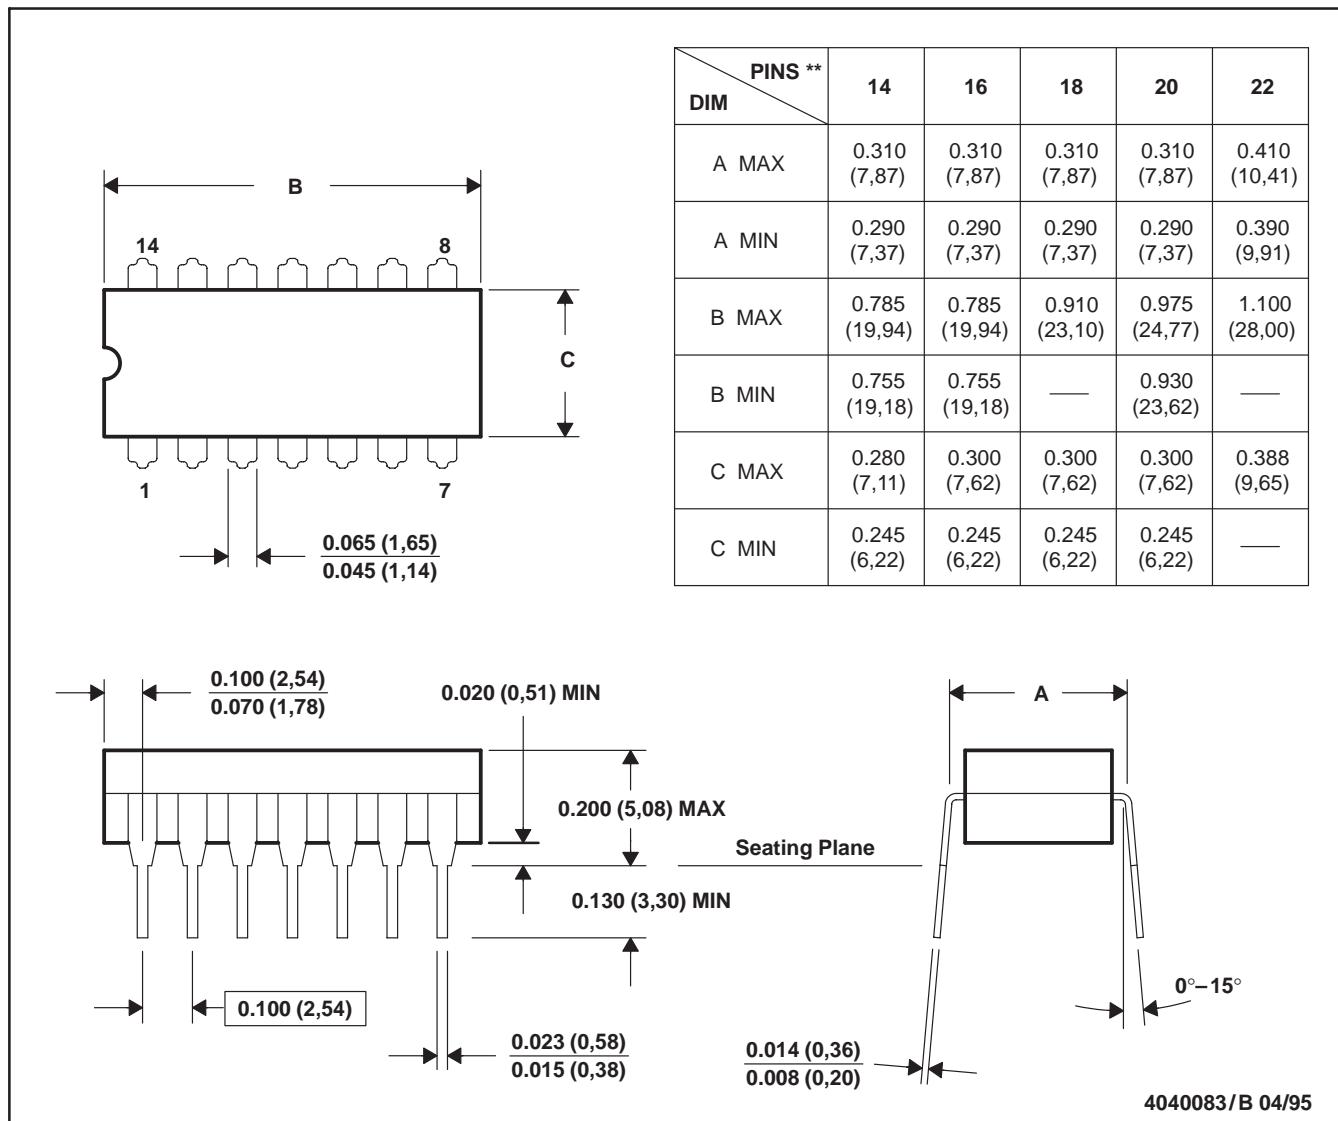

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. This package can be hermetically sealed with a ceramic lid using glass frit.
 - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
 - E. Falls within MIL-STD-1835 GDIP1-T14, GDIP1-T16, GDIP1-T18, GDIP1-T20, and GDIP1-T22


**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

JG (R-GDIP-T8)

CERAMIC DUAL-IN-LINE PACKAGE

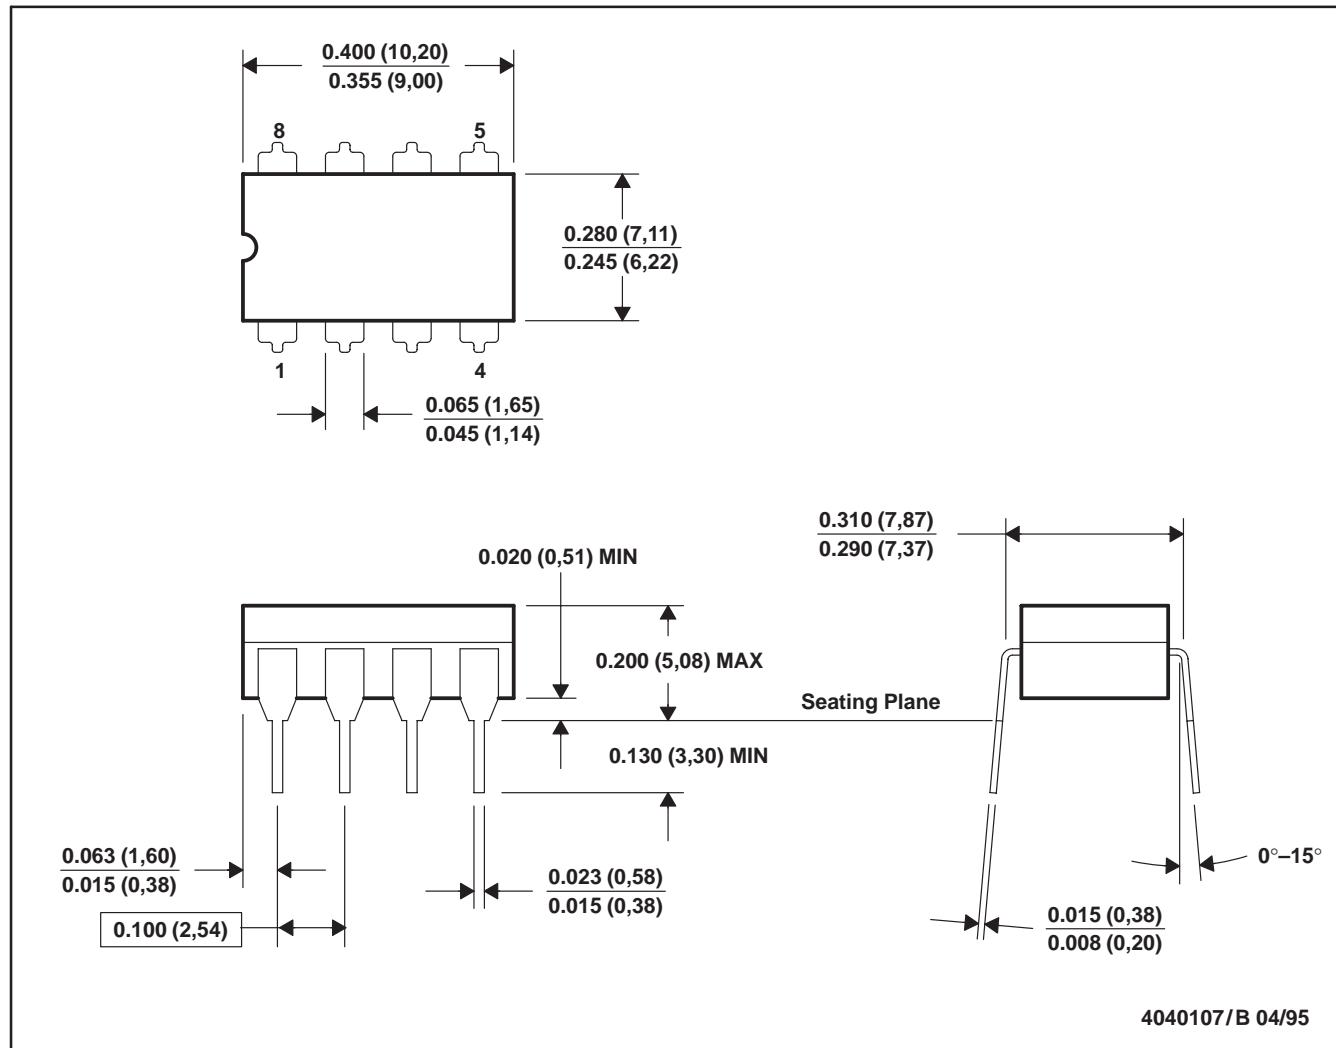

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. This package can be hermetically sealed with a ceramic lid using glass frit.
 D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
 E. Falls within MIL-STD-1835 GDIP1-T8


TLE208x, TLE208xA, TLE208xY
**EXCALIBUR HIGH-SPEED JFET-INPUT
 OPERATIONAL AMPLIFIERS**
 SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

N (R-PDIP-T)**

16 PIN SHOWN

PLASTIC DUAL-IN-LINE PACKAGE

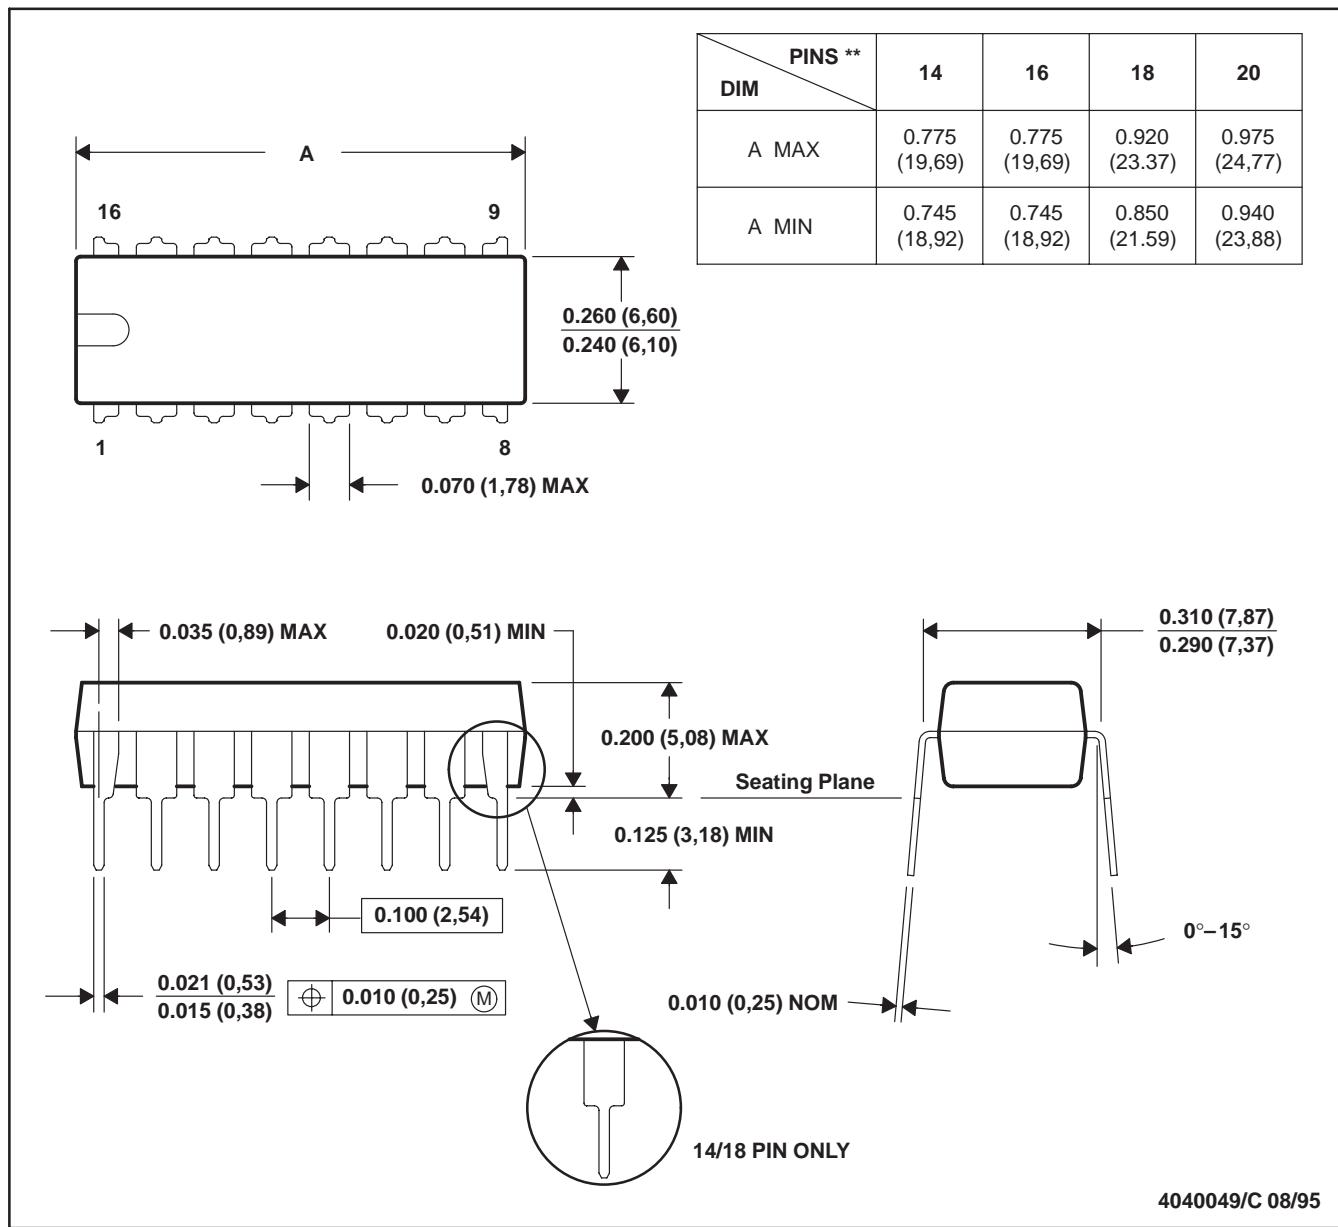

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Falls within JEDEC MS-001 (20 pin package is shorter than MS-001.)


**TLE208x, TLE208xA, TLE208xY
EXCALIBUR HIGH-SPEED JFET-INPUT
OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

MECHANICAL INFORMATION

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

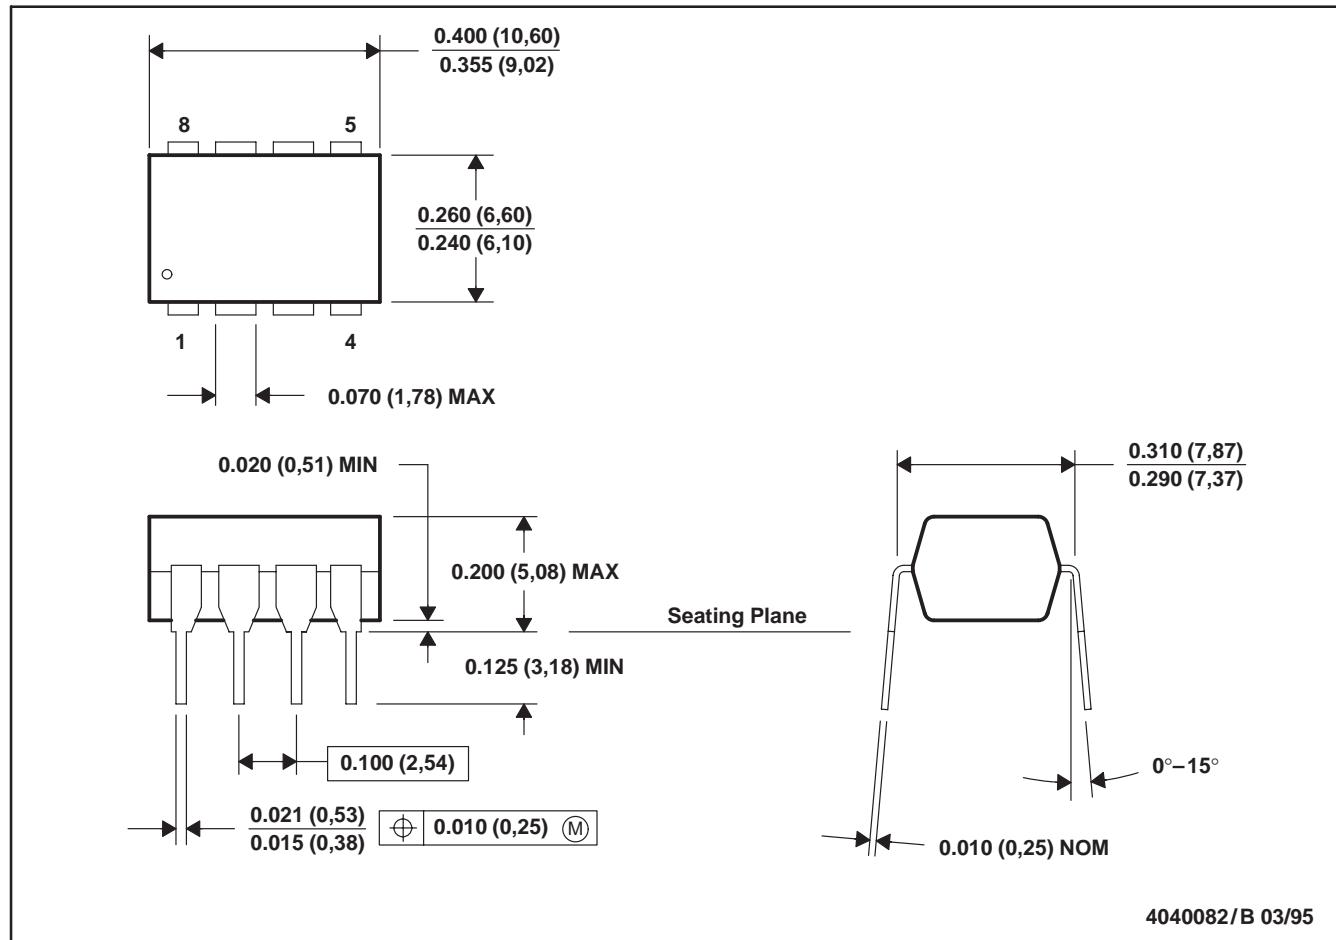

- NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS-001

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 2000, Texas Instruments Incorporated