


NAIS

MICROWAVE RELAY
FOR ATTENUATOR
CIRCUIT

RA-RELAYS



mm inch

FEATURES

1. High frequency characteristics
(Impedance 50Ω, ~1.0GHz)

- Insertion loss; Max. 0.3dB
- Isolation; Min. 20dB (Between open contacts)
Min. 30dB (Between contact sets)
- V.S.W.R.; Max. 1.2

2. Surface mount terminal

This relay is a surface-mounted model with excellent high-frequency properties. In addition, it can use a microstrip

line in the base circuit design which spares the labor of machining the base.

3. Low profile small type

9.7(W)×14.7(L)×5.9(H) mm
.382(W)×.579(L)×.232(H) inch

4. High sensitivity: 140 mW nominal operating power

5. High contact reliability

Electrical life: Min. 10⁷ (10mA 10V DC)

SPECIFICATIONS

Contact			
Arrangement		2 Form C	
Contact material		Gold-clad silver alloy	
Initial contact resistance		Max. 75mΩ	
Rating	Contact rating (resistive)	10mA 10 V DC 1A 30 V DC	
	Contact carrying power	Max. 3W(at 1.0GHz, imped- ance 50Ω, V.S.W.R. max.1.2)	
	Max. switching voltage	30 V DC	
	Max. switching current	1A	
High fre- quency character- istics (~1GHz, Imped- ance 50Ω)	Isolation	Between open con- tacts	Min. 20dB
		Between contact sets	Min. 30dB
	Insertion loss		Max. 0.3dB
	V.S.W.R.		Max. 1.2
	Input power		Max. 3W(at 1.0GHz, imped- ance 50Ω, V.S.W.R. max.1.2)
	Nominal operating power	Single side stable	
1 coil latching		70 mW (1.5 to 12V) 100mW (24V)	
2 coil latching		140mW (1.5 to 12V) 200mW (24V)	
Expected life (min. operation)	Mechanical (at 180 cpm)		10 ⁸
	Electrical (at 20 cpm)	10mA 10 V DC(resis- tive load)	10 ⁷
		1A 30 V DC (resistive load)	10 ⁵

Characteristics		
Initial insulation resistance *1		Min. 100 MΩ(at 500 V DC)
Initial breakdown voltage *2	Between open con- tacts	750 Vrms for 1 min.
	Between contact sets	1,000 Vrms for 1 min.
	Between contact and coil	1,000 Vrms for 1 min.
	Between contact and earth terminal	1,000 Vrms for 1 min.
Operate time [Set time] *3 (at 20°C)		Max. 4ms (Approx. 2ms) [Max. 4ms (Approx. 2ms)]
Release time (without diode) [Reset time] *3(at 20°C)		Max. 4ms (Approx. 1ms) [Max. 4ms (Approx. 2ms)]
Temperature rise (at 20°C) *4		Max. 60°C
Shock resistance	Functional *5	500 m/s ²
	Destructive *6	1,000 m/s ²
Vibration resistance	Functional *7	10 to 55 Hz at double amplitude of 3mm
	Destructive	10 to 55 Hz at double amplitude of 5mm
Conditions for oper- ation, transport and storage *8 (Not freezing and condensing at low temperature)	Ambient temp	−40°C to +85°C −40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 2g .07oz
Remarks		
* Specifications will vary with foreign standards certification ratings.		
*1 Measurement at same location as "Initial breakdown voltage" section.		
*2 Detection current: 10mA		
*3 Nominal operating voltage applied to the coil, excluding contact bounce time.		
*4 By resistive method, nominal voltage applied to the coil: 3W contact carrying power: at 1.0GHz, Impedance 50Ω, V.S.W.R. Max.1.2		

Remarks

* Specifications will vary with foreign standards certification ratings.

*1 Measurement at same location as "Initial breakdown voltage" section.

*2 Detection current: 10mA

*3 Nominal operating voltage applied to the coil, excluding contact bounce time.

*4 By resistive method, nominal voltage applied to the coil: 3W contact carrying power: at 1.0GHz, Impedance 50Ω, V.S.W.R. Max.1.2

*5 Half-wave pulse of sine wave: 11ms, detection time: 10μs.

*6 Half-wave pulse of sine wave: 6ms

*7 Detection time: 10μs

*8 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61)

TYPICAL APPLICATIONS

- Measurement instruments
Oscilloscope attenuator circuit

ORDERING INFORMATION

Ex. A RA 2 0 0 A 03					
Product name	Contact arrangement	Operating function	Type of operation	Terminal shape	Coil voltage, V DC
RA	2: 2 Form C	0: Single side stable 1: 1 coil latching 2: 2 coil latching	0: Standard type (B.B.M)	A: Surface-mount terminal	1H: 1.5 09: 9 03: 3 12: 12 4H: 4.5 24: 24 05: 5 48: 48 06: 6

Note: Standard packing; Carton: 40 pcs. Case 1,000 pcs.



TYPES ANE COIL DATA (at 20°C 68°F)

• Single side stable type

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.) (initial)	Drop-out voltage, V DC (min.)(initial)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating current, mA ($\pm 10\%$)	Nominal operating power, mW	Max. allowable voltage, V DC
ARA200A1H	1.5	1.125	0.15	16	93.8	140	2.25
ARA200A03	3	2.25	0.3	64.3	46.7	140	4.5
ARA200A4H	4.5	3.375	0.45	145	31	140	6.75
ARA200A05	5	3.75	0.5	178	28.1	140	7.5
ARA200A06	6	4.5	0.6	257	23.3	140	9
ARA200A09	9	6.75	0.9	579	15.5	140	13.5
ARA200A12	12	9	1.2	1,028	11.7	140	18
ARA200A24	24	18	2.4	2,880	8.3	200	36
ARA200A48	48	36	4.8	7,680	6.3	300	57.6

• 1 coil latching type

Part No.	Nominal voltage, V DC	Set voltage, V DC (max.) (initial)	Reset voltage, V DC (max.) (initial)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating current, mA ($\pm 10\%$)	Nominal operating power, mW	Max. allowable voltage, V DC
ARA210A1H	1.5	1.125	1.125	32	46.9	70	2.25
ARA210A03	3	2.25	2.25	128.6	23.3	70	4.5
ARA210A4H	4.5	3.375	3.375	289.3	15.6	70	6.75
ARA210A05	5	3.75	3.75	357	14	70	7.5
ARA210A06	6	4.5	4.5	514	11.7	70	9
ARA210A09	9	6.75	6.75	1,157	7.8	70	13.5
ARA210A12	12	9	9	2,057	5.8	70	18
ARA210A24	24	18	18	5,760	4.2	100	36



• 2 coil latching type

Part No.	Nominal voltage, V DC	Set voltage, V DC (max.) (initial)	Reset voltage, V DC (max.) (initial)	Coil resistance, Ω ($\pm 10\%$)	Nominal operating current, mA ($\pm 10\%$)	Nominal operating power, mW	Max. allowable voltage, V DC
ARA220A1H	1.5	1.125	1.125	16	93.8	140	2.25
ARA220A03	3	2.25	2.25	64.3	46.7	140	4.5
ARA220A4H	4.5	3.375	3.375	145	31	140	6.75
ARA220A05	5	3.75	3.75	178	28.1	140	7.5
ARA220A06	6	4.5	4.5	257	23.3	140	9
ARA220A09	9	6.75	6.75	579	15.5	140	13.5
ARA220A12	12	9	9	1,028	11.7	140	18
ARA220A24	24	18	18	2,880	8.3	200	36

DIMENSIONS


mm inch

Suggested Mounting Pads (Top view)

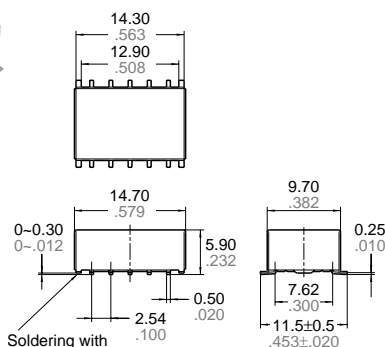


Soldering with
PC board earth
(4 ribs)


Single side stable



1 coil latching




2 coil latching



Tolerance: $\pm 0.1 \pm .004$


Schematic (Top view)

Single side stable




(Deenergized condition)

1 coil latching



(Reset condition)

2 coil latching



(Reset condition)


REFERENCE DATA

1. High frequency characteristics


Sample: ARA200A12

Measuring method: Measured with HP network analyzer (HP8753C).


• Insertion loss

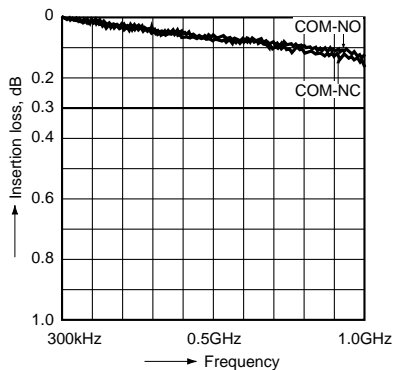

• Isolation

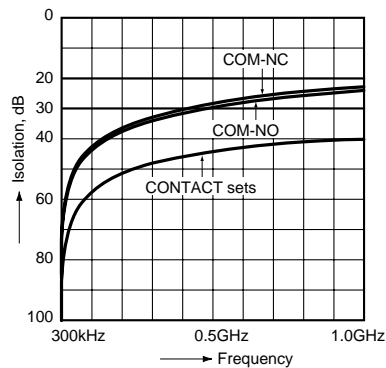

• V.S.W.R.

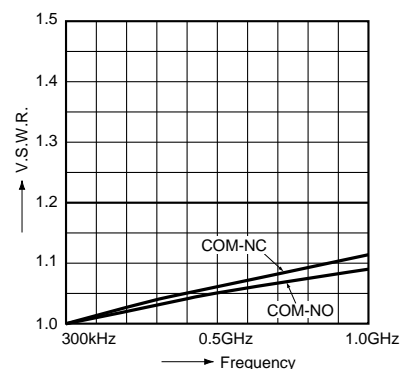

NOTES

1. Coil operating power

Pure DC current should be applied to the coil. The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5%.

However, check it with the actual circuit since the characteristics may be slightly different. The nominal operating voltage should be applied to the coil for more than 10 ms to set/reset the latching type relay.

2. Coil connection

When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

3. External magnetic field

Since RA relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

4. Cleaning

For automatic cleaning, the boiling method is recommended. Avoid ultrasonic cleaning which subjects the relays to high frequency vibrations, which may cause the contacts to stick.

It is recommended that alcoholic solvents be used.

5. Soldering

Manual soldering shall be performed under following condition.


Tip temperature: 280°C to 300°C .536°F to 572°F

Wattage: 30 to 60W


Soldering time: within 5s

In case of automatic soldering, the following conditions should be observed

1) Position of measuring temperature

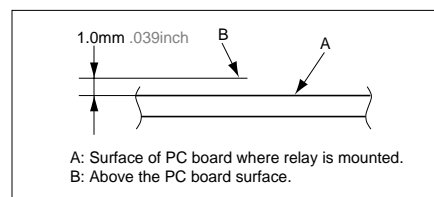

2) IR (infrared reflow) soldering method

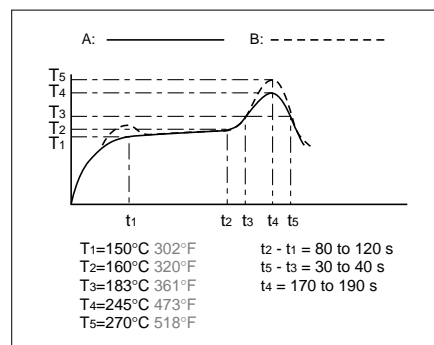

Temperature rise of relay itself may vary according to the mounting level or the heating method of reflow equipment. Therefore, please set the temperature of soldering portion of relay terminal and the top surface of the relay case not to exceed the above mentioned soldering condition.

It is recommended to check the temperature rise of each portion under actual mounting condition before use.

The soldering earth shall be performed by manual soldering.

For Cautions for Use, see Relay Technical Information (Page 48 to 76).