

Chassis Mounted Filters - Single Stage

查询RES5-F03供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货

Available in 5 current ratings from 3 to 15 amp these chassis mounted filters have a good performance for both common mode and differential mode interference.

Meets with the requirement of UL 1283 and overvoltage category II of IEC 664.






Typical applications are communications equipment, measuring and testing instruments, industrial equipments such as UPS, inverters, converters, printers, copiers and fax machines.

Approvals:



Rated Voltage: 250VAC
Frequency: 50/60Hz
Temperature Range: -25°C ~ +85°C

Insertion Loss Curves

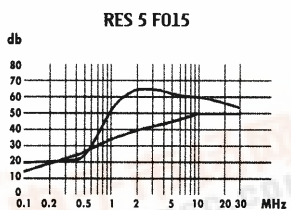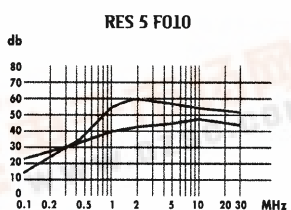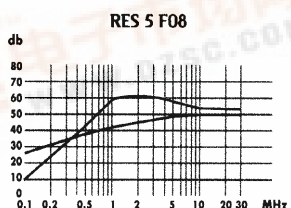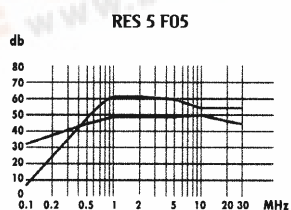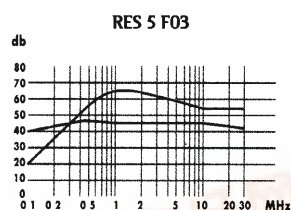


■ Common Mode
■ Differential Mode


Technical Data



Dimensions

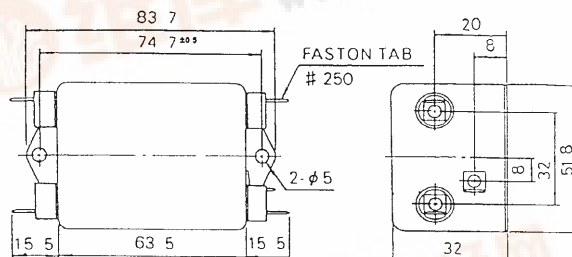

Electrical Schematic

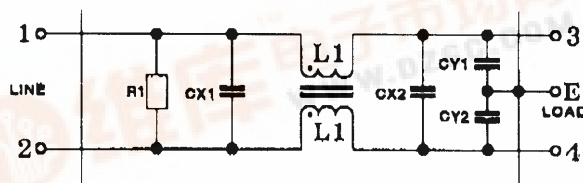

Type	Current @ 40°C	Max leakage current @ 250V AC 50HZ	Terminations
RES 5 F03	3A	0.5mA	Faston Tags
RES 5 F05	5A	0.5mA	Faston Tags
RES 5 F08	8A	0.5mA	Faston Tags
RES 5 F010	10A	0.5mA	Faston Tags
RES 5 F015	15A	0.5mA	Faston Tags