



1N1183, 1N3765, 1N1183A, 1N2128A SERIES

35, 40 and 60 Amp Power Silicon Rectifier Diodes

Major Ratings and Characteristics



	1N1183	1N3765	1N1183A	1N2128A	Units
$I_{F(AV)}$	35*	35*	40*	60*	A
@ Max. T _C	140*	140*	150*	140*	°C
I_{FSM}					A
@ 50 Hz	480	380	765	860	
@ 60 Hz	500*	400*	800*	900*	
t^2_t					A ² s
@ 50 Hz	1140	730	2900	3700	
@ 60 Hz	1040	670	2650	3400	
$I^2_{T^2}$	16 100	10 300	41 000	52 500	A ² √s
V _{RRM} Range	50* to 800*	700* to 1000*	50* to 600*	50* to 600*	V

*JEDEC registered values.

Description and Features

- Low leakage current series
- Good surge current capability up to 1000 amps
- Can be supplied to meet stringent military, aerospace and other high-reliability requirements.

CASE STYLE AND DIMENSIONS

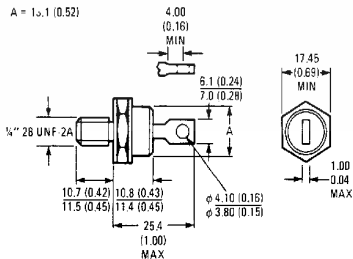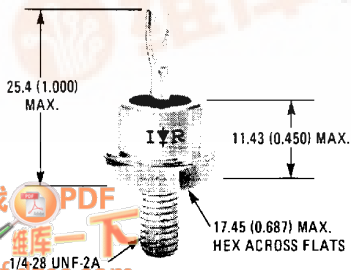

VOLTAGE RATINGS

Part Number ①			V_{RRM} - Max. Repetitive Peak Reverse Voltage (V)	V_R - Max. Direct Reverse Voltage (V)
			$T_C = -65^\circ\text{C}$ to 200°C ②	$T_C = -65^\circ\text{C}$ to 200°C ②
1N1183	1N1183A	1N2128A	50*	50*
1N1184	1N1184A	1N2129A	100*	100*
1N1185	1N1185A	1N2130A	150*	150*
1N1186	1N1186A	1N2131A	200*	200*
1N1187	1N1187A	1N2133A	300*	300*
1N1188	1N1188A	1N2135A	400*	400*
1N1189	1N1189A	1N2137A	500*	500*
1N1190	1N1190A	1N2138A	600*	600*
1N3765			700*	700*
1N3766			800*	800*
1N3767			900*	900*
1N3768			1000*	1000*


ELECTRICAL SPECIFICATIONS

	1N1183	1N3765	1N1183A	1N2128A	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Max. T_C	35*	35*	40*	60*	A	1-phase operation, 180° conduction
	140*	140*	150*	140*	°C	
I_{FSM} Max. peak one-cycle non-repetitive surge current	480	380	765	860	A	Half cycle 50 Hz sine wave or 6 ms rectangular pulse
	500*	400*	800*	900*		Half cycle 60 Hz sine wave or 5 ms rectangular pulse
	570	455	910	1000	A	Half cycle 50 Hz sine wave or 6 ms rectangular pulse
	595	475	950	1050		Half cycle 60 Hz sine wave or 5 ms rectangular pulse
i^2t Max. i^2t for fusing	1140	730	2900	3700	A ² s	$t = 10\text{ms}$ With rated V_{RRM} applied following
	1040	670	2650	3400		$t = 8.3\text{ms}$ surge, initial $T_J = T_J$ max.
	1610	1030	4150	5250		$t = 10\text{ms}$ With $V_{RRM} = 0$ following surge,
	1470	940	3750	4750		$t = 8.3\text{ms}$ initial $T_J = T_J$ Max.
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for individual device fusing ③	16 100	10 300	41 500	52 500	A ² \sqrt{s}	$t = 0.1$ to 10 ms, $V_{RRM} = 0$ following surge.
V_{FM} Max. peak forward voltage @ I_{FM}	1.7*	1.8*	1.3*	1.3*	V	$T_J = 25^\circ\text{C}$
	110	110	126	188	A	
$I_{R(AV)}$ Max. average reverse current	—	5.0*	—	—	mA	Max. rated $I_{F(AV)}$ and T_C , $V_{RRM} = 700\text{V}$ 800V 900V 1000V
	—	4.0*	—	—		
	—	3.0*	—	—		
	—	2.0*	—	—		
	10*	—	2.5*	10*		

① Basic part number indicates cathode-to-case. For anode-to-case, add "R" to part number, i.e., 1N1188R, 1N3766R, 1N1188RA, 1N2135RA

② For 1N1183 series and 1N3765 series $T_C = -65$ to 190°C .③ i^2t for $t_x = I^2\sqrt{t} \cdot \sqrt{t_x}$.

* JEDEC registered values.



rated load
with rated
d.

rated load
with 1/2
d following

wing

3,

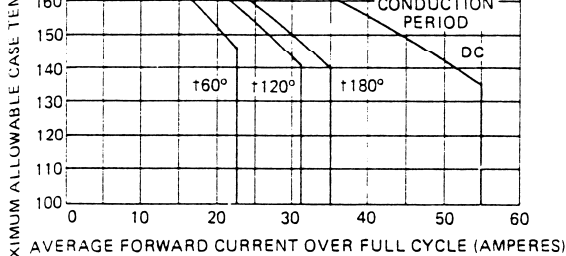





Fig. 1 - Maximum Allowable Case Temperature Vs. Average Forward Current, 1N1183 and 1N3765 Series




Fig. 2 - Typical Loss Vs. Average Current Waveform

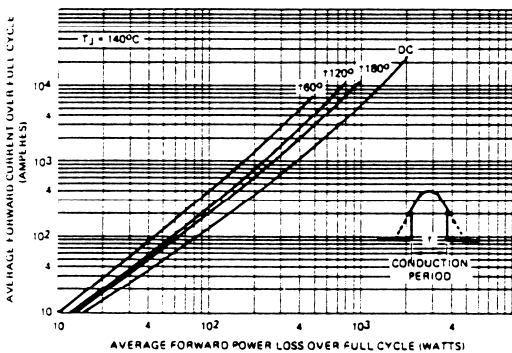


Fig. 3 - Typical High Level Forward Power Loss Vs. Average Forward Current (Sinusoidal Current Waveform), 1N1183 and 1N3765 Series

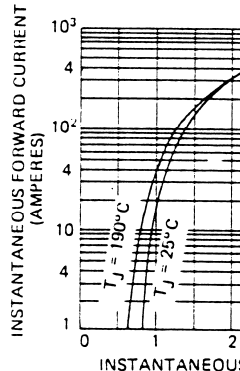


Fig. 4 - Typical Forward Current Vs. Instantaneous Power Loss, 1N1183 and 1N3765 Series

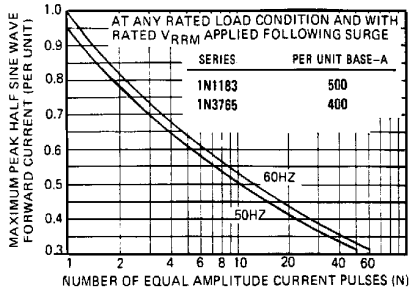


Fig. 5 - Maximum Non-Repetitive Surge Current Vs. Number of Current Pulses, 1N1183 and 1N3765 Series

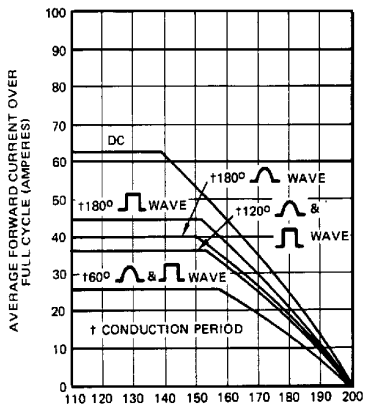


Fig. 6 - Average Forward Current Vs. Maximum Allowable Case Temperature, 1N1183A Series


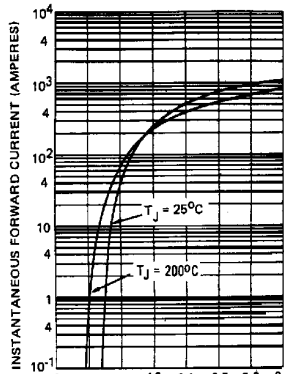



Fig. 7 - Maximum Low Level Forward Power Loss Vs. Average Forward Current, 1N1183A Series



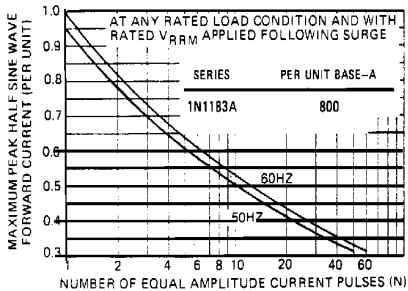


Fig. 10 – Maximum Non-Repetitive Surge Current Vs. Number of Current Pulses, 1N1183A Series

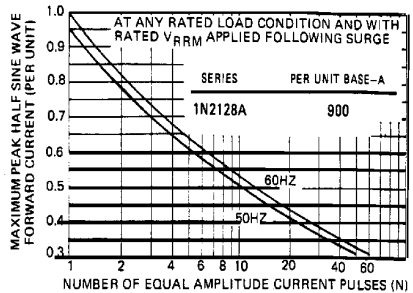


Fig. 11 – Maximum Non-Repetitive Surge Current Vs. Number of Current Pulses, 1N2128A Series

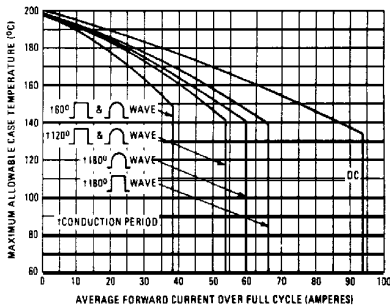


Fig. 12 – Maximum Allowable Case Temperature Vs. Average Forward Current, 1N2128A Series

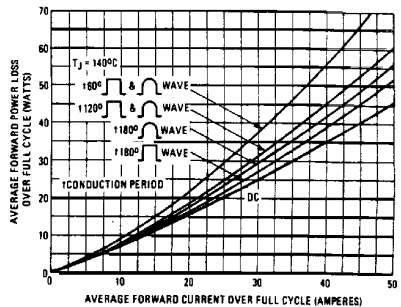


Fig. 13 – Maximum Low Level Forward Power Loss Vs. Average Forward Current, 1N2128A Series

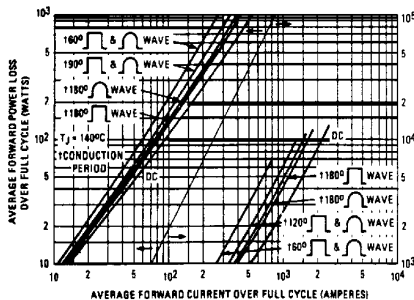


Fig. 14 – Maximum High Level Forward Power Loss Vs. Average Forward Current, 1N2128A Series

