



1N4001G THRU 1N4007G, BY133G

GLASS PASSIVATED JUNCTION RECTIFIER


Reverse Voltage - 50 to 1300 Volts

Forward Current - 1.0 Ampere

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Glass passivated cavity-free junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.0 ampere operation at $T_A=75^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1 \mu\text{A}$
- High temperature soldering guaranteed:
350°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3Kg) tension

DO-41

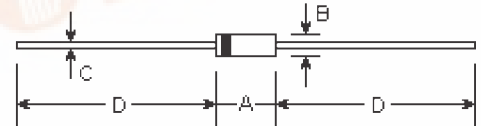

Mechanical Data

- **Case:** DO-41 molded plastic over glass body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.012 ounce, 0.335 gram

DIMENSIONS					
DIM	inches		mm		Note
	Min.	Max.	Min.	Max.	
A	0.165	0.205	4.2	5.2	
B	0.079	0.106	2.0	2.7	φ
C	0.028	0.034	0.71	0.86	φ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	1N 4001G	1N 4002G	1N 4003G	1N 4004G	1N 4005G	1N 4006G	1N 4007G	BY 133G	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1300	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	910	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1300	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0								Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method)	I_{FSM}	30.0								Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.1								Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	5.0 50.0								μA
Typical reverse recovery time (Note 1)	T_{rr}	2.0								μs
Typical junction capacitance (Note 2)	C_J	8.0								pF
Typical thermal resistance (Note 3)	R_{JA} R_{JL}	55.0 25.0								$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175								$^\circ\text{C}$

Notes:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_L=0.25\text{A}$

(2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



找PDF
pdf.dzsc.com

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD CURRENT DERATING CURVE

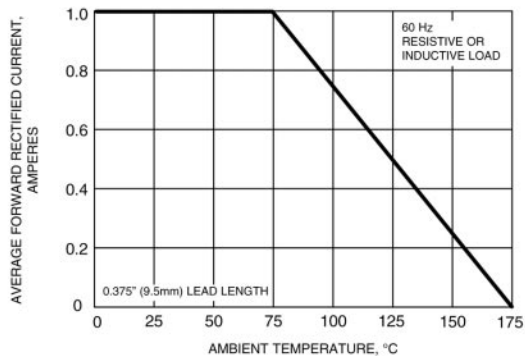


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

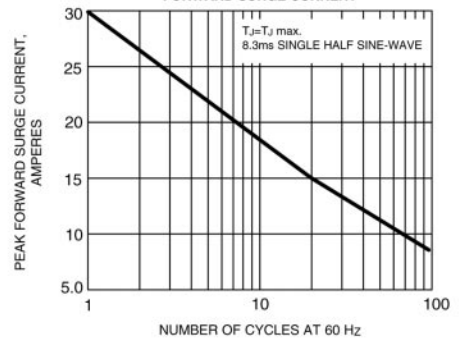


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

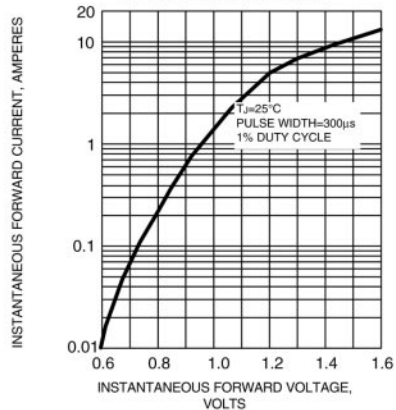


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

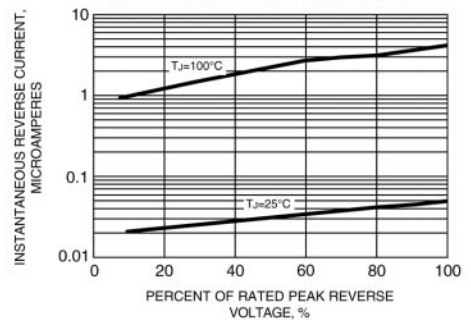


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

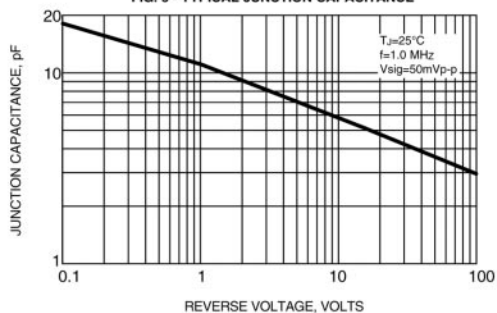


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

