



# DG2747/DG2748/DG2749

Vishay Siliconix

## 0.4-Ω, Low Voltage, Dual SPST Analog Switch

### DESCRIPTION

The DG2747, DG2748, and DG2749 are high performance, low on-resistance analog switches of dual SPST configuration.

Built on Vishay Siliconix's sub-micro CMOS technology, the DG2747/2748/2749 achieve switch on-resistance of 0.4 Ω at 2.7 V  $V_{+}$  and 0.3 Ω at 4.3 V  $V_{+}$ . It provides 0.1 Ω flatness at 2.7 V  $V_{+}$ , and total harmonic distortion to 0.03 % (frequency range 20 Hz to 20 kHz). It achieves - 72 dB off-isolation and - 100 dB crosstalk at 100 kHz. Its - 3 dB bandwidth is up to 78 MHz.

It can switch signals with amplitudes of up to  $V_{CC}$  to be transmitted in either direction.

The select pins of the control logic can tolerate voltages above  $V_{+}$ . Logic high is 1.4 V to make it compatible with many low voltage digital control circuits.

Combining wide operation voltage, low power, high speed, low on-resistance and small physical size, the DG2747/2748/2749 are ideal for portable and battery powered applications requiring high performance and efficient use of board space.

The DG2747/2748/2749 come in a small miniQFN8lead package (1.4 x 1.4 x 0.55 mm). As a committed partner to the community and the environment, Vishay Siliconix manufactures this product with the lead (Pb)-free device terminations and is 100 % RoHS compliant.

### FEATURES

- Wide operation voltage range: 1.6 V to 4.3 V
- Low on-resistance: 0.4 Ω typ. at 2.7 V
- Low voltage logic threshold:  
 $V_{th(high)} = 1.4$  V at  $V_{+} = 3$  V
- - 100 dB crosstalk
- > 250 mA latch up current per JESD78
- Switch exceeds 7 kV ESD/HBM



RoHS  
COMPLIANT




### BENEFITS

- Ultra small miniQFN8 package of 1.4 x 1.4 x 0.55 mm
- High fidelity audio switch
- Reed relay replacement
- Low power consumption

### APPLICATIONS

- Cellular phones
- Portable media player
- GPS
- PCMCIA cards
- Medical and test equipment

### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

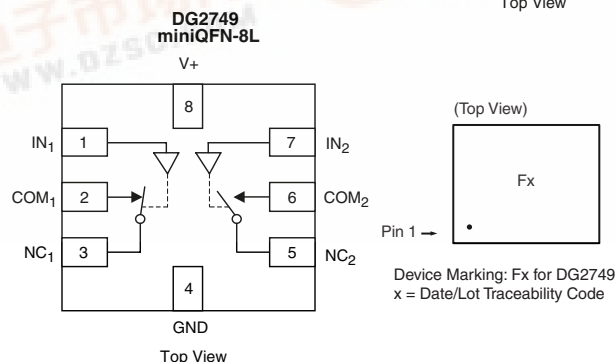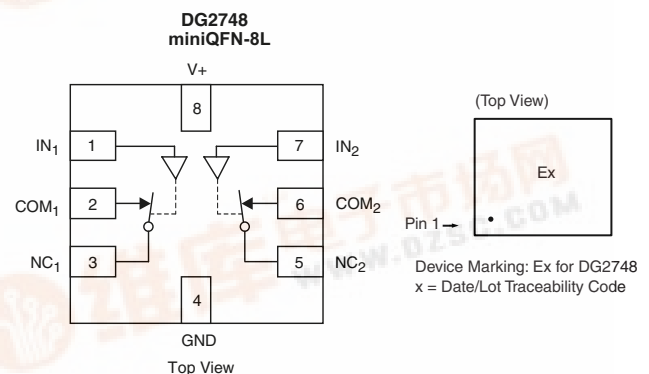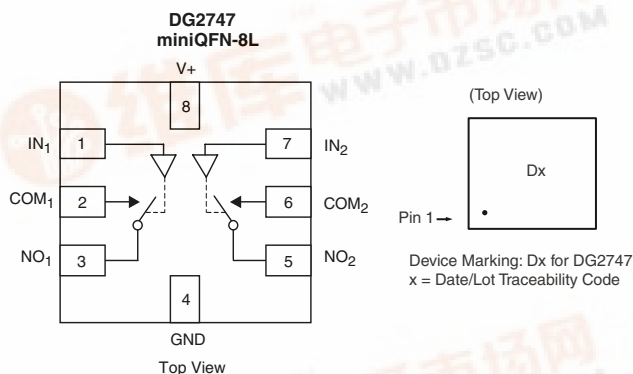

# DG2747/DG2748/DG2749

Vishay Siliconix



## TRUTH TABLE

Logic	DG2747		DG2748		DG2749	
	COM <sub>1</sub> and NO <sub>1</sub>	COM <sub>2</sub> and NO <sub>2</sub>	COM <sub>1</sub> and NC <sub>1</sub>	COM <sub>2</sub> and NC <sub>2</sub>	COM <sub>1</sub> and NC <sub>1</sub>	COM <sub>2</sub> and NO <sub>2</sub>
Low	OFF	OFF	ON	ON	ON	OFF
High	ON	ON	OFF	OFF	OFF	ON

## ORDERING INFORMATION

Temp. Range	Package	Part Number
- 40 °C to 85°C	miniQFN-8L	DG2747DN-T1-E4 DG2748DN-T1-E4 DG2749DN-T1-E4

## ABSOLUTE MAXIMUM RATINGS $T_A = 25\text{ °C}$ , unless otherwise noted

Parameter		Limit	Unit
Reference to GND	V+	- 0.3 to 5.0	V
	IN, COM, NC, NO <sup>a</sup>	- 0.3 to (V+ + 0.3)	
Current (Any terminal except NO, NC or COM)		30	mA
Continuous Current (NO, NC, or COM)		± 300	
Peak Current (Pulsed at 1 ms, 10 % duty cycle)		± 500	
Storage Temperature (D Suffix)		- 65 to 150	°C
Power Dissipation (Packages) <sup>b</sup>	miniQFN-8L <sup>c</sup>	190	mW

Notes:

a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC board.

c. Derate 2.4 mW/°C above 70 °C.



# DG2747/DG2748/DG2749

Vishay Siliconix

SPECIFICATIONS V+ = 3 V							
Parameter	Symbol	Test Conditions Unless Otherwise Specified V+ = 3 V, ± 10 %,V <sub>IN</sub> = 0.4 V or 1.4 V <sup>e</sup>	Temp. <sup>a</sup>	Limits - 40 to 85 °C			Unit
				Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	
Analog Switch							
Analog Signal Range <sup>d</sup>	V <sub>analog</sub>	R <sub>DS(on)</sub>	Full	0		V+	V
On-Resistance	R <sub>DS(on)</sub>	V+ = 2.7 V, I <sub>NO/NC</sub> = 100 mA, V <sub>COM</sub> = 0.5 V	Room		0.4	0.6	Ω
		V+ = 2.7 V, I <sub>NO/NC</sub> = 100 mA, V <sub>COM</sub> = 1.5 V					
		V+ = 2.7 V, I <sub>NO/NC</sub> = 100 mA, V <sub>COM</sub> = 0.5 V	Full			0.7	
		V+ = 2.7 V, I <sub>NO/NC</sub> = 100 mA, V <sub>COM</sub> = 1.5 V					
R <sub>ON</sub> Match <sup>d</sup>	ΔR <sub>ON</sub>	V+ = 2.7 V, I <sub>NO/NC</sub> = 100 mA, V <sub>COM</sub> = 0.5 V, 1.5 V	Room			0.03	
R <sub>ON</sub> Resistance Flatness <sup>d</sup>	R <sub>ON</sub> flatness	V+ = 2.7 V, I <sub>NO/NC</sub> = 100 mA, V <sub>COM</sub> = 0.5 V, 1.5 V	Room		0.1	0.2	
Switch Off Leakage Current	I <sub>NO/NC(off)</sub>	V+ = 4.3 V, V <sub>NO/NC</sub> = 1.0 V/3.3 V, V <sub>COM</sub> = 3.3 V/1.0 V	Room	- 2		2	nA
			Full	- 10		10	
	I <sub>COM(off)</sub>		Room	- 2		2	
			Full	- 10		10	
Channel-On Leakage Current	I <sub>COM(on)</sub>	V+ = 4.3 V, V <sub>NO/NC</sub> = V <sub>COM</sub> = 3.3 V/1.0 V	Room	- 2		2	
			Full	- 10		10	
Digital Control							
Input High Voltage	V <sub>INH</sub>		Full	1.4			V
Input Low Voltage	V <sub>INL</sub>		Full			0.4	
Input Current	I <sub>INL</sub> or I <sub>INH</sub>	V <sub>IN</sub> = 0 or V+	Full	- 1		1	μA
Dynamic Characteristics							
Turn-On Time <sup>e</sup>	t <sub>ON</sub>	V+ = 2.7 V to 3.6 V, V <sub>NO</sub> or V <sub>NC</sub> = 1.5 V, R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF	Room		14	25	ns
			Full			27	
Turn-Off Time <sup>e</sup>	t <sub>OFF</sub>		Room		12	25	
			Full			27	
Charge Injection <sup>d</sup>	Q	C <sub>L</sub> = 1 nF, R <sub>GEN</sub> = 0 Ω, V <sub>GEN</sub> = 0 V	Room		10		pC
Off-Isolation <sup>d</sup>	O <sub>IRR</sub>	R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 1 MHz	Room		- 52		dB
		R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 100 kHz			- 72		
Crosstalk <sup>d</sup>	X <sub>TALK</sub>	R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 1 MHz			- 80		
		R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 100 kHz			- 100		
3 dB bandwidth <sup>d</sup>		R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF	Room		78		MHz
Source Off Capacitance <sup>d</sup>	C <sub>NX(off)</sub>	f = 1 MHz, V <sub>NX</sub> = 0 V	Room		75		pF
Drain Off Capacitance <sup>d</sup>	C <sub>COM(off)</sub>	f = 1 MHz, V <sub>COM</sub> = 0 V	Room		55		
Drain On Capacitance <sup>d</sup>	C <sub>COM(on)</sub>	f = 1 MHz, V <sub>COM</sub> = V <sub>NX</sub> = 0 V	Room		100		
Total Harmonic Distortion <sup>d</sup>	THD	V+ = 2.7 V to 3.6 V, V <sub>IN</sub> = 0.5 Vp-p F = 20 Hz to 20 kHz	Room		0.03		%
Power Supply							
Power Supply Range	V+			1.6		4.3	V
Power Supply Current	I+	V <sub>IN</sub> = 0 or V+	Full			1.0	μA

Notes:

a. Room = 25 °C, Full = as determined by the operating suffix.

b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.

c. Typical values are for design aid only, not guaranteed nor subject to production testing.

d. Guarantee by design, not subjected to production test.

e.  $V_{IN}$  = input voltage to perform proper function.







Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

# DG2747/DG2748/DG2749

Vishay Siliconix




**TYPICAL CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ , unless otherwise noted

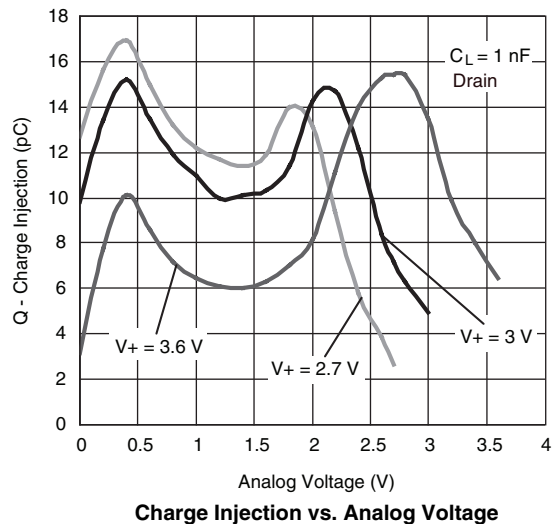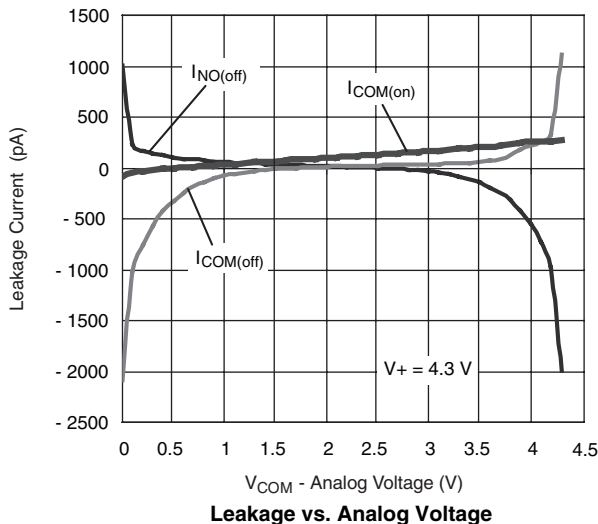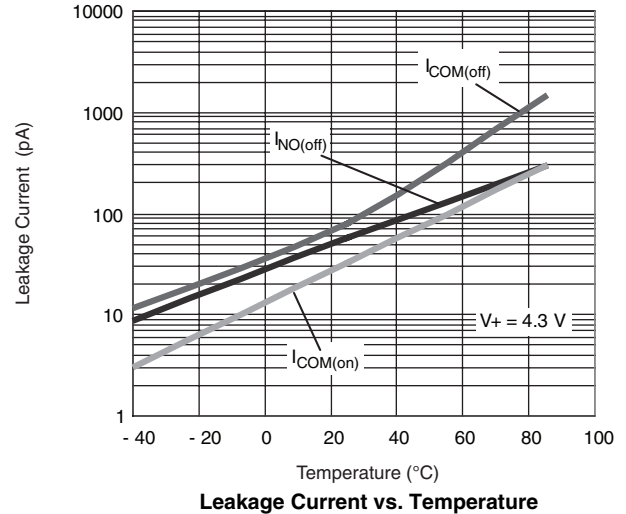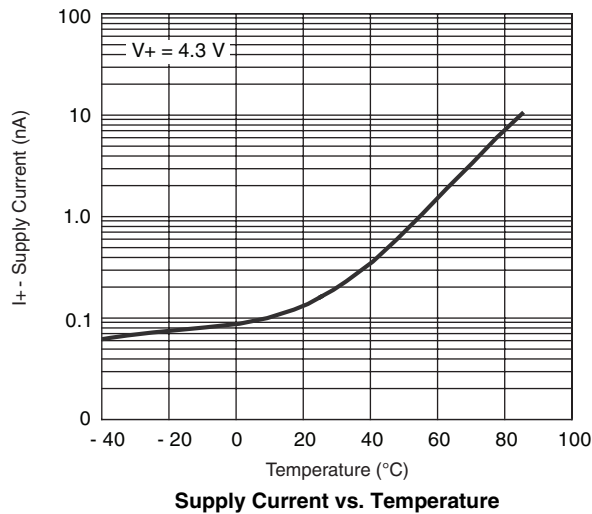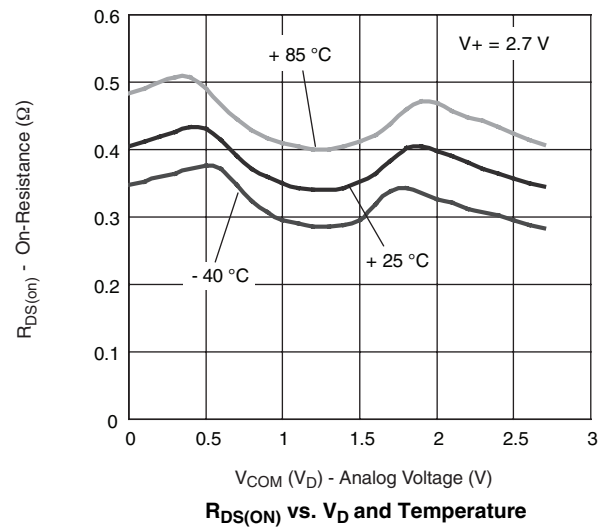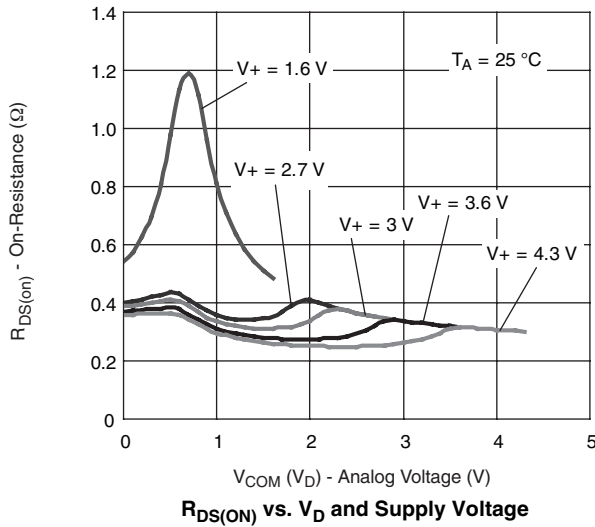





**TYPICAL CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ , unless otherwise noted

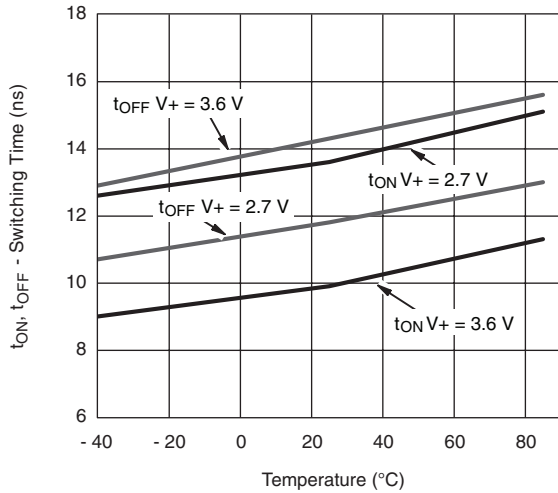


Switching Time vs. Temperature

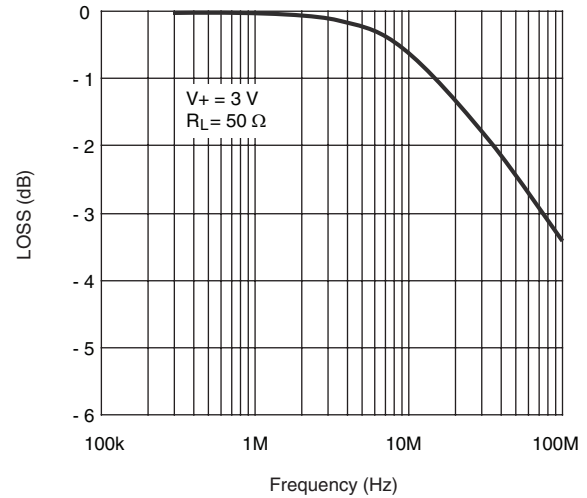

Insertion Loss vs. Frequency

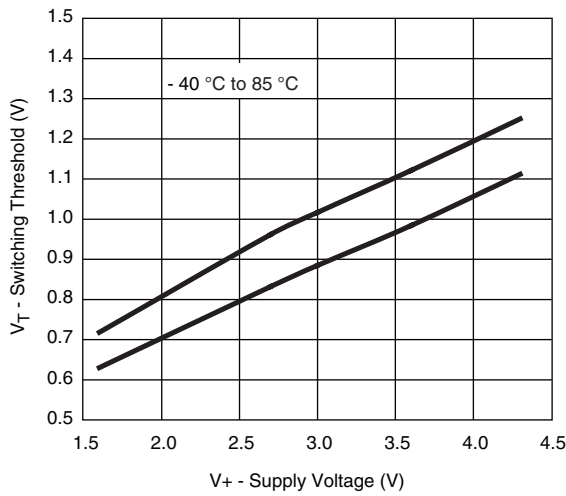


Switching Threshold vs. Supply Voltage

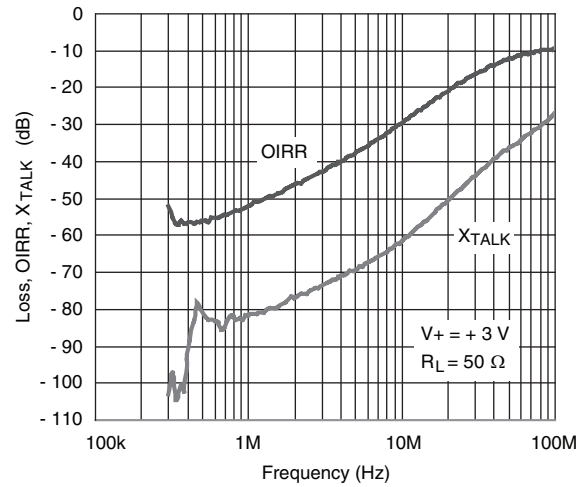


Off-Isolation and Crosstalk vs. Frequency

## TEST CIRCUITS

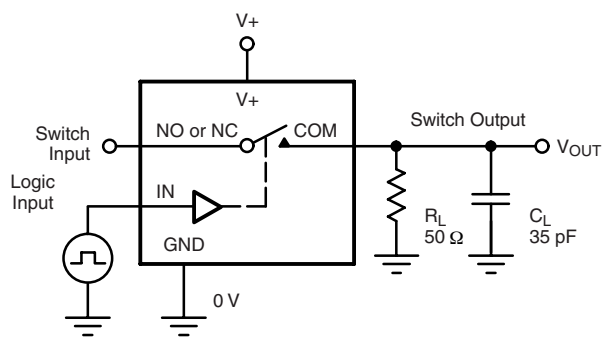


$C_L$  (includes fixture and stray capacitance)

$$V_{OUT} = V_{COM} \left( \frac{R_L}{R_L + R_{ON}} \right)$$

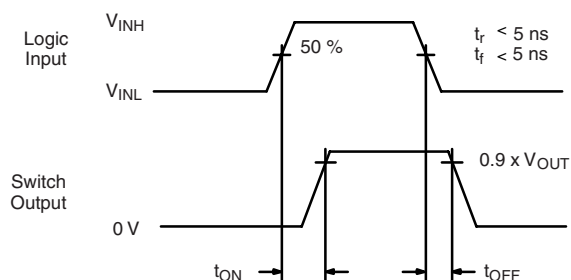

Logic "1" = Switch On  
Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 1. Switching Time

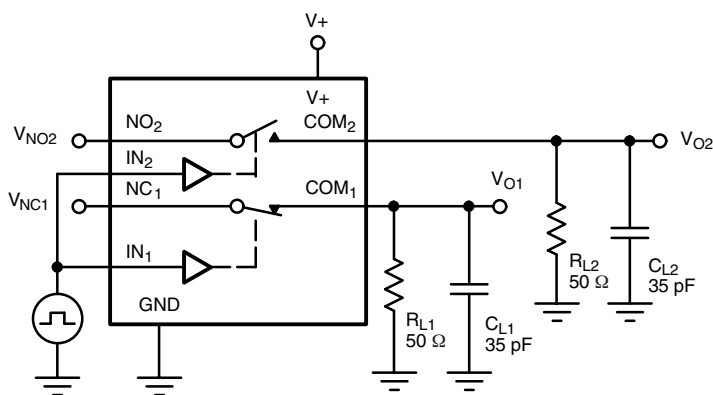

$C_L$  (includes fixture and stray capacitance)

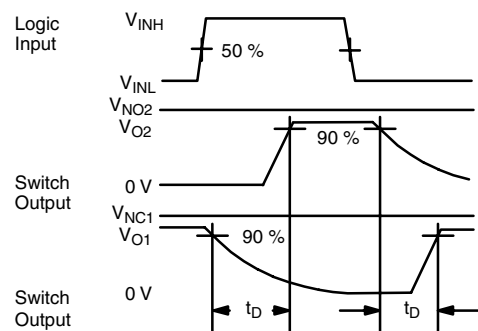


Figure 2. Break-Before-Make (DG2749)





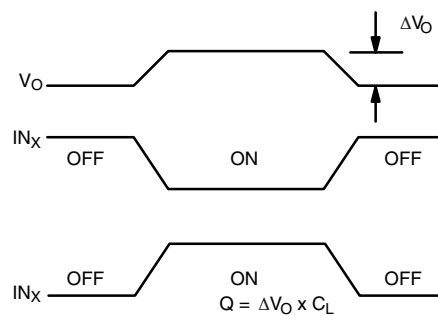


Figure 3. Charge Injection

**TEST CIRCUITS****Figure 4. Off-Isolation****Figure 5. Crosstalk****Figure 6. Channel Off/On Capacitance**

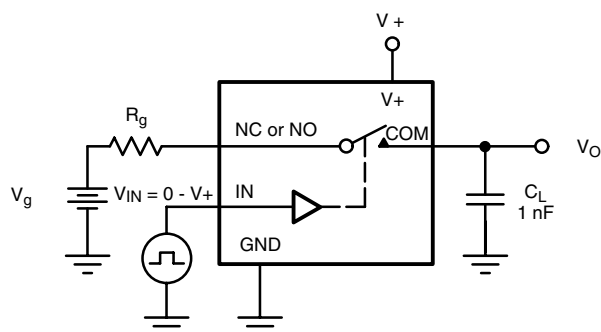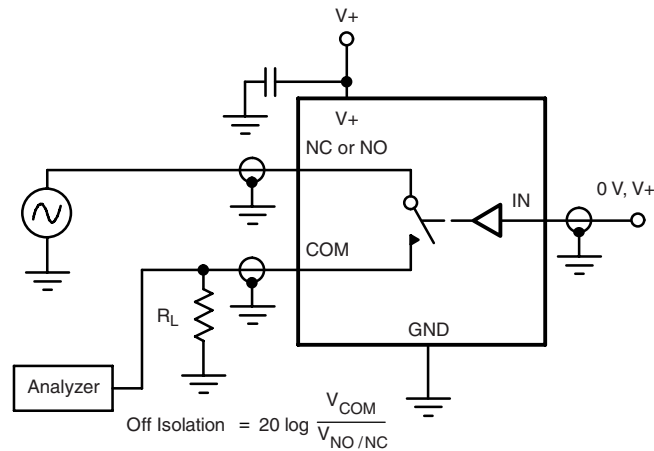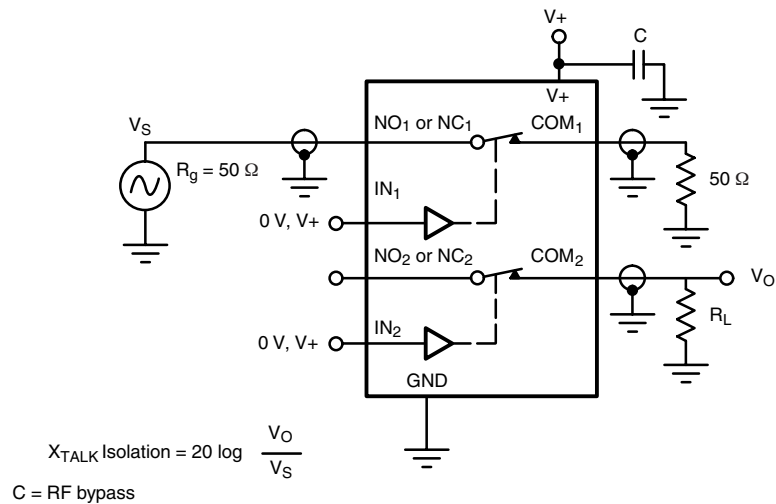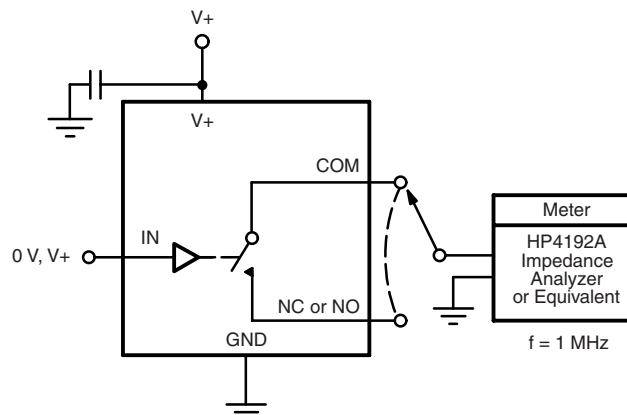

### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.