

**M·C·C·**

Micro Commercial Components  
21201 Itasca Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

**1N4001  
THRU  
1N4007**

## Features


- Low Current Leakage
- Metallurgically Bonded Construction
- Low Cost

## Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 20°C/W Junction To Lead

| MCC Catalog Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|--------------------|----------------|----------------------------------------|---------------------|-----------------------------|
| 1N4001             | ---            | 50V                                    | 35V                 | 50V                         |
| 1N4002             | ---            | 100V                                   | 70V                 | 100V                        |
| 1N4003             | ---            | 200V                                   | 140V                | 200V                        |
| 1N4004             | ---            | 400V                                   | 280V                | 400V                        |
| 1N4005             | ---            | 600V                                   | 420V                | 600V                        |
| 1N4006             | ---            | 800V                                   | 560V                | 800V                        |
| 1N4007             | ---            | 1000V                                  | 700V                | 1000V                       |

**DO-41**

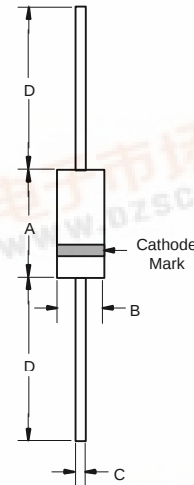

## Electrical Characteristics @ 25°C Unless Otherwise Specified

|                                                         |             |               |                                                       |
|---------------------------------------------------------|-------------|---------------|-------------------------------------------------------|
| Average Forward Current                                 | $I_{F(AV)}$ | 1.0A          | $T_A = 75^\circ\text{C}$                              |
| Peak Forward Surge Current                              | $I_{FSM}$   | 30A           | 8.3ms, half sine                                      |
| Maximum Instantaneous Forward Voltage                   | $V_F$       | 1.1V          | $I_{FM} = 1.0\text{A}; T_J = 25^\circ\text{C}^*$      |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | $I_R$       | 5.0μA<br>50μA | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$ |
| Typical Junction Capacitance                            | $C_J$       | 15pF          | Measured at 1.0MHz, $V_R=4.0\text{V}$                 |

| DIMENSIONS |        |      |       |      |      |
|------------|--------|------|-------|------|------|
| DIM        | INCHES |      | MM    |      | NOTE |
|            | MIN    | MAX  | MIN   | MAX  |      |
| A          | .166   | .205 | 4.10  | 5.20 |      |
| B          | .080   | .107 | 2.00  | 2.70 |      |
| C          | .028   | .034 | .70   | .90  |      |
| D          | 1.000  | ---  | 25.40 | ---  |      |


\*Pulse test: Pulse width 300 μsec, Duty cycle 2%



# 1N4001 thru 1N4007




Figure 1  
Typical Forward Characteristics

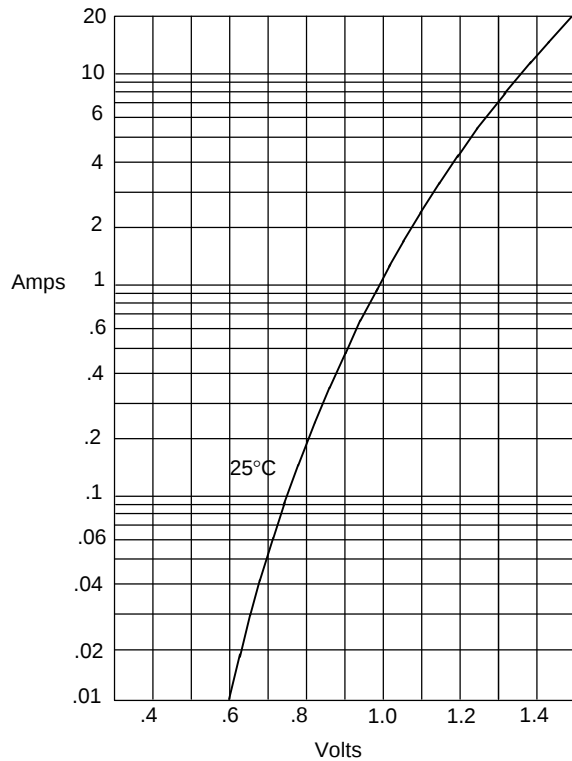


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

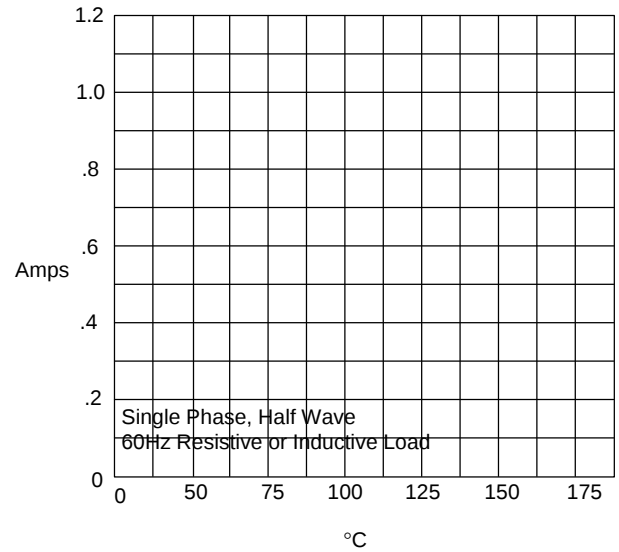

Average Forward Rectified Current - Amperes versus  
Ambient Temperature - °C

Figure 3  
Junction Capacitance

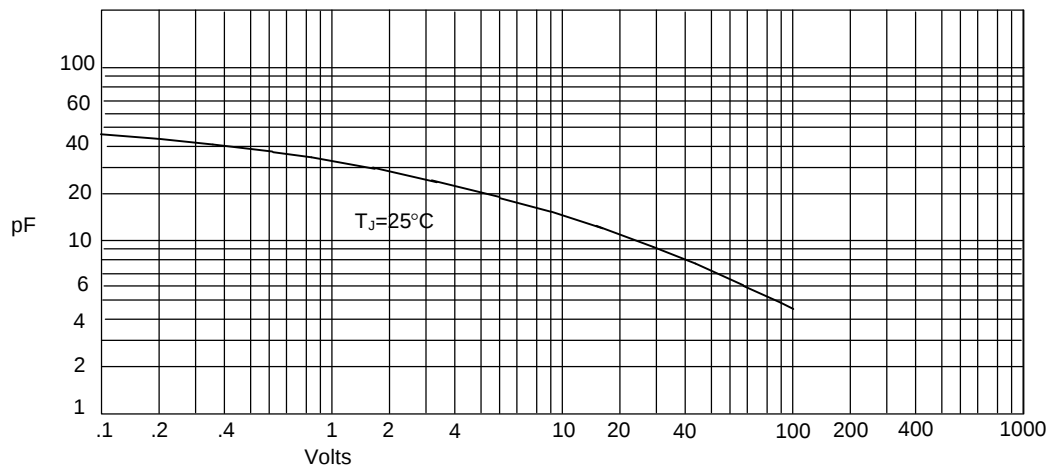


Junction Capacitance - pF versus  
Reverse Voltage - Volts

1N4001 thru 1N4007




Figure 4  
Typical Reverse Characteristics

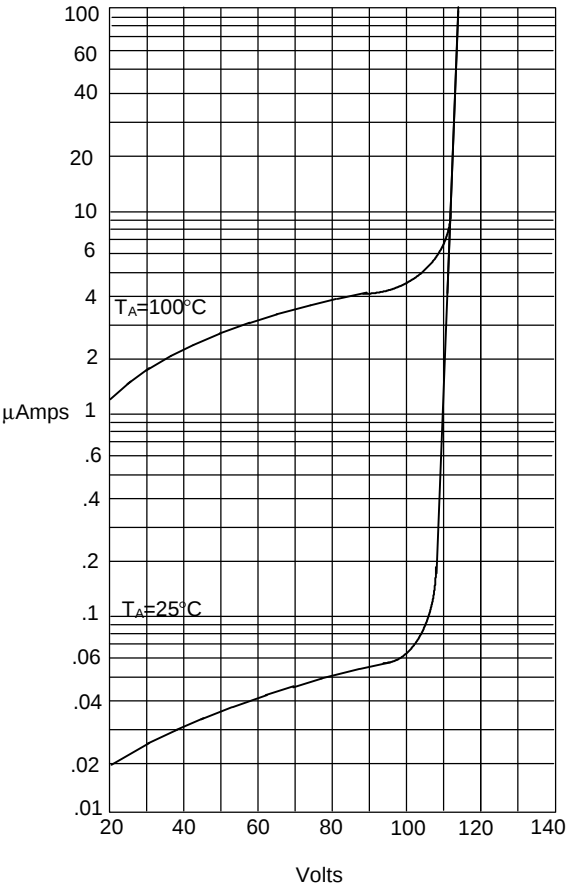

Instantaneous Reverse Leakage Current - MicroAmperes *versus*  
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5  
Peak Forward Surge Current

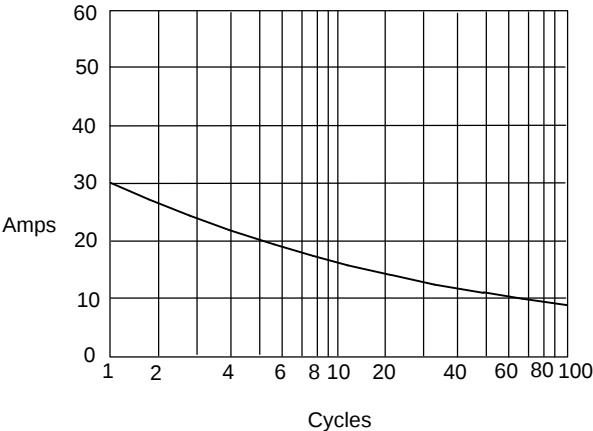

Peak Forward Surge Current - Amperes *versus*  
Number Of Cycles At 60Hz - Cycles