


查询CVCO55CC-0895-0950供应商
CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

捷多邦, 专业PCB打样工厂, 24小时加急出货
Coaxial Resonator Oscillator-CRO
CVCO55CC-0895-0950





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			895	MHz
Upper Frequency:	950			MHz
Tuning Voltage:	0.3		4.7	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	-7.0	-5.0	-3.0	dBm
Supply Current:		35	43	mA
Harmonic Suppression (2 nd Harmonic):		-15	-10	dBc
Pushing:		0.1		MHz/V
Pulling, all Phases:		0.1		MHz pk-pk
Tuning Sensitivity:		22		MHz/V
Phase Noise @ 10kHz offset:		-114		dBc/Hz
Phase Noise @ 100kHz offset:		-135		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			47	pF
Operating Temperature Range:	-30		+70	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

Phase Noise
(1 Hz BW, Typical)

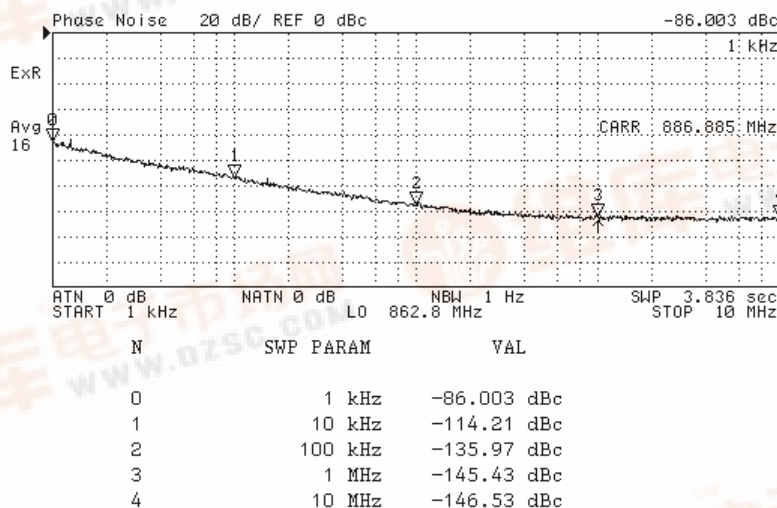


Tuning Curve
(Typical)

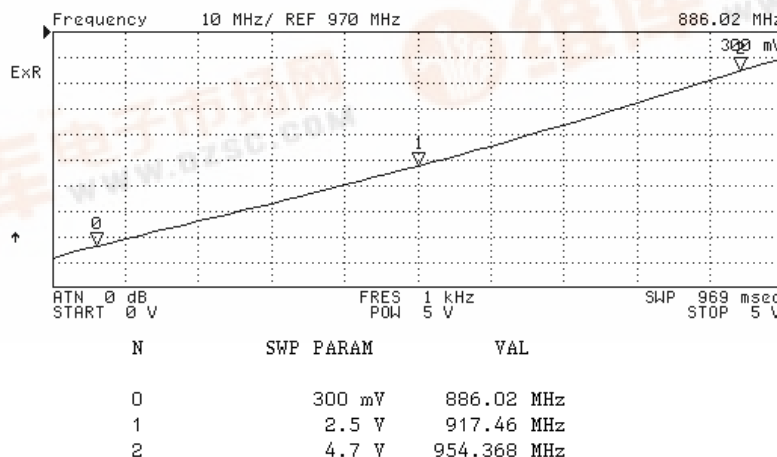

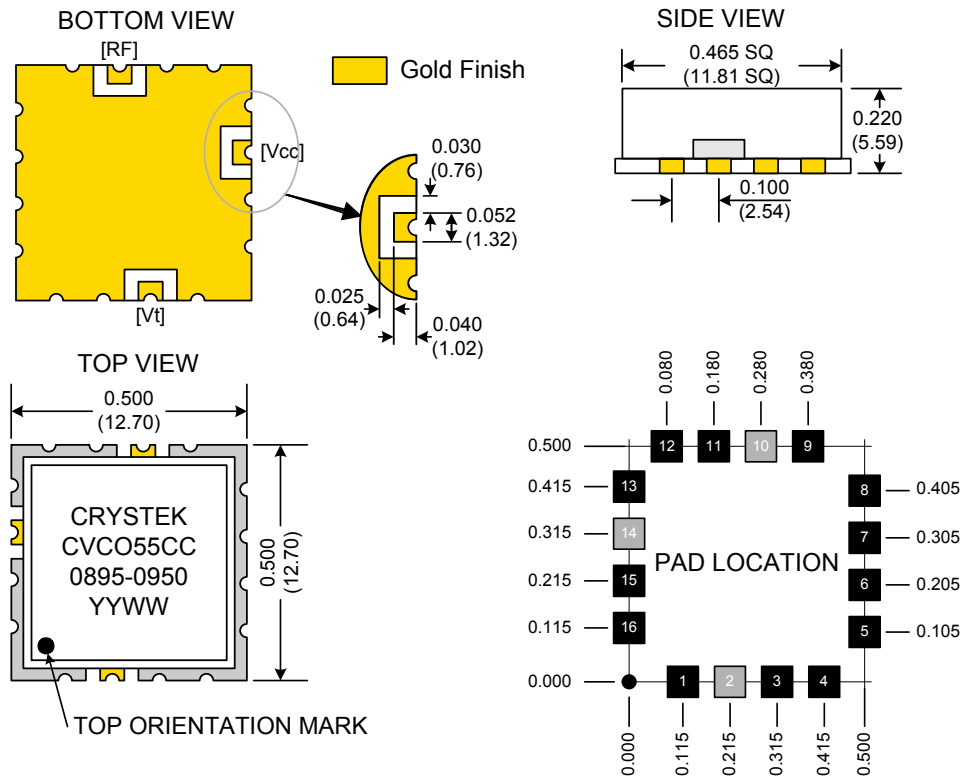

TAPE AND REEL

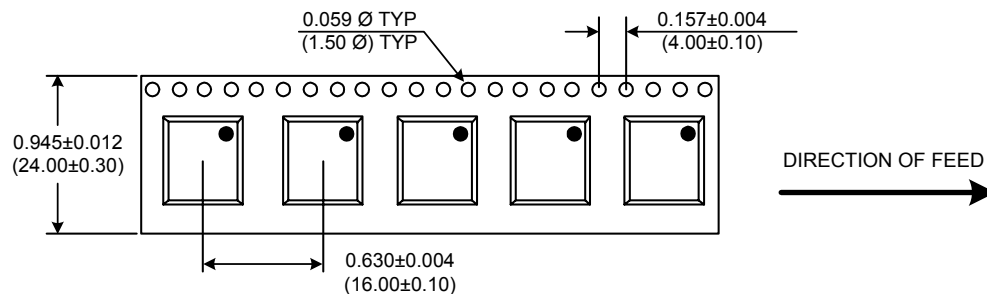

Product Control:

Crystek Part Number:	CVCO55CC-0895-0950	Release Date:	04-March-08
Revision Level:	D	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2