


- $V_{TT}$  bus termination output (output the system  $V_{REF}$ )
- 10 A output current
- 3.3 Vdc, 5 Vdc or 12 Vdc input voltage
- DDR and QDR compatible
- ON/OFF inhibit (for  $V_{TT}$  standby)
- Under-voltage lockout
- Operating temperature range: -40 °C to +85 °C
- Efficiencies up to 91%
- Output overcurrent protection (non-latching, auto-reset)
- Point-of-Load-Alliance (POLA) compatible
- Available RoHS compliant

NEW Product



2 YEAR WARRANTY

The PTHxx060Y are a new series of non-isolated dc-dc converters designed specifically for bus termination in DDR and QDR memory applications. Operating from either a 3.3 Vdc, 5 Vdc or 12 Vdc input, the modules generate a  $V_{TT}$  output that will source or sink up to 10 A of current to accurately track their  $V_{REF}$  input.  $V_{TT}$  is the required bus termination supply voltage, and  $V_{REF}$  is the reference voltage for the memory and chipset bus receiver comparators.  $V_{REF}$  is usually set to half the  $V_{DDQ}$  power supply voltage. The PTHxx060Y series employs an actively switched synchronous rectifier output to provide state of the art stepdown switching conversion. The products are small in size and are an ideal choice where space, performance and high efficiency are desired.

All specifications are typical at nominal input,  $V_{REF} = 1.25$  V, full load at 25 °C unless otherwise stated.  $C_{in}$ ,  $C_{o1}$  and  $C_{o2}$  = typical value

### SPECIFICATIONS

#### OUTPUT SPECIFICATIONS

|                                                                                             |                                                                                                                                                    |                  |
|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Output current<br>(See Note 1)                                                              | (over $\Delta V_{REF}$ range)                                                                                                                      | $\pm 10$ A       |
| Tracking range for $V_{REF}$                                                                |                                                                                                                                                    | 0.55-1.8 V       |
| Tracking tolerance to $V_{REF}$ ( $V_{TT} - V_{REF}$ )<br>(over line, load and temperature) |                                                                                                                                                    | -10 mV to +10 mV |
| Ripple and noise                                                                            | 20 MHz bandwidth                                                                                                                                   | 20 mV pk-pk      |
| Load transient response<br>(See Note 4)                                                     | 30 $\mu$ s settling time<br>Overshoot/undershoot 25 mV typ.                                                                                        |                  |
| Output capacitance:<br>Non-ceramic values<br>(See Notes 4 and 5)                            | PTH03060Y 470 $\mu$ F typ., 5,500 $\mu$ F max.<br>PTH05060Y 470 $\mu$ F typ., 5,500 $\mu$ F max.<br>PTH12060Y 940 $\mu$ F typ., 5,500 $\mu$ F max. |                  |
| Ceramic values<br>(See Note 4)                                                              | PTH03060Y 200 $\mu$ F typ., 300 $\mu$ F max.<br>PTH05060Y 200 $\mu$ F typ., 300 $\mu$ F max.<br>PTH12060Y 400 $\mu$ F typ., 600 $\mu$ F max.       |                  |
| (See Note 6)                                                                                | ESR (non-ceramic)                                                                                                                                  | 4 m $\Omega$ min |

#### INPUT SPECIFICATIONS

|                     |                                                                             |       |
|---------------------|-----------------------------------------------------------------------------|-------|
| Input current       | No load                                                                     | 10 mA |
| Input voltage range | PTH03060Y 2.95-3.65 Vdc<br>PTH05060Y 4.5-5.5 Vdc<br>PTH12060Y 10.8-13.2 Vdc |       |

Undervoltage lockout:

|           |                                                                                    |  |
|-----------|------------------------------------------------------------------------------------|--|
| PTH03060Y | Vin increasing 2.45 V typ., 2.80 V max.<br>Vin decreasing 2.20 V min., 2.40 V typ. |  |
| PTH05060Y | Vin increasing 4.30 V typ., 4.45 V max.<br>Vin decreasing 3.40 V min., 3.70 V typ. |  |
| PTH12060Y | Vin increasing 9.5 V typ., 10.4 V max.<br>Vin decreasing 8.80 V min., 9.0 V typ.   |  |

#### INPUT SPECIFICATIONS CONTD.

|                                   |                                                              |                |
|-----------------------------------|--------------------------------------------------------------|----------------|
| Input capacitance<br>(See Note 3) | PTH03060Y and PTH05060Y 330 $\mu$ F<br>PTH12060Y 560 $\mu$ F |                |
| Remote ON/OFF                     |                                                              | Positive logic |

#### GENERAL SPECIFICATIONS

|                              |                                                                         |                        |
|------------------------------|-------------------------------------------------------------------------|------------------------|
| Efficiency<br>( $I_o = 8$ A) | PTH03060Y 86% typ.<br>PTH05060Y 86% typ.<br>PTH12060Y 83% typ.          |                        |
| Insulation voltage           |                                                                         | Non-isolated           |
| Switching frequency          | PTH03060Y 550-650 kHz<br>PTH05060Y 550-650 kHz<br>PTH12060Y 200-300 kHz |                        |
| Approvals and standards      |                                                                         | EN60950<br>UL/cUL60950 |
| Material flammability        |                                                                         | UL94V-0                |
| Dimensions<br>(L x W x H)    | 25.27 x 15.75 x 9.00 mm<br>0.995 x 0.620 x 0.354 in                     |                        |
| Weight                       |                                                                         | 3.7 g (0.13 oz)        |
| MTBF                         | Telcordia SR-332                                                        | 6,000,000 hours        |

#### ENVIRONMENTAL SPECIFICATIONS

|                                     |                                                 |                                       |
|-------------------------------------|-------------------------------------------------|---------------------------------------|
| Thermal performance<br>(See Note 2) | Operating ambient, temperature<br>Non-operating | -40 °C to +85 °C<br>-40 °C to +125 °C |
| MSL ('Z' suffix only)               | JEDEC J-STD-020C                                | Level 3                               |


#### PROTECTION

|                                       |            |           |
|---------------------------------------|------------|-----------|
| Overcurrent threshold<br>(auto reset) | All models | 20 A typ. |
|---------------------------------------|------------|-----------|



| OUTPUT POWER (MAX.) | INPUT VOLTAGE | V <sub>TT</sub> RANGE | OUTPUT CURRENT (MIN.) | OUTPUT CURRENT (MAX.) | EFFICIENCY (TYP.) | MODEL NUMBER <sup>(8,9)</sup> |
|---------------------|---------------|-----------------------|-----------------------|-----------------------|-------------------|-------------------------------|
| 18 W                | 2.95-3.65 Vdc | 0.55-1.8 Vdc          | 0 A                   | ±10 A                 | 86%               | PTH03060Y                     |
| 18 W                | 4.50-5.50 Vdc | 0.55-1.8 Vdc          | 0 A                   | ±10 A                 | 86%               | PTH05060Y                     |
| 18 W                | 10.8-13.2 Vdc | 0.55-1.8 Vdc          | 0 A                   | ±10 A                 | 83%               | PTH12060Y                     |

### Part Number System with Options

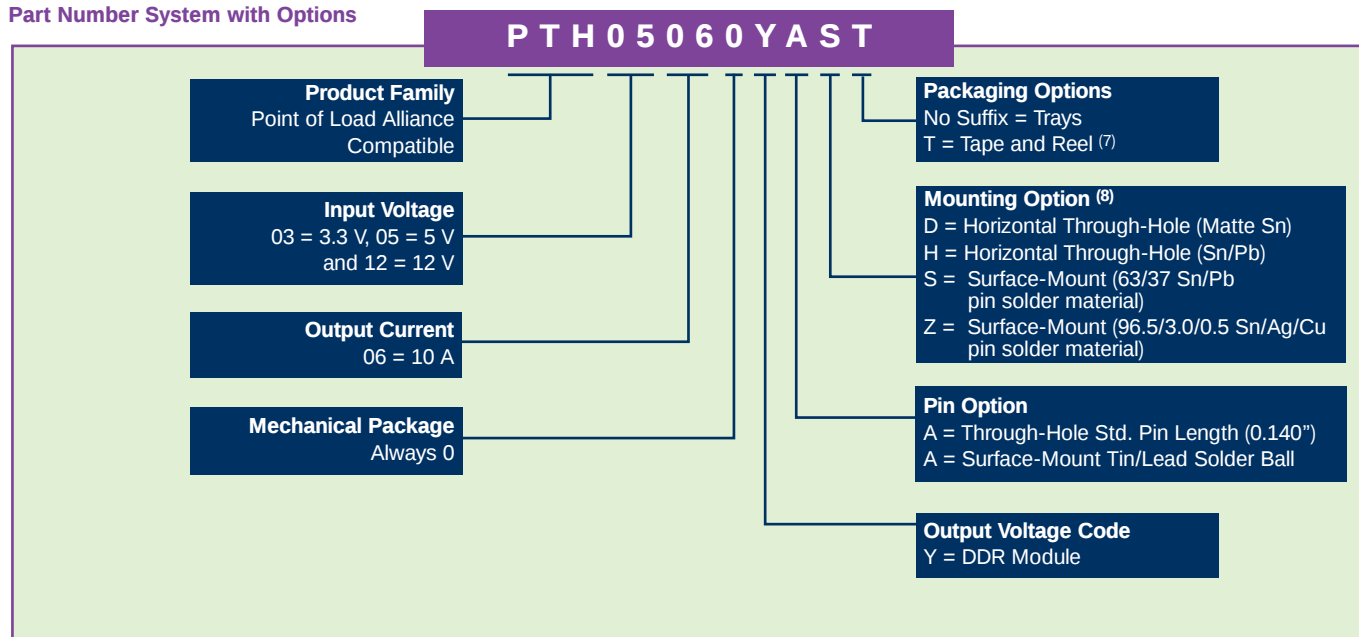

### Notes

- Rating is conditional on the module being soldered to a 4 layer PCB with 1 oz. copper. See the SOA curves or contact the factory for appropriate derating.
- This control pin has an internal pull-up to the input voltage Vin. If it is left open-circuit the module will operate when input power is applied. A small low-leakage (<100 nA) MOSFET is recommended for control. For further information, consult Application Note 179.
- An input capacitor is required for proper operation. The capacitor must be rated for a minimum of 500 mA rms (1000 mA for 12 V input) of ripple current. For further information, consult Application Note 179 on capacitor selection.
- The typical value of external output capacitance value ensures that V<sub>TT</sub> meets the specified transient performance requirements for the memory bus terminations. Lower values of capacitance may be possible when the measured peak change in output current is consistently less than 3 A. Test conditions were 15 A/μs load step, -1.5 A to +1.5 A.
- This is the calculated maximum. The minimum ESR limitation will often result in a lower value. Consult Application Note 179 for further details.
- This is the typical ESR for all the electrolytic (non-ceramic) output capacitance. Use 7 mΩ as the minimum when using max-ESR values to calculate.
- Tape and reel packaging only available on the surface-mount versions.
- To order Pb-free (RoHS compatible) surface-mount parts replace the mounting option 'S' with 'Z', e.g. PTHxx060YAZ. To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTHxx060YAD.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.


### International Safety Standard Approvals




UL/cUL CAN/CSA-C22.2 No. 60950  
File No. E174104




TÜV Product Service (EN60950) Certificate No. B 04 06 38572 044  
CB Report and Certificate to IEC60950. Certificate No. US/8292/UL

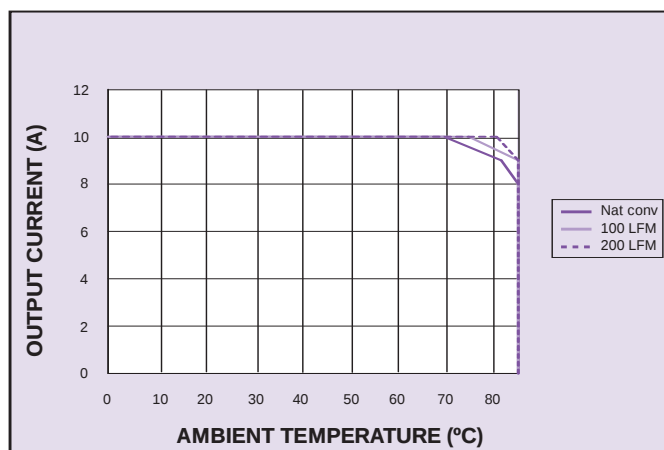


**Figure 1 - Safe Operating Area**  
 $V_{in} = 5.0\text{ V}$ ,  $V_{REF} = 1.25\text{ V}$ ,  $I_{out} = 10\text{ A}$  (See Note A)

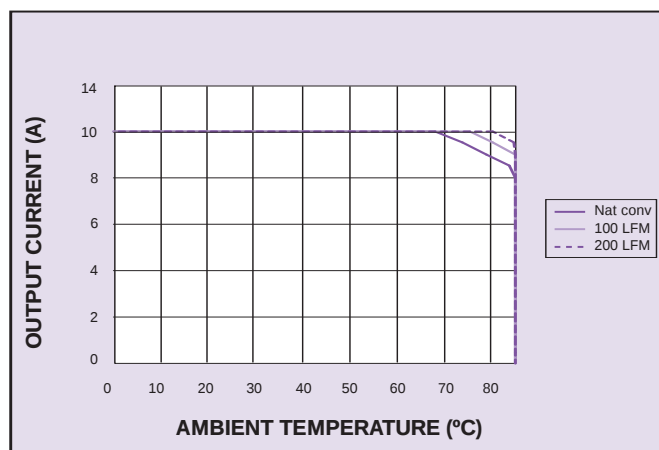

**Figure 2 - Safe Operating Area**  
 $V_{in} = 12\text{ V}$ ,  $V_{REF} = 1.25\text{ V}$ ,  $I_{out} = 10\text{ A}$  (See Note A)

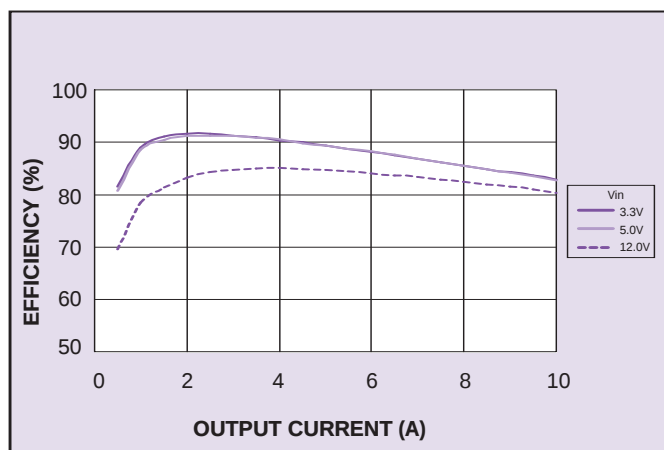

**Figure 3 - Efficiency vs Load Current**  
 $V_{REF} = 1.25\text{ V}$  (See Note B)

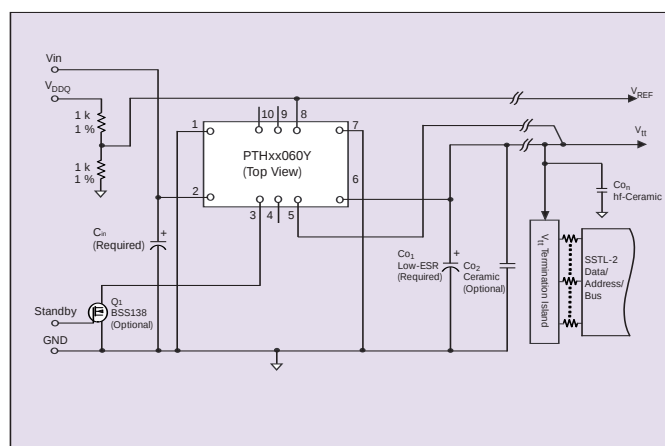

**Figure 4 - Standard Application**

### Notes

- A** The SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B** Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

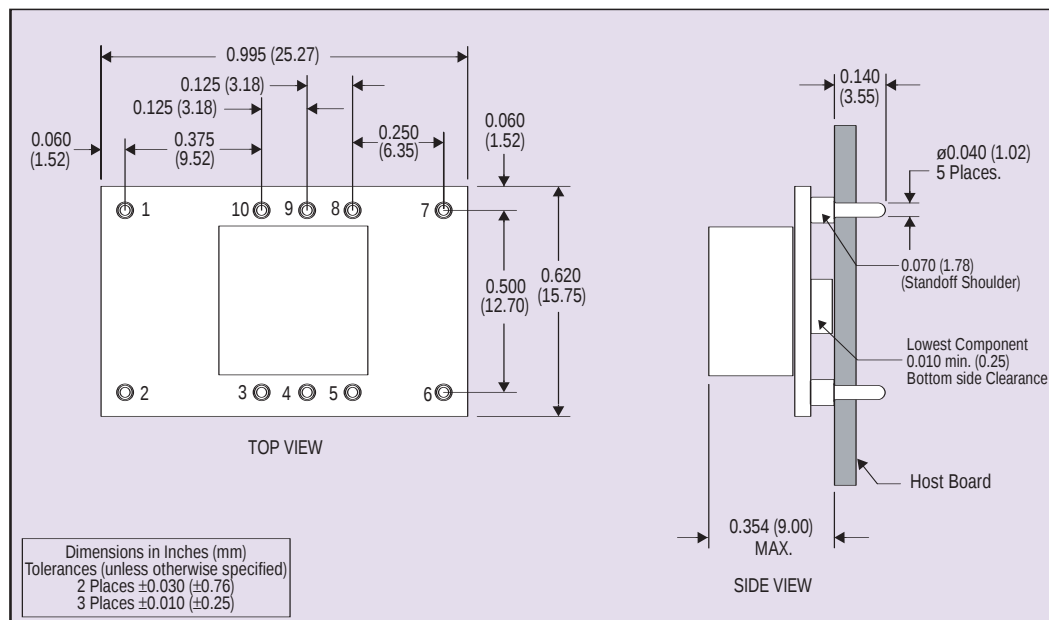


Figure 5 - Plated Through-Hole Mechanical Drawing

| PIN CONNECTIONS |           |
|-----------------|-----------|
| PIN NO.         | FUNCTION  |
| 1               | Ground    |
| 2               | Vin       |
| 3               | Inhibit*  |
| 4               | N/C       |
| 5               | Vo sense  |
| 6               | $V_{TT}$  |
| 7               | Ground    |
| 8               | $V_{REF}$ |
| 9               | N/C       |
| 10              | N/C       |

\*Denotes negative logic:  
Open = Normal operation  
Ground = Function active

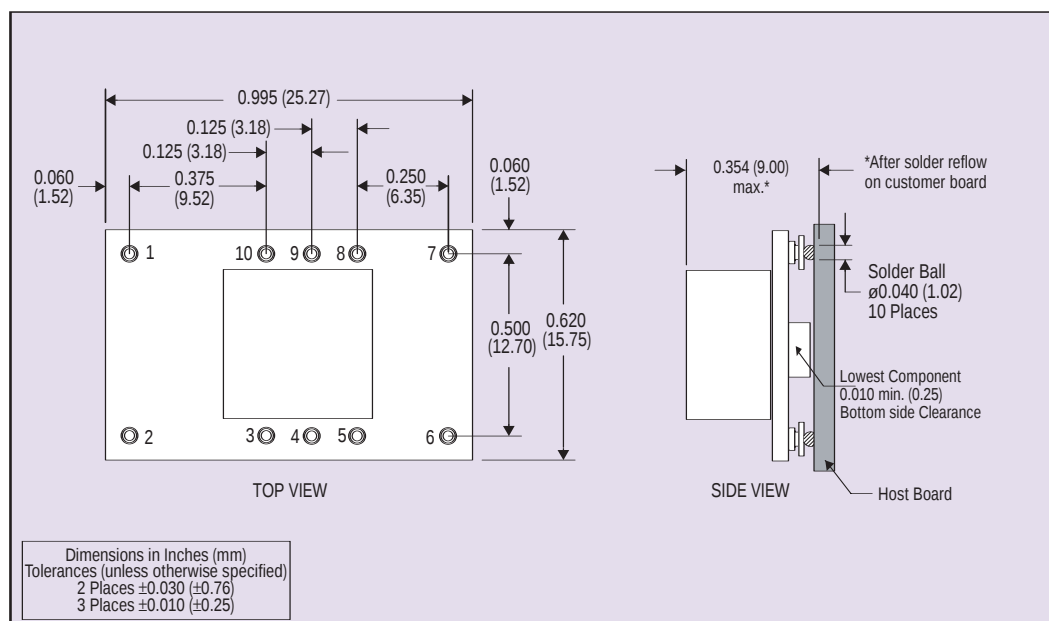


Figure 6 - Surface-Mount Mechanical Drawing