

1N5333B Series

Preferred Device

5 Watt Surmetic™ 40 Zener Voltage Regulators

This is a complete series of 5 Watt Zener diodes with tight limits and better operating characteristics that reflect the superior capabilities of silicon-oxide passivated junctions. All this in an axial lead, transfer-molded plastic package that offers protection in all common environmental conditions.

Features

- Zener Voltage Range – 3.3 V to 200 V
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- Surge Rating of up to 180 W @ 8.3 ms
- Maximum Limits Guaranteed on up to Six Electrical Parameters
- These devices are manufactured with a Pb-Free external lead finish only*

Mechanical Characteristics

CASE: Void free, transfer-molded, thermosetting plastic

FINISH: All external surfaces are corrosion resistant and leads are readily solderable

MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES: 230°C, 1/16 in. from the case for 10 seconds

POLARITY: Cathode indicated by polarity band

MOUNTING POSITION: Any

MAXIMUM RATINGS


| Rating | Symbol | Value | Unit |
|---|----------------|----------------|-------|
| Max. Steady State Power Dissipation @ $T_L = 75^\circ\text{C}$, Lead Length = 3/8 in Derate above 75°C | P_D | 5 | W |
| | | 40 | mW/°C |
| Operating and Storage Temperature Range | T_J, T_{stg} | -65 to +200 | °C |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.



ON Semiconductor®

<http://onsemi.com>



AXIAL LEAD
CASE 17
PLASTIC

MARKING DIAGRAM



- L = Assembly Location
- 1N53xxB = Device Code
(See Table Next Page)
- Y = Year
- WW = Work Week

ORDERING INFORMATION

| Device | Package | Shipping† |
|------------|------------|------------------|
| 1N53xxB | Axial Lead | 1000 Units/Box |
| 1N53xxBRL | Axial Lead | 4000/Tape & Reel |
| 1N53xxBTA* | Axial Lead | 2000/Ammo Pack |

*1N5361B Not Available in 2000/Ammo Pack

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Preferred devices are recommended choices for future use and best overall value.


*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



1N5333B Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{ V Max}$ @ $I_F = 1.0\text{ A}$ for all types)

| Symbol | Parameter |
|--------------|--|
| V_Z | Reverse Zener Voltage @ I_{ZT} |
| I_{ZT} | Reverse Current |
| Z_{ZT} | Maximum Zener Impedance @ I_{ZT} |
| I_{ZK} | Reverse Current |
| Z_{ZK} | Maximum Zener Impedance @ I_{ZK} |
| I_R | Reverse Leakage Current @ V_R |
| V_R | Breakdown Voltage |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |
| I_R | Maximum Surge Current @ $T_A = 25^\circ\text{C}$ |
| ΔV_Z | Reverse Zener Voltage Change |
| I_{ZM} | Maximum DC Zener Current |

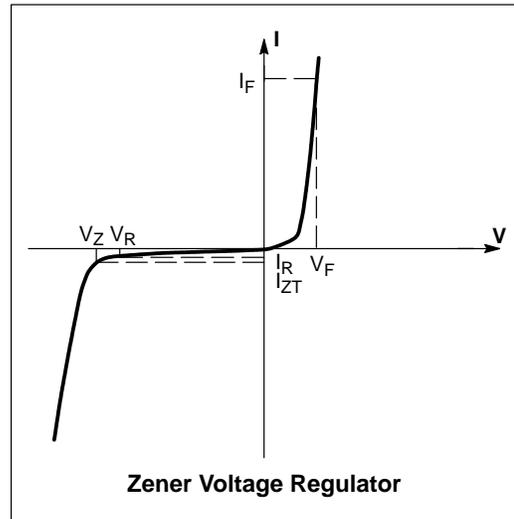

1N5333B Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{ V Max}$ @ $I_F = 1.0\text{ A}$ for all types)

| Device (Note 1) | Device Marking | Zener Voltage (Note 2) | | | | Zener Impedance (Note 2) | | | Leakage Current | | I_R (Note 3) | ΔV_Z (Note 4) | I_{ZM} (Note 5) |
|--------------------|-------------------|------------------------|------------|--------------|------------|--------------------------|---------------------|----------|--------------------|-------------|-------------------|--------------------------|----------------------|
| | | V_Z (Volts) | | | @ I_{ZT} | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | I_{ZK} | I_R @ V_R | | | | |
| | | Min | Nom | Max | mA | Ω | Ω | mA | $\mu\text{A Max}$ | Volts | | | |
| 1N5333B | 1N5333B | 3.14 | 3.3 | 3.47 | 380 | 3 | 400 | 1 | 300 | 1 | 20 | 0.85 | 1440 |
| 1N5334B | 1N5334B | 3.42 | 3.6 | 3.78 | 350 | 2.5 | 500 | 1 | 150 | 1 | 18.7 | 0.8 | 1320 |
| 1N5335B | 1N5335B | 3.71 | 3.9 | 4.10 | 320 | 2 | 500 | 1 | 50 | 1 | 17.6 | 0.54 | 1220 |
| 1N5336B | 1N5336B | 4.09 | 4.3 | 4.52 | 290 | 2 | 500 | 1 | 10 | 1 | 16.4 | 0.49 | 1100 |
| 1N5337B | 1N5337B | 4.47 | 4.7 | 4.94 | 260 | 2 | 450 | 1 | 5 | 1 | 15.3 | 0.44 | 1010 |
| 1N5338B | 1N5338B | 4.85 | 5.1 | 5.36 | 240 | 1.5 | 400 | 1 | 1 | 1 | 14.4 | 0.39 | 930 |
| 1N5339B | 1N5339B | 5.32 | 5.6 | 5.88 | 220 | 1 | 400 | 1 | 1 | 2 | 13.4 | 0.25 | 865 |
| 1N5340B | 1N5340B | 5.70 | 6.0 | 6.30 | 200 | 1 | 300 | 1 | 1 | 3 | 12.7 | 0.19 | 790 |
| 1N5341B | 1N5341B | 5.89 | 6.2 | 6.51 | 200 | 1 | 200 | 1 | 1 | 3 | 12.4 | 0.1 | 765 |
| 1N5342B | 1N5342B | 6.46 | 6.8 | 7.14 | 175 | 1 | 200 | 1 | 10 | 5.2 | 11.5 | 0.15 | 700 |
| 1N5343B | 1N5343B | 7.13 | 7.5 | 7.88 | 175 | 1.5 | 200 | 1 | 10 | 5.7 | 10.7 | 0.15 | 630 |
| 1N5344B | 1N5344B | 7.79 | 8.2 | 8.61 | 150 | 1.5 | 200 | 1 | 10 | 6.2 | 10 | 0.2 | 580 |
| 1N5345B | 1N5345B | 8.27 | 8.7 | 9.14 | 150 | 2 | 200 | 1 | 10 | 6.6 | 9.5 | 0.2 | 545 |
| 1N5346B | 1N5346B | 8.65 | 9.1 | 9.56 | 150 | 2 | 150 | 1 | 7.5 | 6.9 | 9.2 | 0.22 | 520 |
| 1N5347B | 1N5347B | 9.50 | 10 | 10.5 | 125 | 2 | 125 | 1 | 5 | 7.6 | 8.6 | 0.22 | 475 |
| 1N5348B | 1N5348B | 10.45 | 11 | 11.55 | 125 | 2.5 | 125 | 1 | 5 | 8.4 | 8.0 | 0.25 | 430 |
| 1N5349B | 1N5349B | 11.4 | 12 | 12.6 | 100 | 2.5 | 125 | 1 | 2 | 9.1 | 7.5 | 0.25 | 395 |
| 1N5350B | 1N5350B | 12.35 | 13 | 13.65 | 100 | 2.5 | 100 | 1 | 1 | 9.9 | 7.0 | 0.25 | 365 |
| 1N5351B | 1N5351B | 13.3 | 14 | 14.7 | 100 | 2.5 | 75 | 1 | 1 | 10.6 | 6.7 | 0.25 | 340 |
| 1N5352B | 1N5352B | 14.25 | 15 | 15.75 | 75 | 2.5 | 75 | 1 | 1 | 11.5 | 6.3 | 0.25 | 315 |
| 1N5353B | 1N5353B | 15.2 | 16 | 16.8 | 75 | 2.5 | 75 | 1 | 1 | 12.2 | 6.0 | 0.3 | 295 |
| 1N5354B | 1N5354B | 16.15 | 17 | 17.85 | 70 | 2.5 | 75 | 1 | 0.5 | 12.9 | 5.8 | 0.35 | 280 |
| 1N5355B | 1N5355B | 17.1 | 18 | 18.9 | 65 | 2.5 | 75 | 1 | 0.5 | 13.7 | 5.5 | 0.4 | 264 |
| 1N5356B | 1N5356B | 18.05 | 19 | 19.95 | 65 | 3 | 75 | 1 | 0.5 | 14.4 | 5.3 | 0.4 | 250 |
| 1N5357B | 1N5357B | 19 | 20 | 21 | 65 | 3 | 75 | 1 | 0.5 | 15.2 | 5.1 | 0.4 | 237 |
| 1N5358B | 1N5358B | 20.9 | 22 | 23.1 | 50 | 3.5 | 75 | 1 | 0.5 | 16.7 | 4.7 | 0.45 | 216 |
| 1N5359B | 1N5359B | 22.8 | 24 | 25.2 | 50 | 3.5 | 100 | 1 | 0.5 | 18.2 | 4.4 | 0.55 | 198 |
| 1N5360B | 1N5360B | 23.75 | 25 | 26.25 | 50 | 4 | 110 | 1 | 0.5 | 19 | 4.3 | 0.55 | 190 |
| 1N5361B* | 1N5361B | 25.65 | 27 | 28.35 | 50 | 5 | 120 | 1 | 0.5 | 20.6 | 4.1 | 0.6 | 176 |
| 1N5362B | 1N5362B | 26.6 | 28 | 29.4 | 50 | 6 | 130 | 1 | 0.5 | 21.2 | 3.9 | 0.6 | 170 |

Devices listed in **bold, italic** are ON Semiconductor **Preferred** devices. **Preferred** devices are recommended choices for future use and best overall value.

1. **TOLERANCE AND TYPE NUMBER DESIGNATION**

The JEDEC type numbers shown indicate a tolerance of $\pm 5\%$.

2. **ZENER VOLTAGE (V_Z) and IMPEDANCE (I_{ZT} and I_{ZK})**

Test conditions for zener voltage and impedance are as follows: I_Z is applied 40 ± 10 ms prior to reading. Mounting contacts are located $3/8''$ to $1/2''$ from the inside edge of mounting clips to the body of the diode ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).

3. **SURGE CURRENT (I_R)**

Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 5 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 3.3 V and 200 V zener are shown in Figure 6. Mounting contact located as specified in Note 2 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).

4. **VOLTAGE REGULATION (ΔV_Z)**

The conditions for voltage regulation are as follows: V_Z measurements are made at 10% and then at 50% of the I_Z max value listed in the electrical characteristics table. The test current time duration for each V_Z measurement is 40 ± 10 ms. Mounting contact located as specified in Note 2 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).

5. **MAXIMUM REGULATOR CURRENT (I_{ZM})**

The maximum current shown is based on the maximum voltage of a 5% type unit, therefore, it applies only to the B-suffix device. The actual I_{ZM} for any device may not exceed the value of 5 watts divided by the actual V_Z of the device. $T_L = 75^\circ\text{C}$ at $3/8''$ maximum from the device body.

*Not Available in the 2000/Ammo Pack.

1N5333B Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{ V Max}$ @ $I_F = 1.0\text{ A}$ for all types)

| Device (Note 6) | Device Marking | Zener Voltage (Note 7) | | | Zener Impedance (Note 7) | | | Leakage Current | | I_R (Note 8) | ΔV_Z (Note 9) | I_{ZM} (Note 10) | |
|--------------------|-------------------|------------------------|------------|--------------|--------------------------|---------------------|---------------------|--------------------|-------------------|-------------------|--------------------------|-----------------------|-------------|
| | | V_Z (Volts) | | | @ I_{ZT} | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | I_{ZK} | I_R @ V_R | | | | |
| | | Min | Nom | Max | mA | Ω | Ω | mA | $\mu\text{A Max}$ | | | | Volts |
| 1N5363B | 1N5363B | 28.5 | 30 | 31.5 | 40 | 8 | 140 | 1 | 0.5 | 22.8 | 3.7 | 0.6 | 158 |
| 1N5364B | 1N5364B | 31.35 | 33 | 34.65 | 40 | 10 | 150 | 1 | 0.5 | 25.1 | 3.5 | 0.6 | 144 |
| 1N5365B | 1N5365B | 34.2 | 36 | 37.8 | 30 | 11 | 160 | 1 | 0.5 | 27.4 | 3.5 | 0.65 | 132 |
| 1N5366B | 1N5366B | 37.05 | 39 | 40.95 | 30 | 14 | 170 | 1 | 0.5 | 29.7 | 3.1 | 0.65 | 122 |
| 1N5367B | 1N5367B | 40.85 | 43 | 45.15 | 30 | 20 | 190 | 1 | 0.5 | 32.7 | 2.8 | 0.7 | 110 |
| 1N5368B | 1N5368B | 44.65 | 47 | 49.35 | 25 | 25 | 210 | 1 | 0.5 | 35.8 | 2.7 | 0.8 | 100 |
| 1N5369B | 1N5369B | 48.45 | 51 | 53.55 | 25 | 27 | 230 | 1 | 0.5 | 38.8 | 2.5 | 0.9 | 93 |
| 1N5370B | 1N5370B | 53.2 | 56 | 58.8 | 20 | 35 | 280 | 1 | 0.5 | 42.6 | 2.3 | 1.0 | 86 |
| 1N5371B | 1N5371B | 57 | 60 | 63 | 20 | 40 | 350 | 1 | 0.5 | 45.5 | 2.2 | 1.2 | 79 |
| 1N5372B | 1N5372B | 58.9 | 62 | 65.1 | 20 | 42 | 400 | 1 | 0.5 | 47.1 | 2.1 | 1.35 | 76 |
| 1N5373B | 1N5373B | 64.6 | 68 | 71.4 | 20 | 44 | 500 | 1 | 0.5 | 51.7 | 2.0 | 1.52 | 70 |
| 1N5374B | 1N5374B | 71.25 | 75 | 78.75 | 20 | 45 | 620 | 1 | 0.5 | 56 | 1.9 | 1.6 | 63 |
| 1N5375B | 1N5375B | 77.9 | 82 | 86.1 | 15 | 65 | 720 | 1 | 0.5 | 62.2 | 1.8 | 1.8 | 58 |
| 1N5376B | 1N5376B | 82.65 | 87 | 91.35 | 15 | 75 | 760 | 1 | 0.5 | 66 | 1.7 | 2.0 | 54.5 |
| 1N5377B | 1N5377B | 86.45 | 91 | 95.55 | 15 | 75 | 760 | 1 | 0.5 | 69.2 | 1.6 | 2.2 | 52.5 |
| 1N5378B | 1N5378B | 95 | 100 | 105 | 12 | 90 | 800 | 1 | 0.5 | 76 | 1.5 | 2.5 | 47.5 |
| 1N5379B | 1N5379B | 104.5 | 110 | 115.5 | 12 | 125 | 1000 | 1 | 0.5 | 83.6 | 1.4 | 2.5 | 43 |
| 1N5380B | 1N5380B | 114 | 120 | 126 | 10 | 170 | 1150 | 1 | 0.5 | 91.2 | 1.3 | 2.5 | 39.5 |
| 1N5381B | 1N5381B | 123.5 | 130 | 136.5 | 10 | 190 | 1250 | 1 | 0.5 | 98.8 | 1.2 | 2.5 | 36.6 |
| 1N5382B | 1N5382B | 133 | 140 | 147 | 8 | 230 | 1500 | 1 | 0.5 | 106 | 1.2 | 2.5 | 34 |
| 1N5383B | 1N5383B | 142.5 | 150 | 157.5 | 8 | 330 | 1500 | 1 | 0.5 | 114 | 1.1 | 3.0 | 31.6 |
| 1N5384B | 1N5384B | 152 | 160 | 168 | 8 | 350 | 1650 | 1 | 0.5 | 122 | 1.1 | 3.0 | 29.4 |
| 1N5385B | 1N5385B | 161.5 | 170 | 178.5 | 8 | 380 | 1750 | 1 | 0.5 | 129 | 1.0 | 3.0 | 28 |
| 1N5386B | 1N5386B | 171 | 180 | 189 | 5 | 430 | 1750 | 1 | 0.5 | 137 | 1.0 | 4.0 | 26.4 |
| 1N5387B | 1N5387B | 180.5 | 190 | 199.5 | 5 | 450 | 1850 | 1 | 0.5 | 144 | 0.9 | 5.0 | 25 |
| 1N5388B | 1N5388B | 190 | 200 | 210 | 5 | 480 | 1850 | 1 | 0.5 | 152 | 0.9 | 5.0 | 23.6 |

Devices listed in **bold, italic** are ON Semiconductor **Preferred** devices. **Preferred** devices are recommended choices for future use and best overall value.

6. TOLERANCE AND TYPE NUMBER DESIGNATION

The JEDEC type numbers shown indicate a tolerance of $\pm 5\%$.

7. ZENER VOLTAGE (V_Z) and IMPEDANCE (I_{ZT} and I_{ZK})

Test conditions for zener voltage and impedance are as follows: I_Z is applied 40 ± 10 ms prior to reading. Mounting contacts are located $3/8''$ to $1/2''$ from the inside edge of mounting clips to the body of the diode ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).

8. SURGE CURRENT (I_R)

Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3 ms. The data given in Figure 5 may be used to find the maximum surge current for a square wave of any pulse width between 1 ms and 1000 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 3.3 V and 200 V zener are shown in Figure 6. Mounting contact located as specified in Note 7 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).

9. VOLTAGE REGULATION (ΔV_Z)

The conditions for voltage regulation are as follows: V_Z measurements are made at 10% and then at 50% of the I_Z max value listed in the electrical characteristics table. The test current time duration for each V_Z measurement is 40 ± 10 ms. Mounting contact located as specified in Note 7 ($T_A = 25^\circ\text{C} + 8^\circ\text{C}, -2^\circ\text{C}$).

10. MAXIMUM REGULATOR CURRENT (I_{ZM})

The maximum current shown is based on the maximum voltage of a 5% type unit, therefore, it applies only to the B-suffix device. The actual I_{ZM} for any device may not exceed the value of 5 watts divided by the actual V_Z of the device. $T_L = 75^\circ\text{C}$ at $3/8''$ maximum from the device body.

1N5333B Series

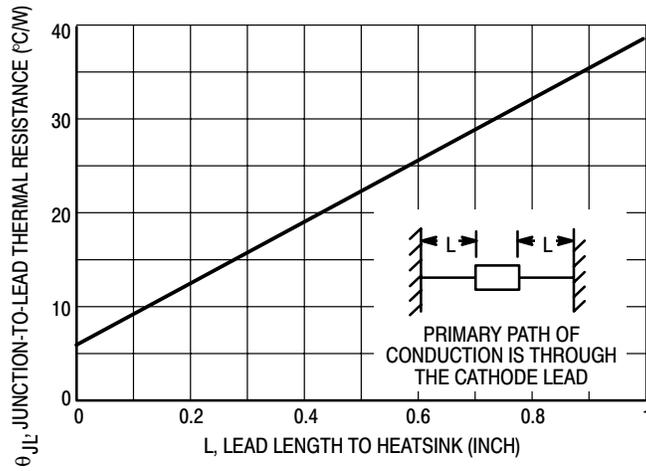


Figure 1. Typical Thermal Resistance

TEMPERATURE COEFFICIENTS

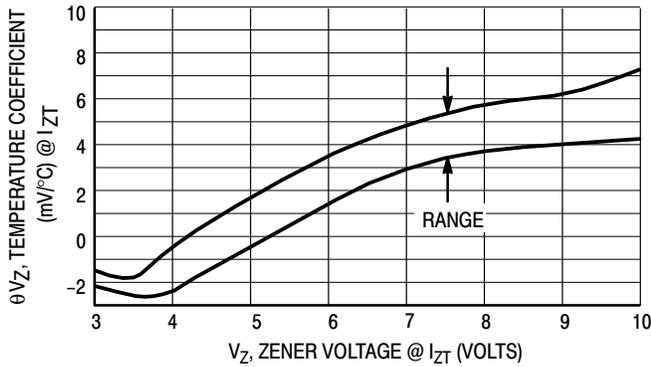


Figure 2. Temperature Coefficient-Range for Units 3 to 10 Volts

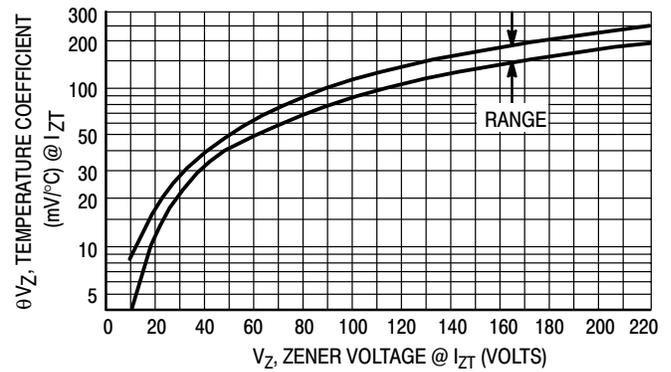


Figure 3. Temperature Coefficient-Range for Units 10 to 220 Volts

1N5333B Series

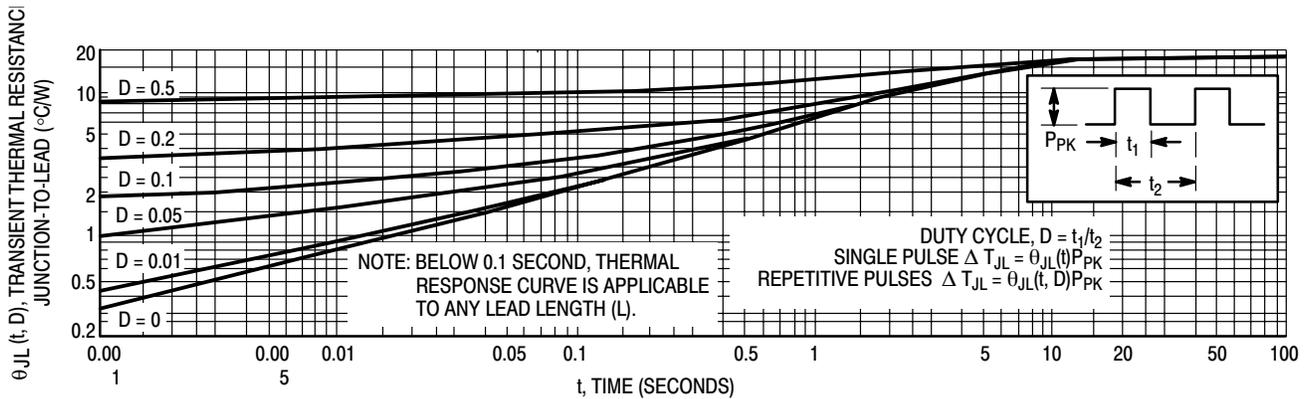


Figure 4. Typical Thermal Response
L, Lead Length = 3/8 Inch

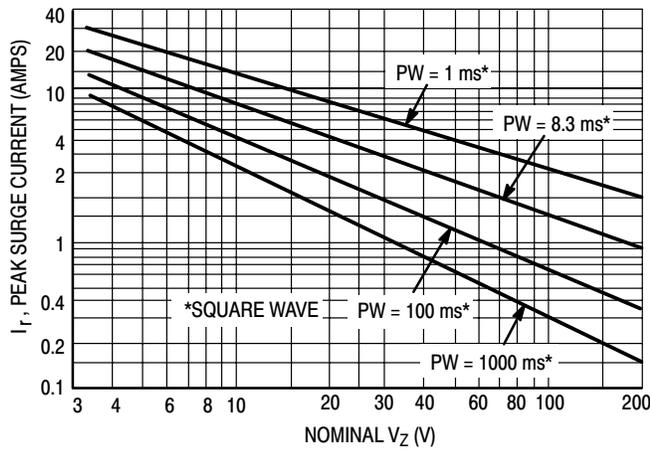


Figure 5. Maximum Non-Repetitive Surge Current
versus Nominal Zener Voltage
(See Note 3)

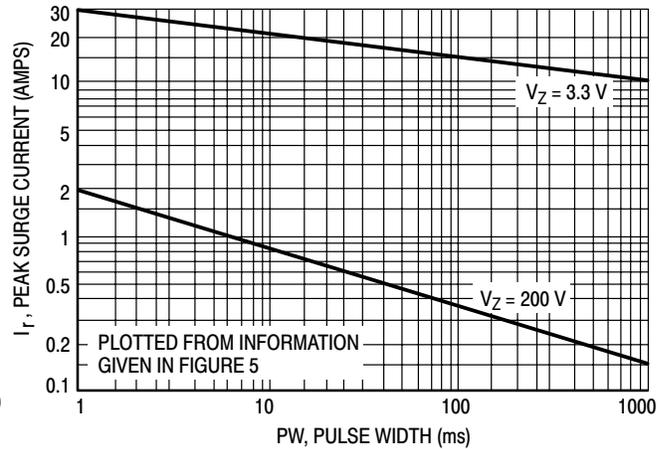


Figure 6. Peak Surge Current versus Pulse Width
(See Note 3)

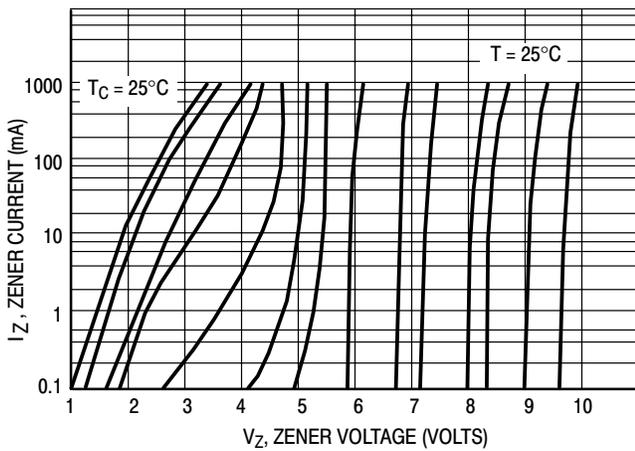


Figure 7. Zener Voltage versus Zener Current
V_Z = 3.3 thru 10 Volts

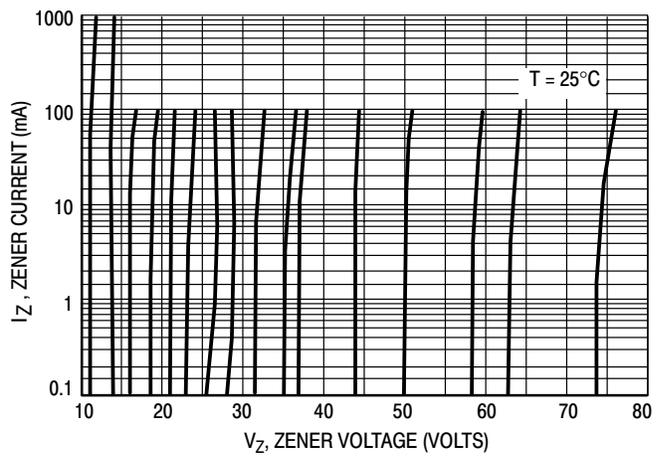


Figure 8. Zener Voltage versus Zener Current
V_Z = 11 thru 75 Volts

1N5333B Series

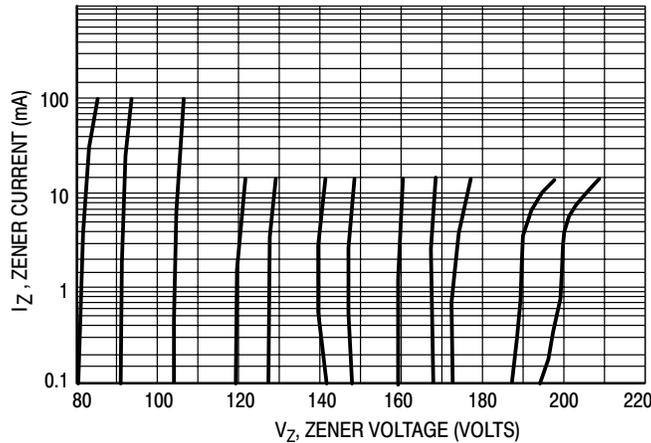


Figure 9. Zener Voltage versus Zener Current
 $V_Z = 82$ thru 200 Volts

APPLICATION NOTE

Since the actual voltage available from a given Zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature, T_L , should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

θ_{LA} is the lead-to-ambient thermal resistance and P_D is the power dissipation.

Junction Temperature, T_J , may be found from:

$$T_J = T_L + \Delta T_{JL}$$

ΔT_{JL} is the increase in junction temperature above the lead temperature and may be found from Figure 4 for a train of power pulses or from Figure 1 for dc power.

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of I_Z , limits of P_D and the extremes of T_J (ΔT_J) may be estimated. Changes in voltage, V_Z , can then be found from:

$$\Delta V = \theta_{VZ} \Delta T_J$$

θ_{VZ} , the Zener voltage temperature coefficient, is found from Figures 2 and 3.


Under high power-pulse operation, the Zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Data of Figure 4 should not be used to compute surge capability. Surge limitations are given in Figure 5. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure 5 be exceeded.

1N5333B Series

PACKAGE DIMENSIONS

AXIAL LEAD CASE 17-02 ISSUE C

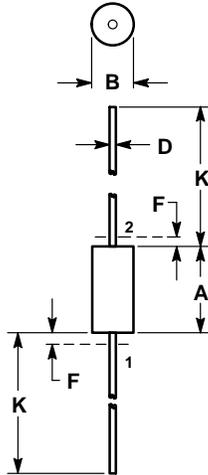

NOTES:
1. LEAD DIAMETER AND FINISH NOT CONTROLLED WITHIN DIMENSION F.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.330 | 0.350 | 8.38 | 8.89 |
| B | 0.130 | 0.145 | 3.30 | 3.68 |
| D | 0.037 | 0.043 | 0.94 | 1.09 |
| F | --- | 0.050 | --- | 1.27 |
| K | 1.000 | 1.250 | 25.40 | 31.75 |

STYLE 1:
PIN 1. ANODE
2. CATHODE

SURMETIC is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.