


查询CVC055CC-1912-2114供应商
CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

捷多邦, 专业PCB打样工厂, 24小时加急出货
Coaxial Resonator Oscillator-CRO
CVC055CC-1912-2114





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1912	MHz
Upper Frequency:	2114			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	0	+3.0	+6.0	dBm
Supply Current:		15	23	mA
Harmonic Suppression (2 nd Harmonic):		-15	-10	dBc
Pushing:		1.0	2.0	MHz/V
Pulling, all Phases:		0.3	0.7	MHz pk-pk
Tuning Sensitivity:		69		MHz/V
Phase Noise @ 10kHz offset:		-106	-103	dBc/Hz
Phase Noise @ 100kHz offset:		-129	-126	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			50	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

Phase Noise (1 Hz BW, Typical)

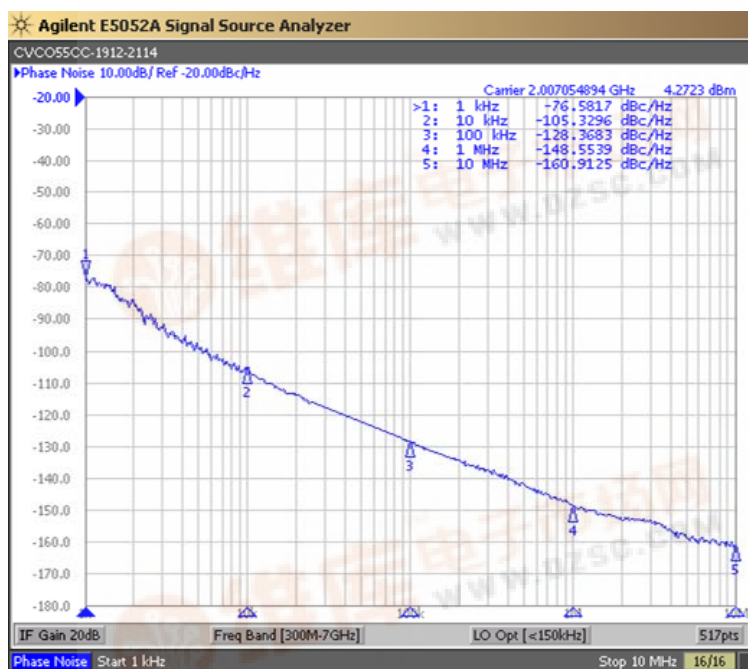

Tuning Curve (Typical)

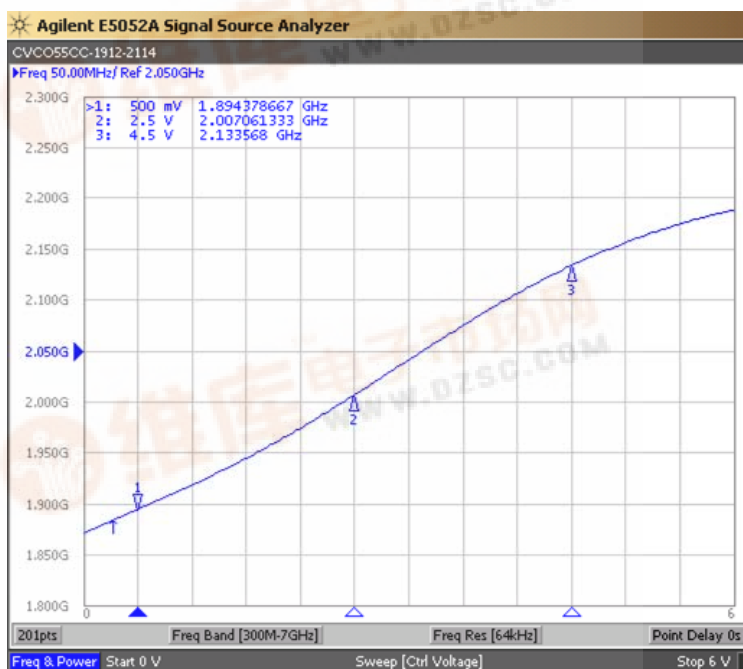





CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

Coaxial Resonator Oscillator-CRO

CVCO55CC-1912-2114

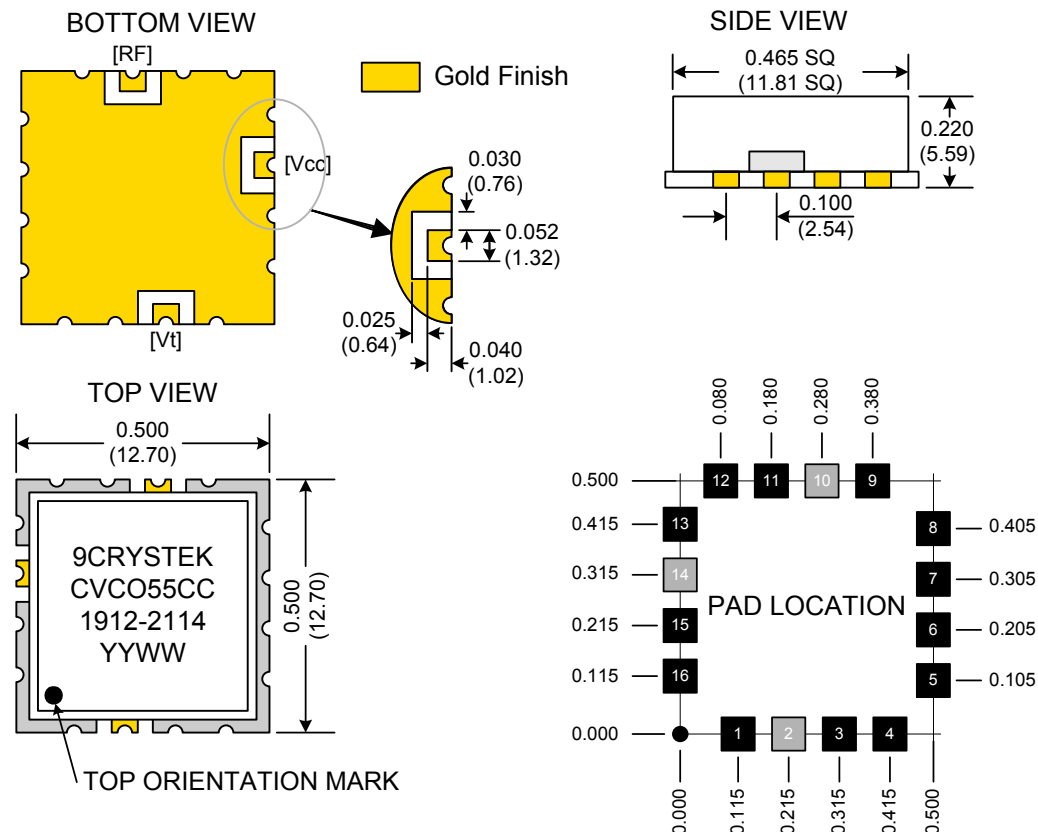

TAPE AND REEL

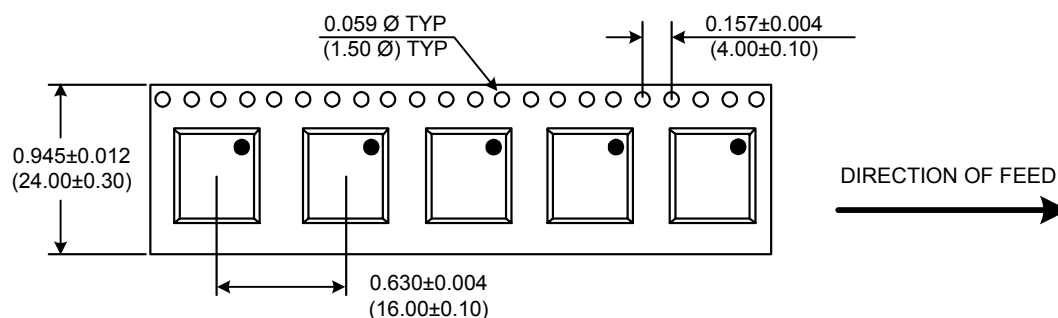

Product Control:

Crystek Part Number:	CVCO55CC-1912-2114	Release Date:	27-March-08
Revision Level:	C	Responsible:	C. Vales

Specification is subject to change without notice



CRYSTEK

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913