



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AO4419**

**30V P-Channel MOSFET**



### General Description

The AO4419 combines advanced trench MOSFET technology with a low resistance package to provide extremely low  $R_{DS(ON)}$ . This device is ideal for load switch and battery protection applications.

### Product Summary

$V_{DS}$	-30V
$I_D$ (at $V_{GS}=-10V$ )	-9.7A
$R_{DS(ON)}$ (at $V_{GS}=-10V$ )	< 20mΩ
$R_{DS(ON)}$ (at $V_{GS} = -4.5V$ )	< 35mΩ

100% UIS Tested  
100%  $R_g$  Tested

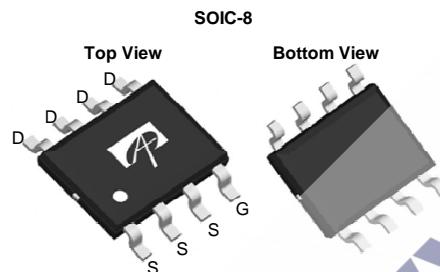

### Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	-30	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current	$I_D$	-9.7	A
Current $T_A=70^\circ C$		-7.8	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	-70	
Avalanche Current <sup>C</sup>	$I_{AS}, I_{AR}$	-27	A
Avalanche energy $L=0.1mH$ <sup>C</sup>	$E_{AS}, E_{AR}$	36	mJ
Power Dissipation <sup>B</sup>	$P_D$	3.1	W
Power Dissipation $T_A=70^\circ C$		2	
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup> $t \leq 10s$	$R_{\theta JA}$	31	40	°C/W
Maximum Junction-to-Ambient <sup>A,D</sup> Steady-State		59	75	°C/W
Maximum Junction-to-Lead	$R_{\theta JL}$	16	24	°C/W

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$I_D=-250\mu\text{A}, V_{GS}=0\text{V}$	-30			V
$\text{I}_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{DS}=-30\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			-1 -5	$\mu\text{A}$
$\text{I}_{\text{GSS}}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}= \pm 20\text{V}$			$\pm 100$	nA
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-1.5	-2.0	-2.5	V
$\text{I}_{\text{D(ON)}}$	On state drain current	$V_{GS}=-10\text{V}, V_{DS}=-5\text{V}$	-70			A
$\text{R}_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=-10\text{V}, I_D=-9.7\text{A}$ $T_J=125^\circ\text{C}$		16.5 24	20 29	$\text{m}\Omega$
		$V_{GS}=-4.5\text{V}, I_D=-7\text{A}$		26	35	$\text{m}\Omega$
$\text{g}_{\text{FS}}$	Forward Transconductance	$V_{DS}=-5\text{V}, I_D=-9.7\text{A}$		27		S
$\text{V}_{\text{SD}}$	Diode Forward Voltage	$I_S=-1\text{A}, V_{GS}=0\text{V}$		-0.75	-1	V
$\text{I}_{\text{S}}$	Maximum Body-Diode Continuous Current				-4	A
$\text{I}_{\text{SM}}$	Pulsed Body-Diode Current <sup>C</sup>				-70	A
<b>DYNAMIC PARAMETERS</b>						
$\text{C}_{\text{iss}}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=-15\text{V}, f=1\text{MHz}$		1040		pF
$\text{C}_{\text{oss}}$	Output Capacitance			180		pF
$\text{C}_{\text{rss}}$	Reverse Transfer Capacitance			125		pF
$\text{R}_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	2	4	6	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$\text{Q}_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=-15\text{V}, I_D=-9.7\text{A}$		19		nC
$\text{Q}_g(4.5\text{V})$	Total Gate Charge			9.6		nC
$\text{Q}_{\text{gs}}$	Gate Source Charge			3.6		nC
$\text{Q}_{\text{gd}}$	Gate Drain Charge			4.6		nC
$t_{\text{D(on)}}$	Turn-On DelayTime	$V_{GS}=-10\text{V}, V_{DS}=-15\text{V}, R_L=1.5\Omega, R_{\text{GEN}}=3\Omega$		10		ns
$t_r$	Turn-On Rise Time			5.5		ns
$t_{\text{D(off)}}$	Turn-Off DelayTime			26		ns
$t_f$	Turn-Off Fall Time			9		ns
$t_{\text{rr}}$	Body Diode Reverse Recovery Time		$I_F=-9.7\text{A}, dI/dt=500\text{A}/\mu\text{s}$	11.5		ns
$Q_{\text{rr}}$	Body Diode Reverse Recovery Charge	$I_F=-9.7\text{A}, dI/dt=500\text{A}/\mu\text{s}$		25		nC

A. The value of  $R_{\text{0JA}}$  is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A = 25^\circ\text{C}$ . The value in any given application depends on the user's specific board design.

B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$ , using  $\leq 10\text{s}$  junction-to-ambient thermal resistance.

C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

D. The  $R_{\text{0JA}}$  is the sum of the thermal impedance from junction to lead  $R_{\text{0JL}}$  and lead to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using  $<300\mu\text{s}$  pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-ambient thermal impedance which is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, assuming a maximum junction temperature of  $T_{J(\text{MAX})}=150^\circ\text{C}$ . The SOA curve provides a single pulse rating.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

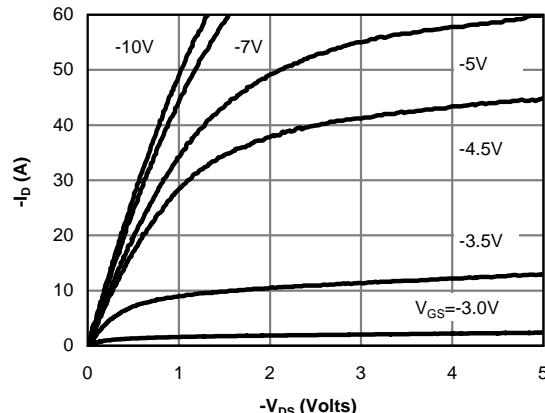
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


Fig 1: On-Region Characteristics (Note E)

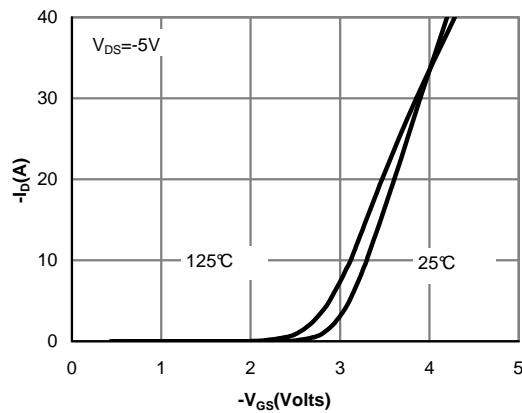


Figure 2: Transfer Characteristics (Note E)

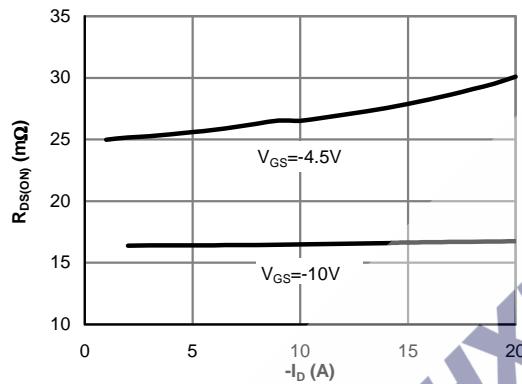


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

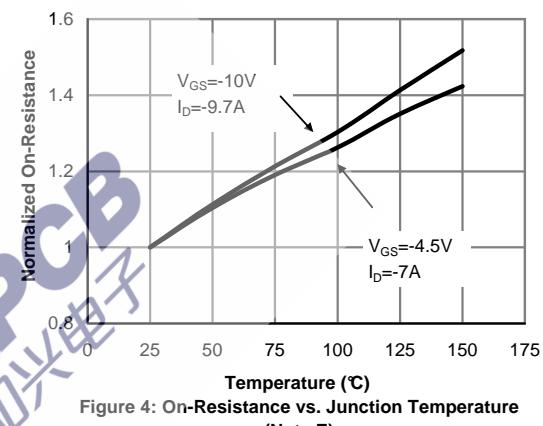


Figure 4: On-Resistance vs. Junction Temperature (Note E)

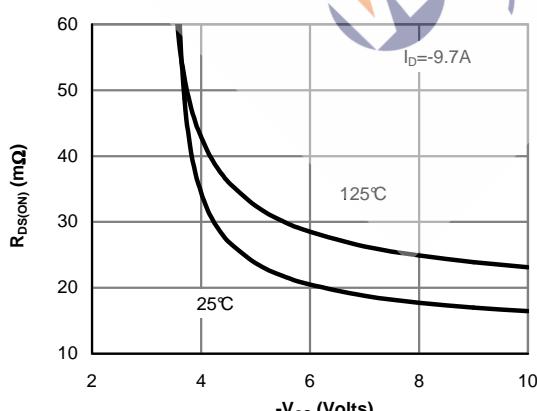


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)






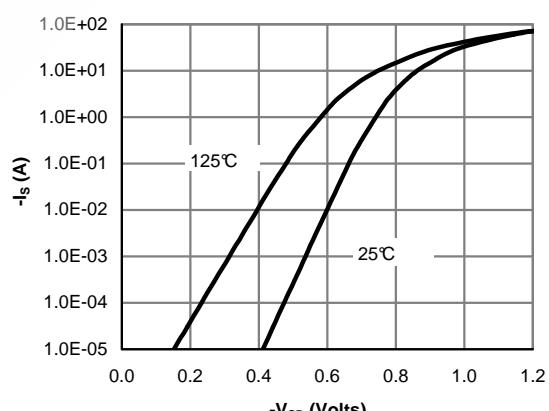


Figure 6: Body-Diode Characteristics (Note E)

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

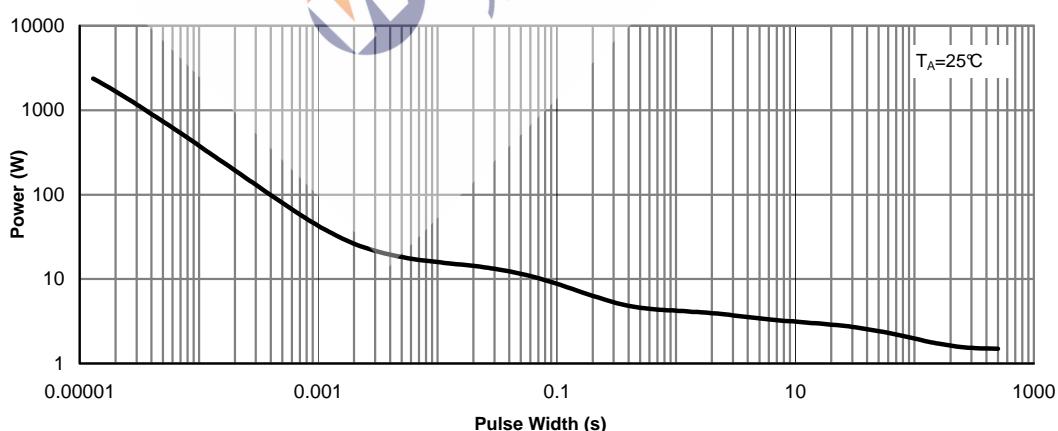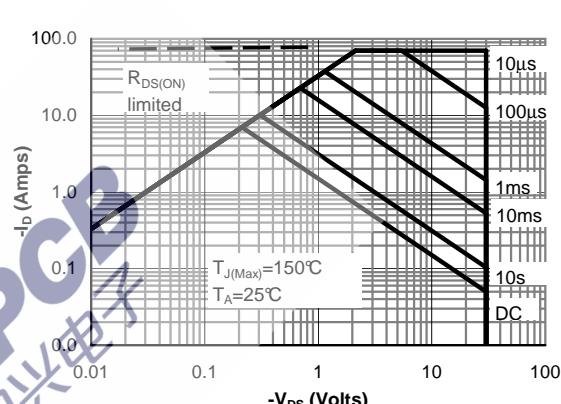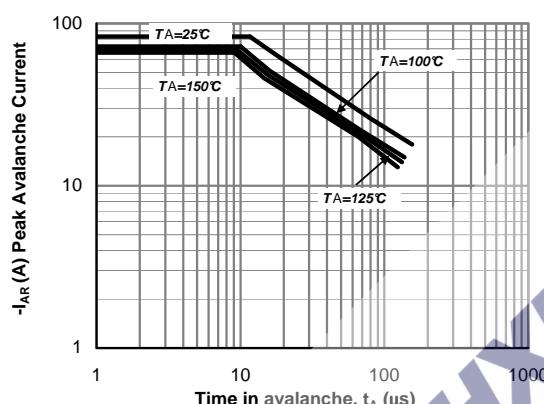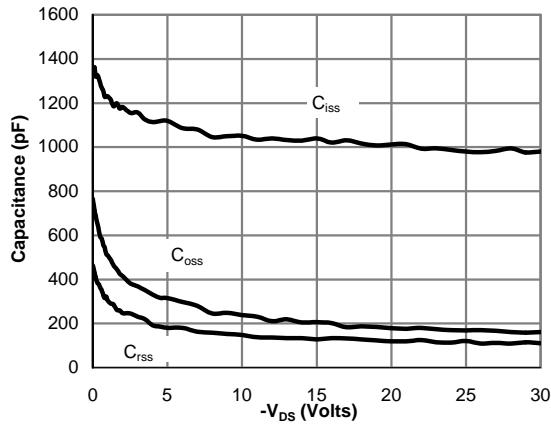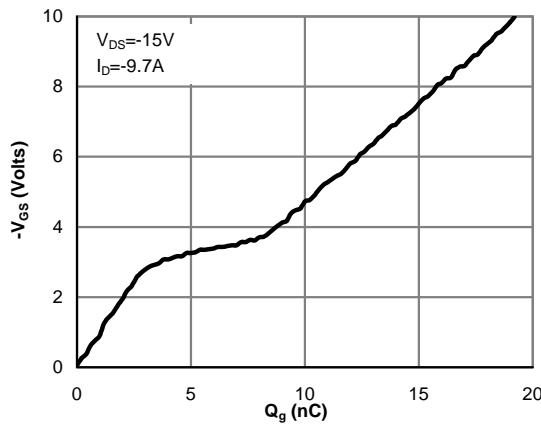

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS




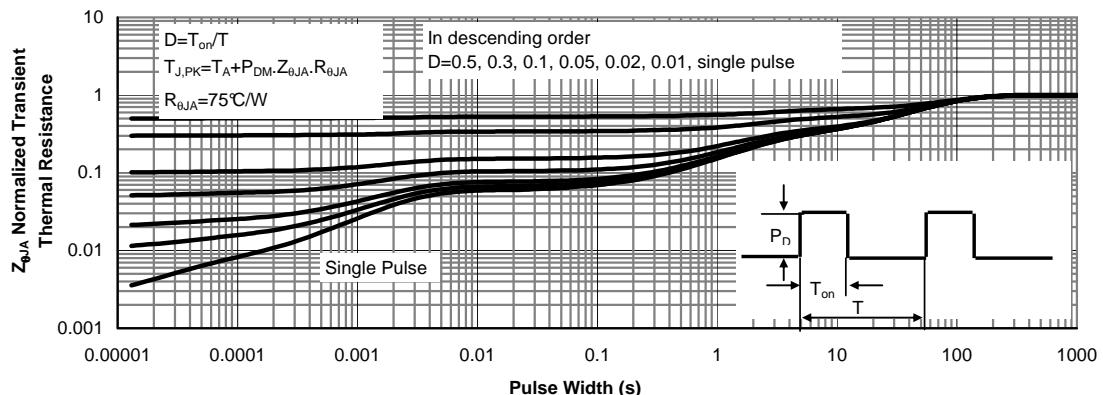


Figure 12: Normalized Maximum Transient Thermal Impedance (Note F)

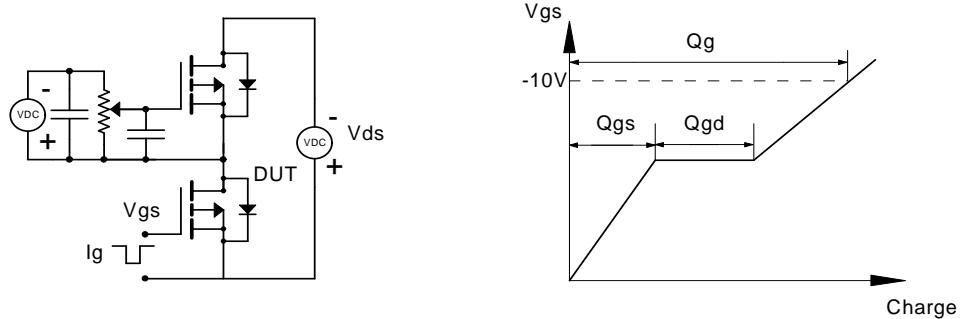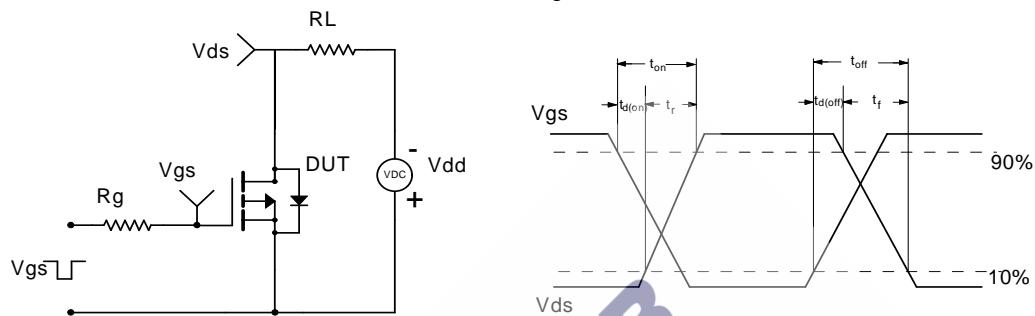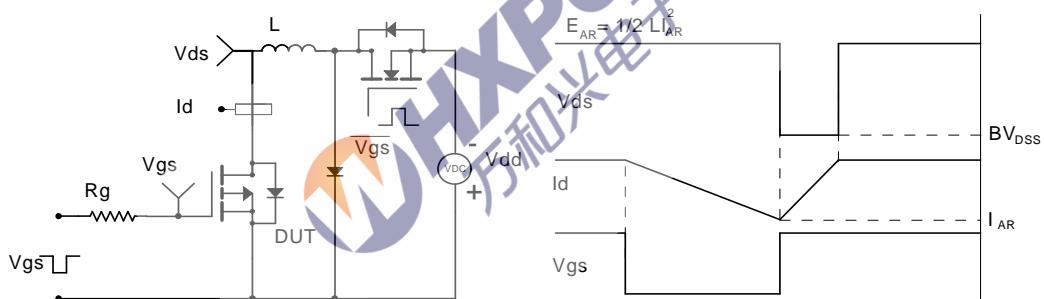

**Gate Charge Test Circuit & Waveform**

**Resistive Switching Test Circuit & Waveforms**

**Unclamped Inductive Switching (UIS) Test Circuit & Waveforms**

**Diode Recovery Test Circuit & Waveforms**
