



# *SAW Components*

*Data Sheet R 2702*

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe and some circuitry patterns, all in a dark, monochromatic color scheme.



## SAW Components

R 2702

## Resonator

418,05 MHz

### Data Sheet


SMD Ceramic package **QCC8C**

#### Features

- 2-port resonator
- nominal 180°-phase at resonance
- Provides reliable, fundamental mode, quartz frequency stabilization i.e. in transmitters or local oscillators

#### Terminals


- Ni, gold plated

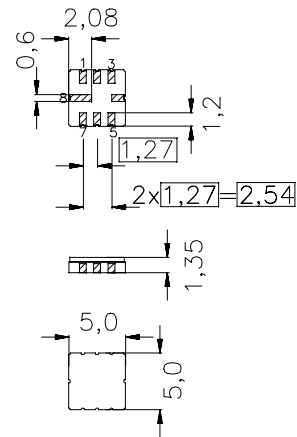

Dimensions in mm, approx. weight 0,1 g

#### Pin configuration

|     |                         |
|-----|-------------------------|
| 2   | Input / Output          |
| 6   | Output / Input          |
| 7   | Ground (Input / Output) |
| 3   | Ground (Output / Input) |
| 4,8 | Ground (case)           |

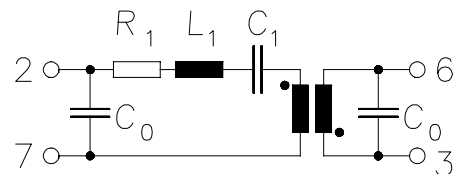

| Type  | Ordering code     | Marking and Package according to | Packing according to |
|-------|-------------------|----------------------------------|----------------------|
| R2702 | B39421-R2702-U310 | C61157-A7-A56                    | F61074-V8070-Z000    |

Electrostatic Sensitive Device (ESD)

#### Maximum ratings

|                            |           |         |     |                       |
|----------------------------|-----------|---------|-----|-----------------------|
| Operable temperature range | $T_A$     | -45/+85 | °C  | between any terminals |
| Storage temperature range  | $T_{stg}$ | -45/+85 | °C  |                       |
| DC voltage                 | $V_{DC}$  | 12      | V   |                       |
| Source power               | $P_S$     | 0       | dBm |                       |



## SAW Components

R 2702

### Resonator

418,05 MHz

#### Data Sheet

#### Characteristics

Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating Source impedance:  $Z_S = 50\ \Omega$   
 Terminating Load impedance:  $Z_L = 50\ \Omega$

|                                                                   |                 | min.    | typ.    | max.    |                    |
|-------------------------------------------------------------------|-----------------|---------|---------|---------|--------------------|
| <b>Center frequency</b><br>(center frequency between 3 dB points) | $f_c$           | 417,975 | 418,050 | 418,125 | MHz                |
| <b>Minimum insertion attenuation</b>                              | $\alpha_{\min}$ | —       | 9,2     | 10,5    | dB                 |
| Phase at $f_c$                                                    | $\varphi$       | —       | 160     | —       | ° el.              |
| Loaded quality factor                                             | $Q_L$           | 5000    | 7200    | —       |                    |
| Unloaded quality factor                                           | $Q_U$           | 8000    | 10200   | —       |                    |
| <b>Ageing of <math>f_c</math></b>                                 |                 | —       | —       | ±50     | ppm                |
| <b>Equivalent circuit elements</b>                                |                 |         |         |         |                    |
| Motional capacitance                                              | $C_1$           | —       | 0,15    | —       | fF                 |
| Motional inductance                                               | $L_1$           | —       | 943     | —       | μH                 |
| Motional resistance                                               | $R_1$           | —       | 240     | —       | Ω                  |
| Input / Output capacitance                                        | $C_0$           | —       | 2,2     | —       | pF                 |
| <b>Temperature coefficient of frequency</b> <sup>1)</sup>         | $TC_f$          | —       | −0,03   | —       | ppm/K <sup>2</sup> |
| Turnover temperature                                              | $T_0$           | 25      | —       | 55      | °C                 |

<sup>1)</sup> Temperature dependence of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



|                       |                   |
|-----------------------|-------------------|
| <b>SAW Components</b> | <b>R 2702</b>     |
| <b>Resonator</b>      | <b>418,05 MHz</b> |

Data Sheet

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW CE AE PD**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.