




AUDIO FILTER AMPLIFIER

■ GENERAL DESCRIPTION


The NJM2127 is a dual audio filter amplifier for digital audio. It includes two-channel differential input amplifier, capacitors, and resistors for Low Pass Filter. It also includes standby function which applies to low consumption power design.

It is suitable for CD, CD-ROM, DVD, and any other digital audio equipments.

■ PACKAGE OUTLINE



NJM2127D



NJM2127M




NJM2127V

■ FEATURES

- Single Supply
- Operating Voltage ($V^+ = 4.5 \sim 5.5V$)
- Internal Differential Input Amplifier (Two channels)
- Internal C and R for LPF
- Standby Function
- Mute Function
- High S/N Ratio (95dB typ.)
- Bipolar Technology
- Package Outline DIP14, DMP14, SSOP14

■ PIN CONFIGURATION

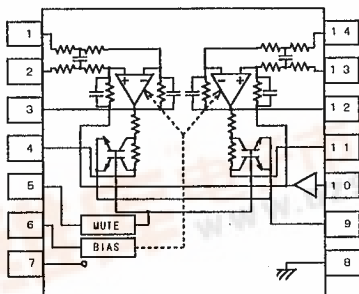

NJM2127D
NJM2127M
NJM2127V

PIN FUNCTION

- | | |
|------------|------------|
| 1: IN-1 | 8: GND |
| 2: IN+1 | 9: REF2 |
| 3: OUT1 | 10: REF1 |
| 4: MUTE1 | 11: MUTE 2 |
| 5: MUTE | 12: OUT2 |
| 6: STANDBY | 13: IN+2 |
| 7: V^+ | 14: IN-2 |

■ ABSOLUTE MAXIMUM RATINGS

($T_a = 25^\circ C$)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	12	V
Power Dissipation	P_D	(DIP8) 700 (DMP8) 300 (SSOP8) 300	mW
Operating Temperature Range	T_{OP}	$-25 \sim +75$	$^\circ C$
Storage Temperature Range	T_{STG}	$-40 \sim +125$	$^\circ C$

■ ELECTRICAL CHARACTERISTICS


($V^+=5V$, $f=1kHz$, $V_i=1.5V_{rms}$, $V_{ref1}=2.5V$, $V_{ref2}=2.5V$, $R_L=10k\Omega$, $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	Icc1		—	4.0	6.0	mA
Standby Operating Current	Icc2	6pin=GND	—	1	—	mA
Voltage Gain1	Gv1		-7.6	-6.6	-5.6	dB
Voltage gain2	Δ Gv2	f=20kHz, Difference from Gv1	-1.8	-0.4	0.6	dB
Voltage Gain3	Gv3	f=100kHz	—	-12.6	—	dB
Channel Balance	Δ Gv1	at Gv1	-0.5	0	0.5	dB
Total Harmonic Distortion	THD	Vo=0.2Vrms	—	0.015	0.05	%
S/N Ratio	S/N	CCIR/ARM, Rg=0 Ω Vi=1.5Vrms reference	89	95	—	dB
Channel Separation	CS	Measuring CH:no signal, CCIR/ARM Other CH:Vi=1.5Vrms	74	80	—	dB
Mute Attenuation	ATT	Vi=1.5Vrms, 5pin=V ⁺ , 6pin=GND	70	90	—	dB
Output Offset Voltage Drift	Voff	at Mute ON/OFF	-10	0	10	mV
Mute Voltage	Vmute	5pin, at Mute	3.5	—	—	V
Standby Voltage	Vstb	6pin, at Standby	—	—	1.5	V

■ APPLICATION CIRCUIT

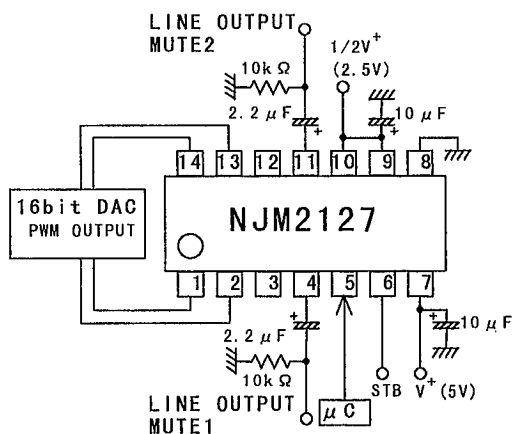


■ POWER ON TIMING CHART

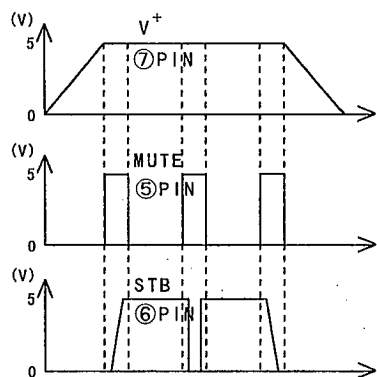


NJM2127

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage
($T_a=25^\circ\text{C}$)

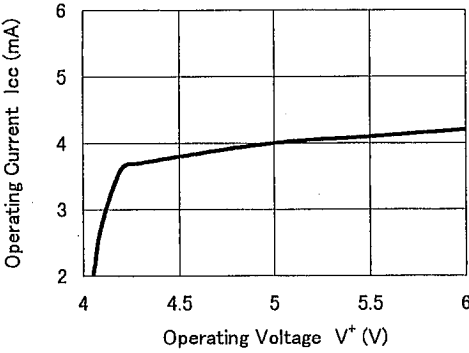


Operating Current vs. Temperature
($V^+=5\text{V}$)

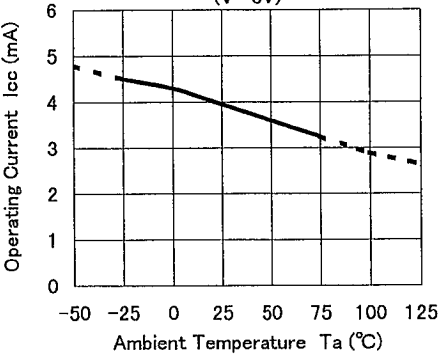


Voltage Gain vs. Frequency
($T_a=25^\circ\text{C}$)

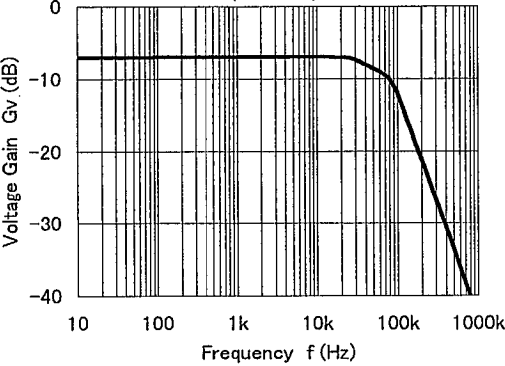


Voltage Gain1 vs. Temperature
($f=1\text{kHz}$)

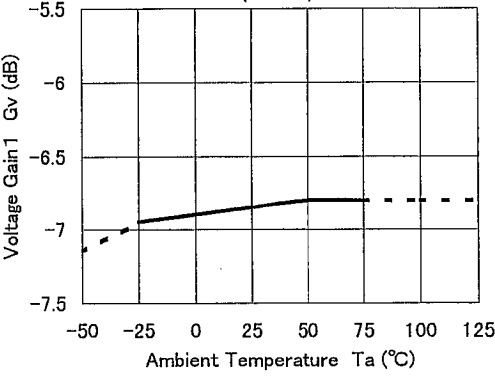

Voltage Gain2 vs. Temperature
($f=1\text{kHz}$)

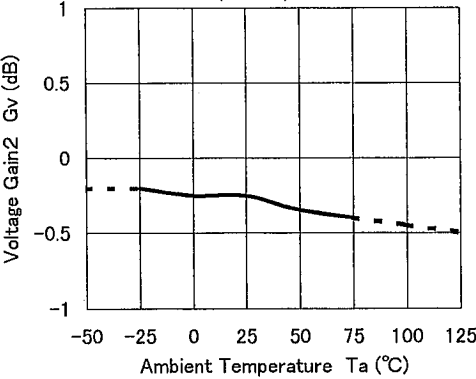


Voltage Gain3 vs. Temperature
($f=100\text{kHz}$)

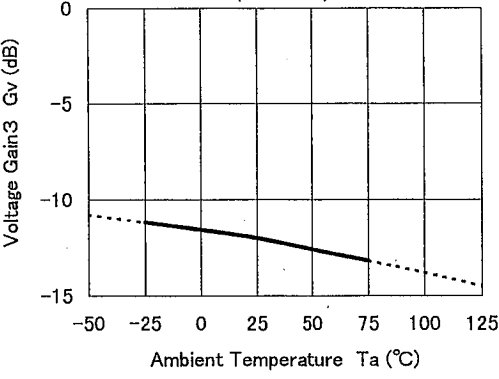


TYPICAL CHARACTERISTICS


Channel Balance vs. Temperature
($f=1\text{kHz}$)

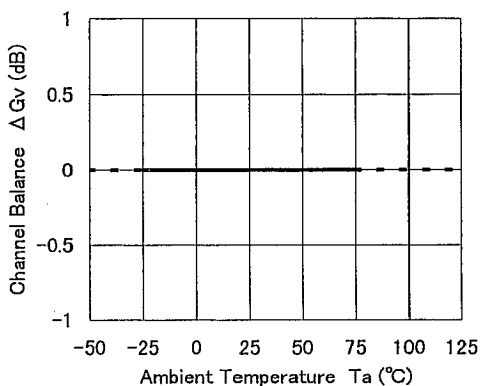


Total Harmonic Distortion vs. Output Voltage
($T_a=25^\circ\text{C}$)

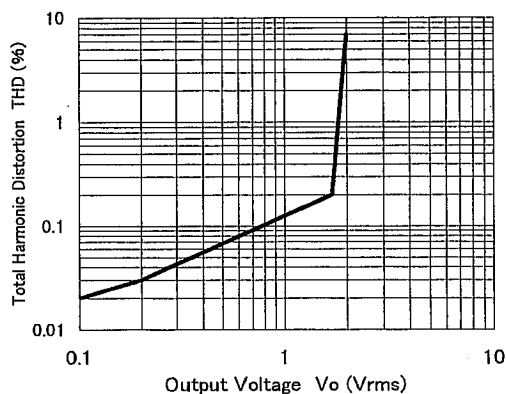


Total Harmonic Distortion vs. Temperature
($V_o=0.2\text{Vrms}$)

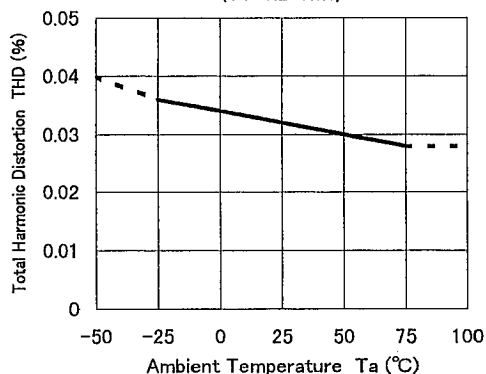


S/N Ratio vs. Temperature
($V^+=5\text{V}$)

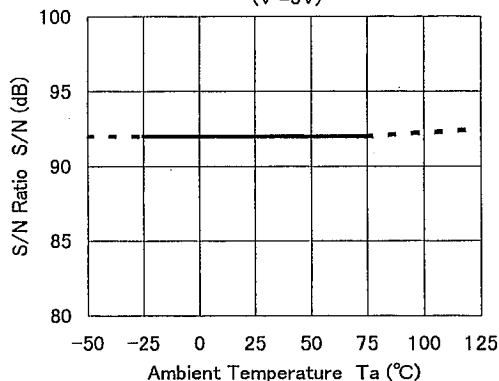

Channel Separation vs. Input Voltage
($T_a=25^\circ\text{C}$)






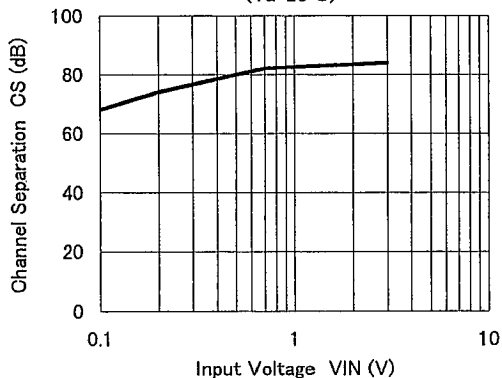


Channel Separation vs. Temperature
($V_{IN}=1.5\text{Vrms}$)

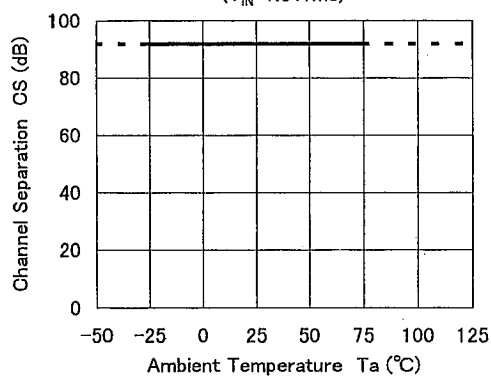

NJM2127

TYPICAL CHARACTERISTICS

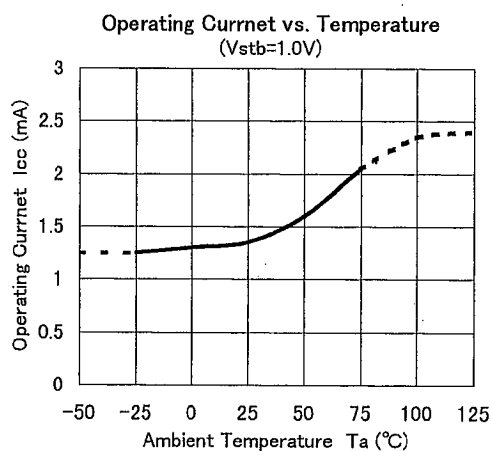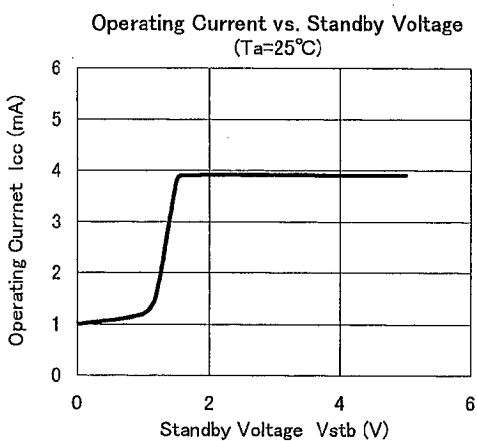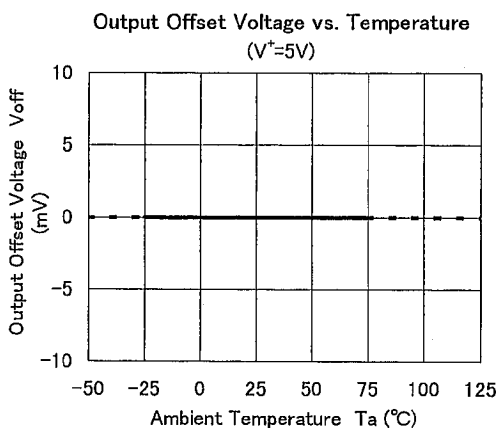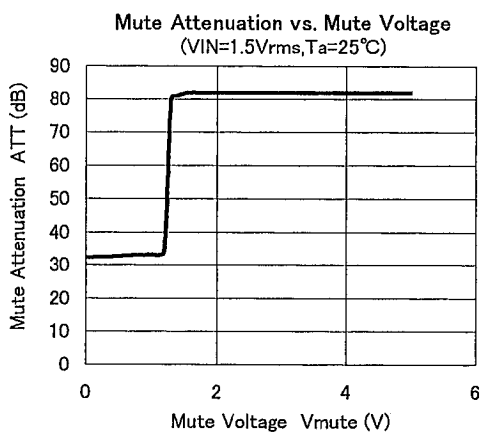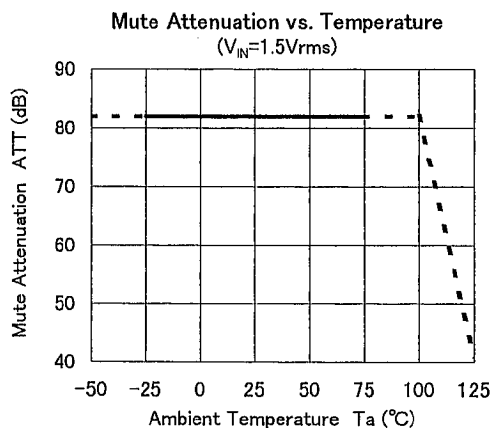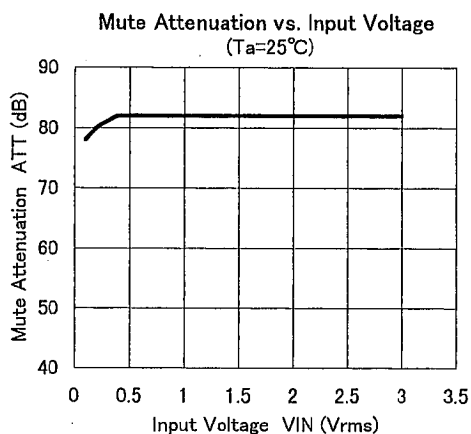

NJM2127

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.