

The RF Line NPN Silicon High-Frequency Transistor

... designed for wideband amplifier, driver or oscillator applications in military, mobile, and aircraft radio.

- Specified 28 Volt, 400 MHz Characteristics —
 - Output Power = 1.0 Watt
 - Power Gain = 15 dB Min
 - Efficiency = 45% Typ
- Emitter Ballast and Low Current Density for Improved MTBF
- Common Emitter for Improved Stability



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	30	Vdc
Collector-Base Voltage	V_{CBO}	40	Vdc
Emitter-Base Voltage	V_{EBO}	3.0	Vdc
Collector Current — Continuous	I_C	150	mAdc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	6.1 35	Watts mW/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	28.5	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_C = 10 \text{ mAdc}$, $I_B = 0$)	$V_{(BR)CEO}$	30	—	—	Vdc
Collector-Emitter Breakdown Voltage ($I_C = 5.0 \text{ mAdc}$, $V_{BE} = 0$)	$V_{(BR)CES}$	35	—	—	Vdc
Collector-Base Breakdown Voltage ($I_C = 0.1 \text{ mAdc}$, $I_E = 0$)	$V_{(BR)CBO}$	35	—	—	Vdc
Emitter-Base Breakdown Voltage ($I_E = 1.0 \text{ mAdc}$, $I_C = 0$)	$V_{(BR)EBO}$	3.0	—	—	Vdc
Collector Cutoff Current ($V_{CE} = 20 \text{ Vdc}$, $I_B = 0$)	I_{CEO}	—	—	1.0	mAdc

(continued)



ELECTRICAL CHARACTERISTICS — continued ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

ON CHARACTERISTICS

DC Current Gain ($I_C = 100\text{ mA dc}$, $V_{CE} = 10\text{ V dc}$)	h_{FE}	20	60	150	—
--	----------	----	----	-----	---

DYNAMIC CHARACTERISTICS


Current-Gain — Bandwidth Product ($I_C = 100\text{ mA dc}$, $V_{CE} = 20\text{ V dc}$, $f = 200\text{ MHz}$)	f_T	—	2.5	—	GHz
Output Capacitance ($V_{CB} = 28\text{ V dc}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{ob}	—	3.5	5.0	pF

FUNCTIONAL TESTS

Common-Emitter Amplifier Power Gain (1) ($V_{CC} = 28\text{ V dc}$, $P_{out} = 1.0\text{ W}$, $f = 400\text{ MHz}$)	G_{pe}	15	16	—	dB
Collector Efficiency ($V_{CC} = 28\text{ V dc}$, $P_{out} = 1.0\text{ W}$, $f = 400\text{ MHz}$)	η	—	45	—	%
Series Equivalent Input Impedance ($V_{CC} = 28\text{ V dc}$, $P_{out} = 1.0\text{ W}$, $f = 400\text{ MHz}$)	Z_{in}	—	$6.4 - j4.8$	—	Ohms
Series Equivalent Output Impedance ($V_{CC} = 28\text{ V dc}$, $P_{out} = 1.0\text{ W}$, $f = 400\text{ MHz}$)	Z_{out}	—	$75 - j45$	—	Ohms

NOTE:

1. Class C

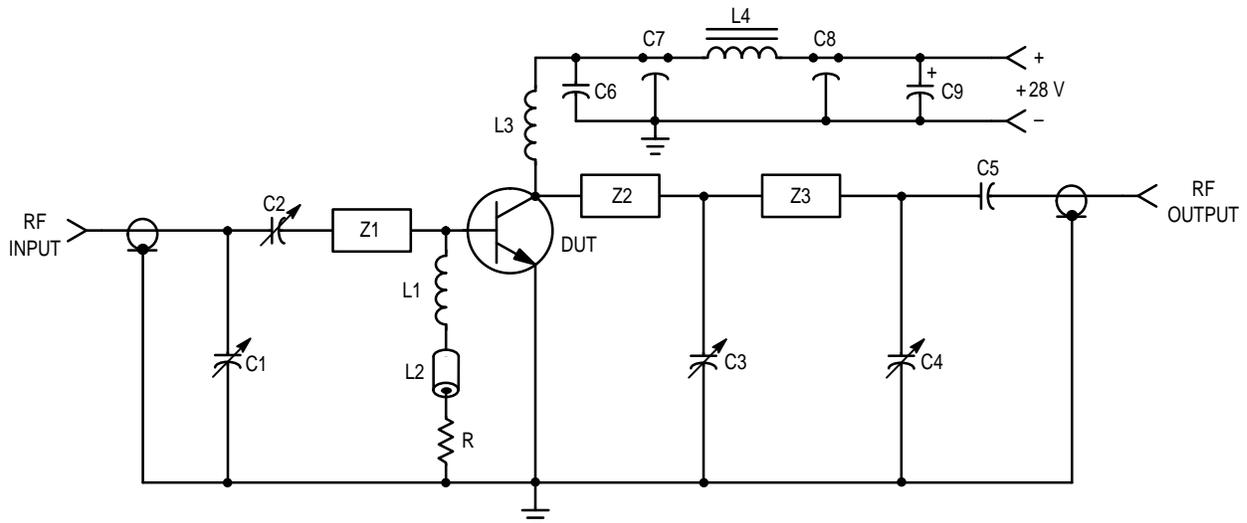



C1, C2, C4 — 1.0–20 pF JOHANSON 9063
 C3 — 1.0–10 pF JOHANSON
 C5 — 150 pF Chip
 C6 — 0.1 μF
 C7, C8 — 680 pF Feedthru
 C9 — 1.0 μF TANTALUM

L1, L3 — 5 Turns, AWG #20, 1/4" I.D.
 L2 — Ferrite Bead, FERROXCUBE
 No. 56-590-65/4B
 L4 — FERROXCUBE VK200-20/4B
 Input/Output Connectors — Type N
 Board — Glass Teflon, $\epsilon = 2.56$, $t = 0.062$ "

R — 4.7 Ohms, 1/4 W
 Z1 — 2.0" x 0.1" MICROSTRIP LINE
 Z2, Z3 — 2.6" x 0.1" MICROSTRIP LINE

Figure 1. 400 MHz Power Gain Test Circuit

PACKAGE DIMENSIONS

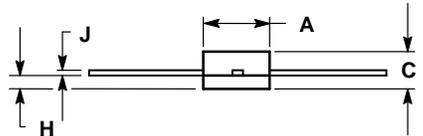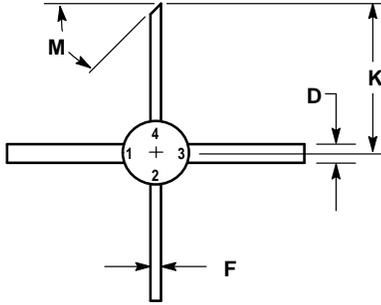

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.200	0.220	5.08	5.59
C	0.095	0.130	2.41	3.30
D	0.055	0.065	1.40	1.65
F	0.025	0.035	0.64	0.89
H	0.040	0.050	1.02	1.27
J	0.003	0.007	0.08	0.18
K	0.435	—	11.05	—
M	45 °REF		45 °REF	

- STYLE 1:
 PIN 1. EMITTER
 2. BASE
 3. EMITTER
 4. COLLECTOR

**CASE 305A-01
 ISSUE A**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.

ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.



MOTOROLA

MP5412D