

6A, 200V Ultrafast Diodes

The RURD620, and RURD620S are ultrafast diodes with soft recovery characteristics ($t_{rr} < 25\text{ns}$). They have low forward voltage drop and are silicon nitride passivated ion-implanted epitaxial planar construction.

These devices are intended for use as freewheeling/clamping diodes and rectifiers in a variety of switching power supplies and other power switching applications. Their low stored charge and ultrafast soft recovery minimize ringing and electrical noise in many power switching circuits, reducing power loss in the switching transistors.

Formerly developmental type TA49037.

Ordering Information

| PART NUMBER | PACKAGE | BRAND |
|-------------|---------|--------|
| RURD620 | TO-251 | RUR620 |
| RURD620S | TO-252 | RUR620 |

NOTE: When ordering, use the entire part number. Add the suffix, 9A, to obtain the TO-252 variant in tape and reel, i.e., RURD620S9A.

Symbol



Features


- Ultrafast with Soft Recovery <25ns
- Operating Temperature 175°C
- Reverse Voltage 200V
- Avalanche Energy Rated
- Planar Construction

Applications


- Switching Power Supplies
- Power Switching Circuits
- General Purpose

Packaging

JEDEC STYLE TO-251

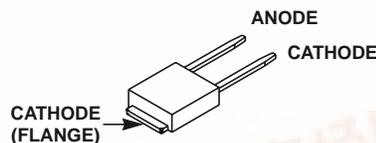

JEDEC STYLE TO-252



Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ Unless Otherwise Specified

| | RURD620 | RURD620S | UNITS |
|--|----------------|------------|-------|
| Peak Repetitive Reverse Voltage | V_{RRM} | 200 | V |
| Working Peak Reverse Voltage | V_{RWM} | 200 | V |
| DC Blocking Voltage | V_R | 200 | V |
| Average Rectified Forward Current $T_C = 160^\circ\text{C}$ | $I_{F(AV)}$ | 6 | A |
| Repetitive Peak Surge Current Square Wave, 20kHz | I_{FRM} | 12 | A |
| Nonrepetitive Peak Surge Current Halfwave, 1 phase, 60Hz | I_{FSM} | 60 | A |
| Maximum Power Dissipation | P_D | 45 | W |
| Avalanche Energy (See Figures 10 and 11) | E_{AVL} | 10 | mJ |
| Operating and Storage Temperature | T_{STG}, T_J | -65 to 175 | °C |
| Maximum Lead Temperature for Soldering | | | |
| Leads at 0.063in (1.6mm) from Case for 10s | T_L | 300 | 300°C |
| Package Body for 10s, See Tech Brief 334 | T_{PKG} | 260 | 260°C |



RURD620, RURD620S

Electrical Specifications $T_C = 25^\circ\text{C}$, Unless Otherwise Specified

| SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNITS |
|-----------------|--|-----|-----|------|---------------------------|
| V_F | $I_F = 6\text{A}$ | - | - | 1.0 | V |
| | $I_F = 6\text{A}, T_C = 150^\circ\text{C}$ | - | - | 0.83 | V |
| I_R | $V_R = 200\text{V}$ | - | - | 100 | μA |
| | $V_R = 200\text{V}, T_C = 150^\circ\text{C}$ | - | - | 500 | μA |
| t_{rr} | $I_F = 1\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$ | - | - | 25 | ns |
| | $I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$ | - | - | 30 | ns |
| t_a | $I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$ | - | 13 | - | ns |
| t_b | $I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$ | - | 6.5 | - | ns |
| Q_{RR} | $I_F = 6\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}$ | - | 20 | - | nC |
| C_J | $V_R = 10\text{V}, I_F = 0\text{A}$ | - | 30 | - | pF |
| $R_{\theta JC}$ | | - | - | 3.5 | $^\circ\text{C}/\text{W}$ |

DEFINITIONS

V_F = Instantaneous forward voltage ($p_w = 300\mu\text{s}$, $D = 2\%$).

I_R = Instantaneous reverse current.

t_{rr} = Reverse recovery time (See Figure 9), summation of $t_a + t_b$.

t_a = Time to reach peak reverse current (See Figure 9).

t_b = Time from peak I_{RM} to projected zero crossing of I_{RM} based on a straight line from peak I_{RM} through 25% of I_{RM} (See Figure 9).

Q_{RR} = Reverse recovery charge.

C_J = Junction Capacitance.

$R_{\theta JC}$ = Thermal resistance junction to case.

p_w = Pulse width.

D = Duty cycle.

Typical Performance Curves

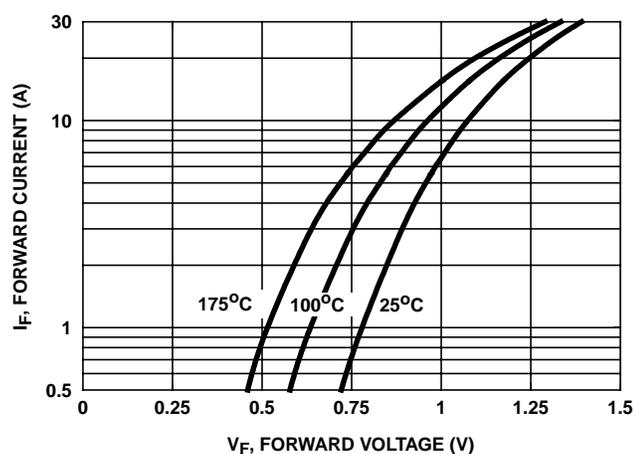


FIGURE 1. FORWARD CURRENT vs FORWARD VOLTAGE

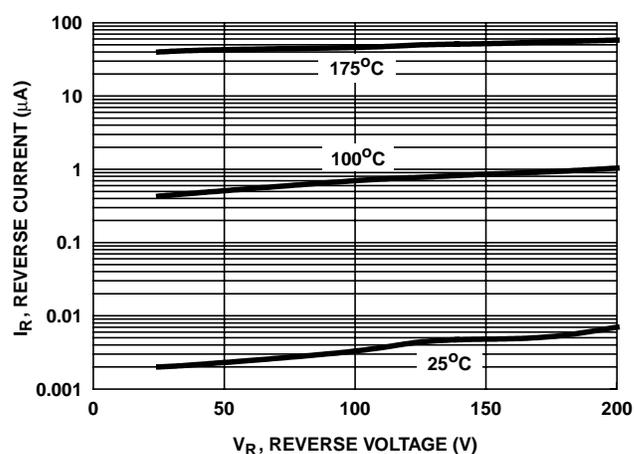


FIGURE 2. REVERSE CURRENT vs REVERSE VOLTAGE

RURD620, RURD620S

Typical Performance Curves (Continued)

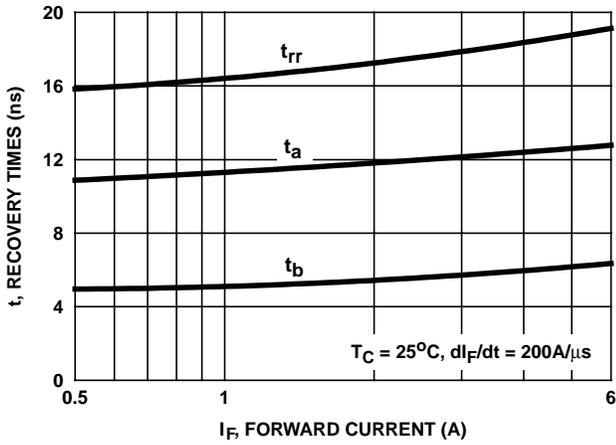


FIGURE 3. t_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT

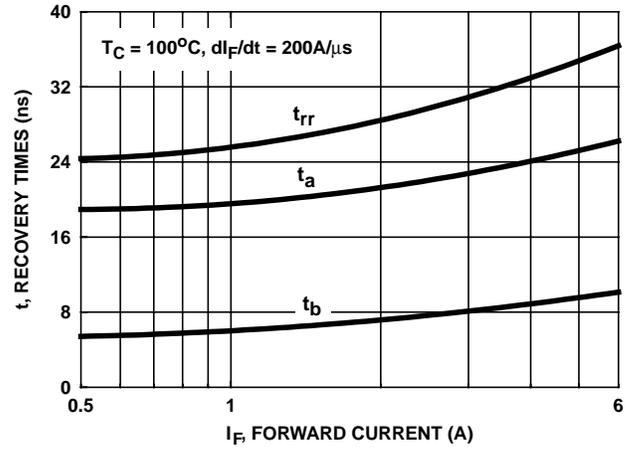


FIGURE 4. t_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT

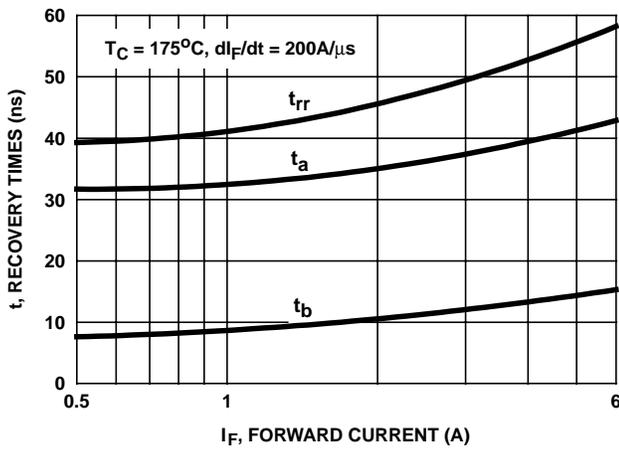


FIGURE 5. t_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT

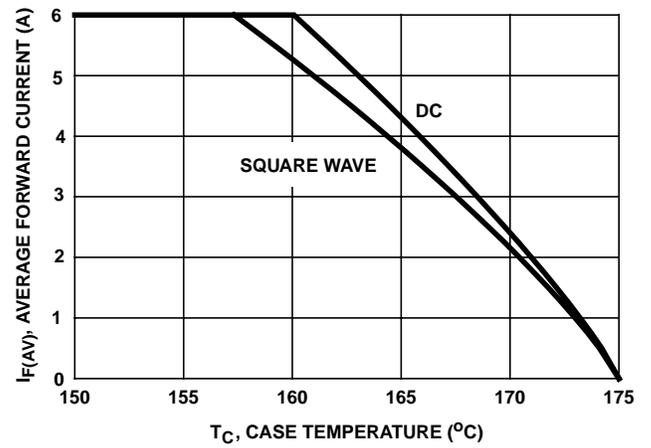


FIGURE 6. CURRENT DERATING CURVE

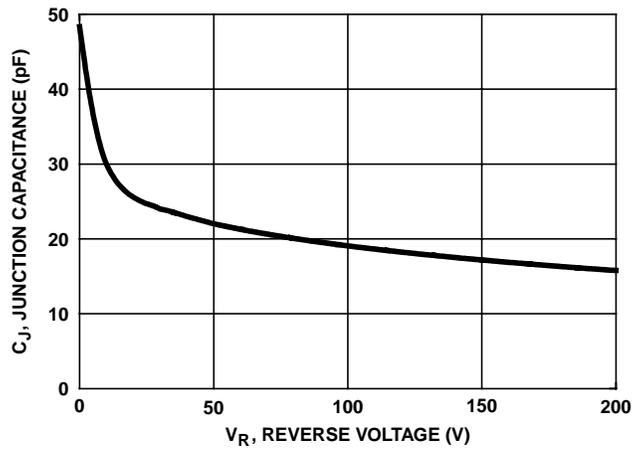


FIGURE 7. JUNCTION CAPACITANCE vs REVERSE VOLTAGE

Test Circuits and Waveforms

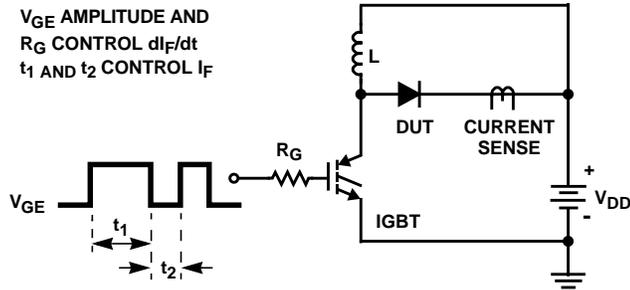


FIGURE 8. t_{rr} TEST CIRCUIT

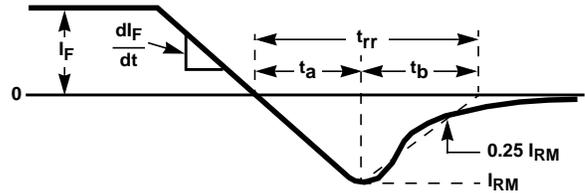


FIGURE 9. t_{rr} WAVEFORMS AND DEFINITIONS

$I = 1A$
 $L = 20mH$
 $R < 0.1\Omega$
 $E_{AVL} = 1/2Li^2 [V_{R(AVL)}/(V_{R(AVL)} - V_{DD})]$
 $Q_1 = IGBT (BV_{CES} > DUT V_{R(AVL)})$

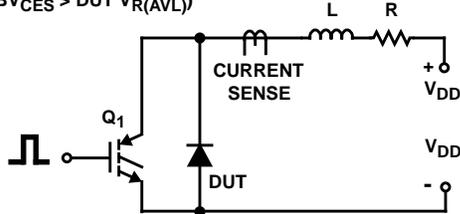


FIGURE 10. AVALANCHE ENERGY TEST CIRCUIT

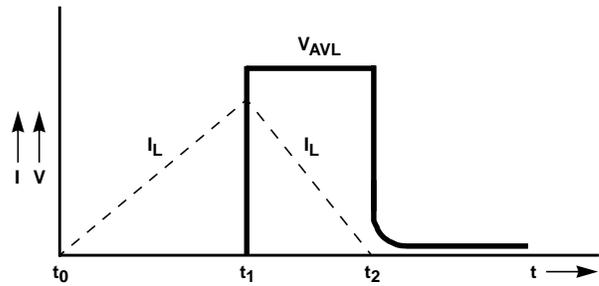


FIGURE 11. AVALANCHE CURRENT AND VOLTAGE WAVEFORMS

All Intersil semiconductor products are manufactured, assembled and tested under ISO9000 quality systems certification.

Intersil semiconductor products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see web site www.intersil.com