

1MBI600UB-120

IGBT Module U-Series 1200V / 600A 1 in one-package


■ Features

- High speed switching
- Voltage drive
- Low inductance module structure

■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply
- Industrial machines, such as Welding machines

■ Equivalent Circuit Schematic

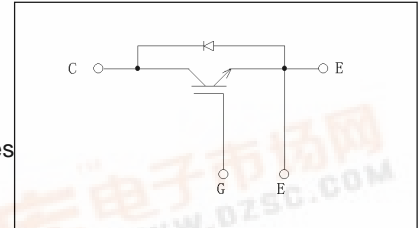

■ Maximum ratings and characteristics

● Absolute maximum ratings (at Tc=25°C unless otherwise specified)

Item	Symbol	Conditions	Rating	Unit			
Collector-Emitter voltage	V _{CES}		1200	V			
Gate-Emitter voltage	V _{GES}		±20	V			
Collector current	I _c	Continuous	T _c =25°C	800	A		
			T _c =80°C	600			
	I _{cp}	1ms	T _c =25°C	1600			
			T _c =80°C	1200			
	-I _c			600			
	-I _c pulse	1ms		1200			
Collector Power Dissipation	P _c	1 device	3570	W			
Junction temperature	T _j		+150	°C			
Storage temperature	T _{stg}		-40 to +125				
Isolation voltage	V _{iso}	AC:1min.	2500	VAC			
between terminal and copper base *1							
Screw Torque					Mounting *2	4.5	N·m
					Terminals *2	11.0	
	Terminals *2	1.7					

*1: All terminals should be connected together when isolation test will be done.

*2: Recommendable value : Mounting 3.5 to 4.5N·m(M6), Terminal 10.0 to 11.0 N·m(M8), 1.3 to 1.7 N·m(M4)

● Electrical characteristics (at Tj=25°C unless otherwise specified)

Item	Symbols	Conditions	Characteristics			Unit	
			Min.	Typ.	Max.		
Zero gate voltage collector current	I _{CEs}	V _{GE} =0V, V _{CE} =1200V	-	-	8.0	mA	
Gate-Emitter leakage current	I _{GES}	V _{CE} =0V, V _{GE} =±20V	-	-	1600	nA	
Gate-Emitter threshold voltage	V _{GE(th)}	V _{CE} =20V, I _c =600mA	4.5	6.5	8.5	V	
Collector-Emitter saturation voltage	V _{CE(sat)} (terminal)	V _{GE} =15V, I _c =600A	T _j =25°C	-	1.95	2.30	V
			T _j =125°C	-	2.20	-	
	V _{CE(sat)} (chip)		T _j =25°C	-	1.75	2.10	
			T _j =125°C	-	2.00	-	
Input capacitance	C _{ies}	V _{CE} =10V, V _{GE} =0V, f=1MHz	-	67	-	nF	
Turn-on time	t _{on}	V _{CC} =600V	-	0.36	1.20	μs	
	t _r	I _c =600A	-	0.21	0.60		
	t _{r(i)}	V _{GE} =±15V	-	0.03	-		
Turn-off time	t _{off}	R _G = 1.1 Ω	-	0.37	1.00	μs	
	t _f		-	0.07	0.30		
Forward on voltage	V _F (terminal)	V _{GE} =0V I _F =600A	T _j =25°C	-	1.80	2.10	V
			T _j =125°C	-	1.90	-	
	V _F (chip)		T _j =25°C	-	1.60	1.90	
			T _j =125°C	-	1.70	-	
Reverse recovery time	t _{rr}	I _F =600A	-	-	0.35	μs	
Lead resistance, terminal-chip*3	R lead		-	0.30	-	mΩ	

*3:Biggest internal terminal resistance among arm.

● Thermal resistance characteristics


Items	Symbols	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	R _{th(j-c)}	IGBT	-	-	0.035	°C/W
	R _{th(j-c)}	FWD	-	-	0.054	°C/W
Contact Thermal resistance	R _{th(c-f)} *4	With thermal compound	-	0.0063	-	°C/W

*4: This is the value which is defined mounting on the additional cooling fin with thermal compound.




■ Characteristics (Representative)


Collector current vs. Collector-Emittor voltage (typ.)
Tj= 25°C / chip

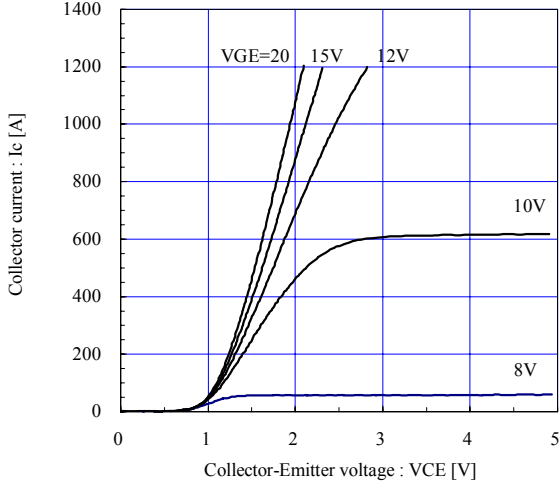


Collector current vs. Collector-Emittor voltage (typ.)
Tj= 125°C / chip

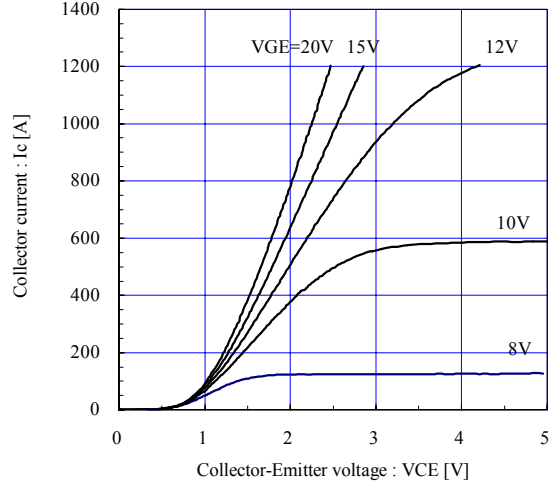


Collector current vs. Collector-Emittor voltage (typ.)
VGE=15V / chip

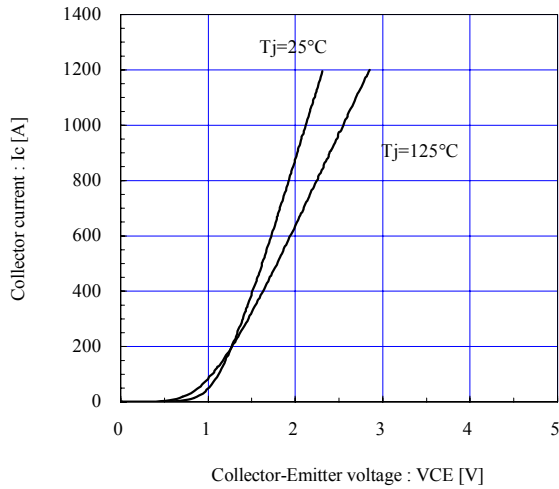


Collector-Emittor voltage vs. Gate-Emittor voltage (typ.)
Tj=25°C / chip

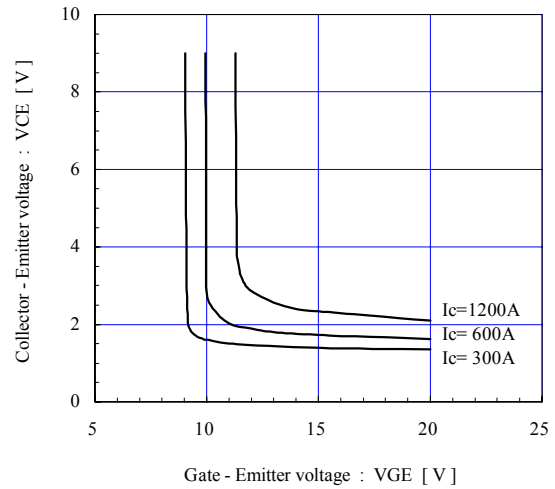


Capacitance vs. Collector-Emittor voltage (typ.)
VGE=0V, f= 1MHz, Tj= 25°C

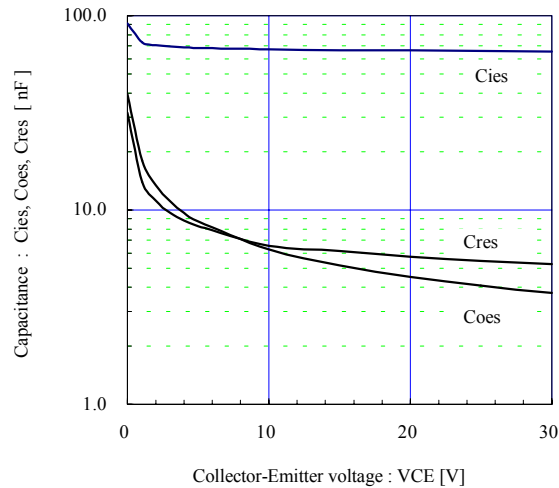


Dynamic Gate charge (typ.)
Vcc=600V, Ic=600A, Tj= 25°C

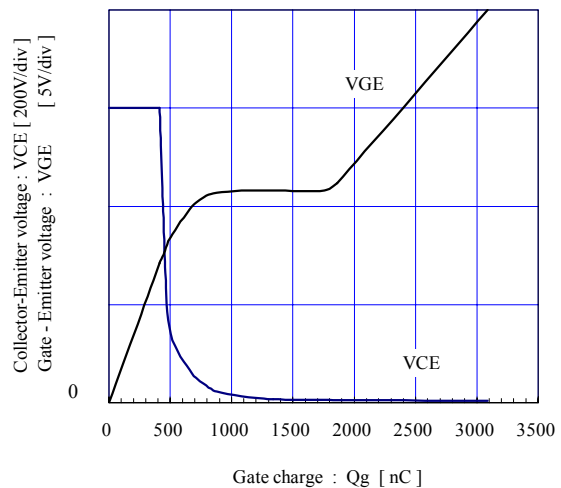


Switching time vs. Collector current (typ.)
 $V_{cc}=600V, V_{GE}=\pm 15V, R_g=1.1\Omega, T_j=25^\circ C$

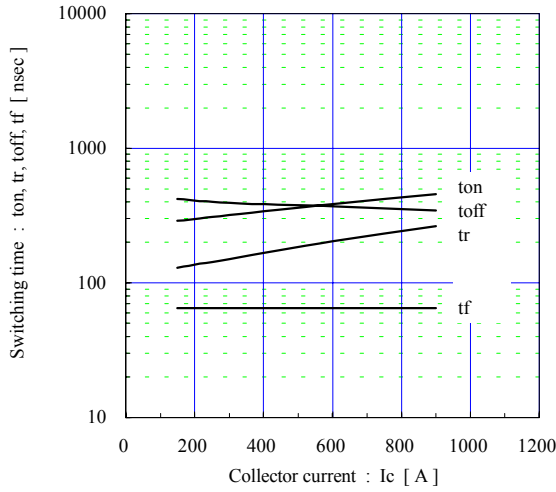


Switching time vs. Collector current (typ.)
 $V_{cc}=600V, V_{GE}=\pm 15V, R_g=1.1\Omega, T_j=125^\circ C$

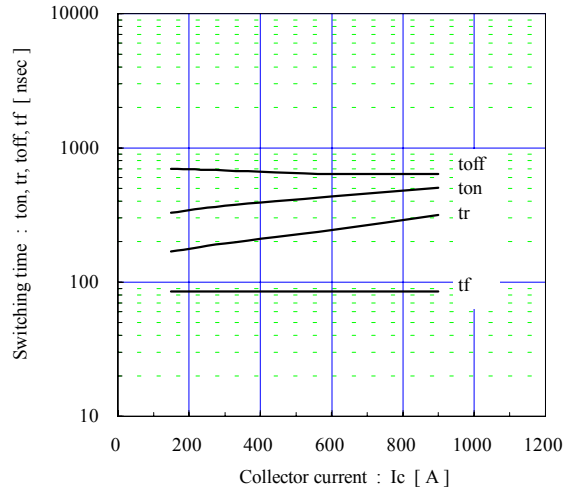


Switching time vs. Gate resistance (typ.)
 $V_{cc}=600V, I_c=600A, V_{GE}=\pm 15V, T_j=25^\circ C$

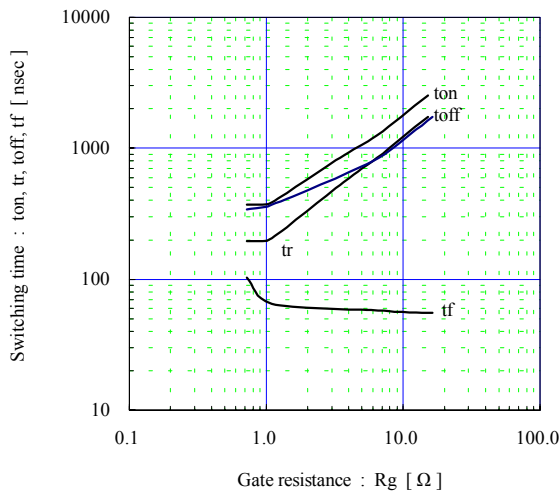


Switching loss vs. Collector current (typ.)
 $V_{cc}=600V, V_{GE}=\pm 15V, R_g=1.1\Omega$

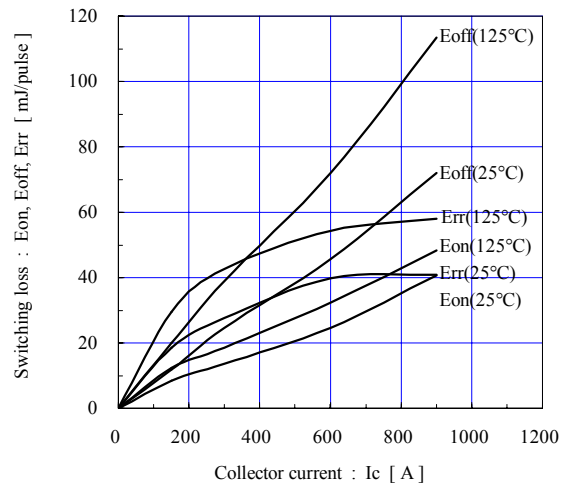


Switching loss vs. Gate resistance (typ.)
 $V_{cc}=600V, I_c=600A, V_{GE}=\pm 15V, T_j=125^\circ C$

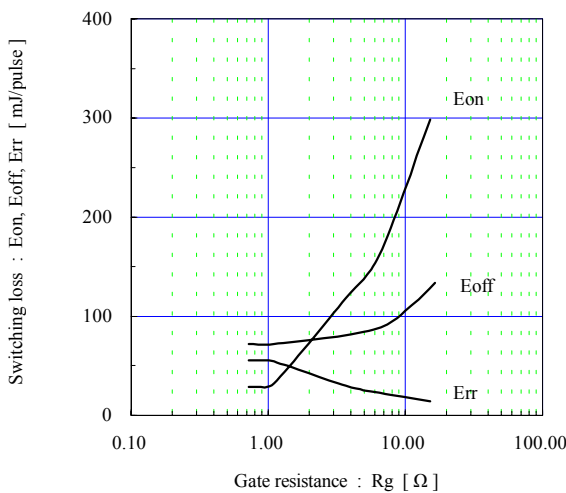


Reverse bias safe operating area (max.)
 $+V_{GE}=15V, -V_{GE} \le 15V, R_g \ge 1.1\Omega, T_j \le 125^\circ C$

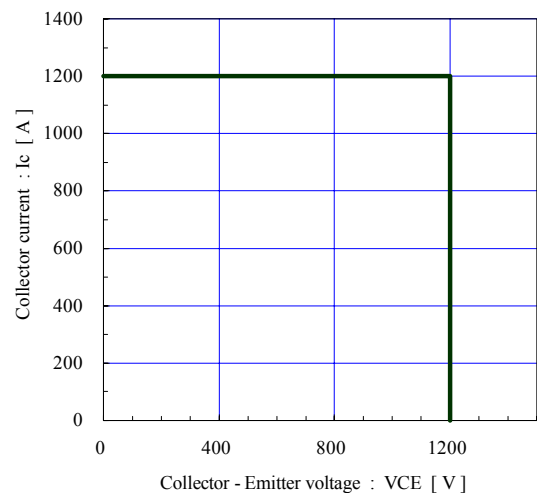


Forward current vs. Forward on voltage (typ.)
chip

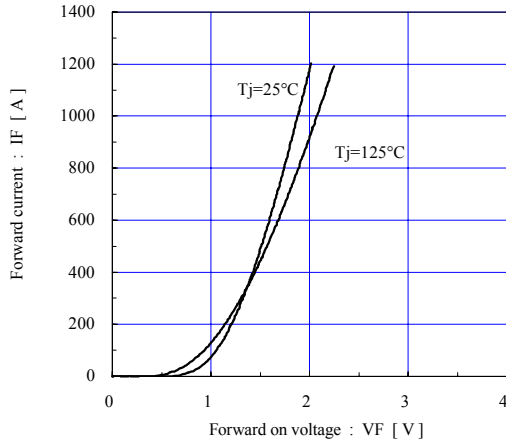

Reverse recovery characteristics (typ.)
 $V_{cc}=600\text{V}$, $V_{GE}=\pm 15\text{V}$, $R_g=1.1\Omega$

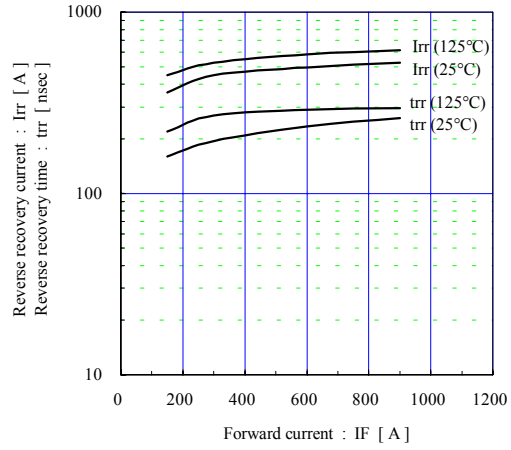

Transient thermal resistance (max.)

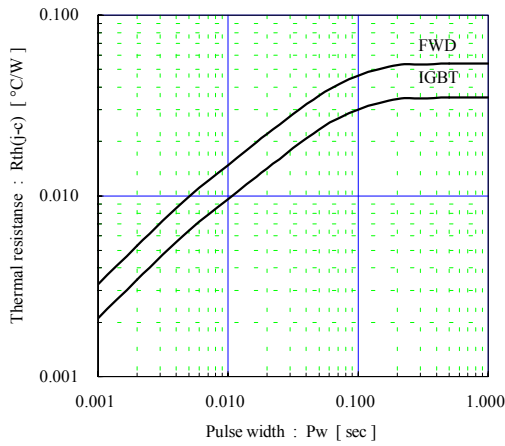

■ Outline Drawings, mm

M138

