



Type 730P

Vishay Sprague

Film Capacitors

High Frequency, Wrap-and-Fill, Metallized Polypropylene



FEATURES

- Excellent AC performance
- Low Power dissipation
- Low dielectric absorption
- Close tolerance
- High stability

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C

Voltage derating:

At + 105 °C, 50 % of + 85 °C rating

ESR: 20 kHz to 100 kHz

Capacitance Range: 0.022 μ F to 10.0 μ F

Capacitance Tolerance: $\pm$ 20 %, $\pm$ 10 %, $\pm$ 5 %

DC Voltage Rating: 100 WVDC to 630 WVDC

AC Voltage Rating: 70 Vrms to 275 Vrms, 60 Hz to 400 Hz

Dissipation Factor: 0.1 % maximum
Measure all units at 1000 Hz at + 25 °C

DC Voltage Test: 200 % of rated voltage for 2 minutes

AC Voltage Test: 130 % of rated rms voltage at 60 Hz for 15 seconds

Insulation Resistance: Measured at 100 WVDC after a 2 minute charge.

At + 25 °C: 200 000 Megohm - Microfarads or 400 000 Megohm minimum.

At + 85 °C: 10 000 Megohm - Microfarads or 20 000 Megohm minimum.

At + 105 °C: 1000 Megohm - Microfarads or 2000 Megohm minimum.

Vibration Test (Condition B): No mechanical damage, short, open or intermittent circuits.

DC Life Test: 150 % of rated voltage for 1000 hours

at + 85 °C. No open or short circuits. No visible damage.

Maximum Δ CAP $\pm$ 1.0 %

Minimum IR = 50 % of initial limit

Maximum DF = 0.12 %

Humidity Test: 95 % relative humidity at + 40 °C for 250 hours. No visible damage.

Maximum Δ CAP $\pm$ 1.0 %

Minimum IR = 20 % of initial limit

Maximum DF = 0.12 %

AC Life Test: 110 % of rated rms voltage at 60 Hz for 1000 hours at + 85 °C.

Maximum Δ CAP $\pm$ 5 %

Minimum IR = 50 % of initial limit

Maximum DF = 0.12 %


PHYSICAL CHARACTERISTICS

Lead Pull: 5 pounds (2.3 kilograms) for one minute. No physical damage.

Lead Bend: After three complete consecutive bends. No damage.

Marking: Sprague® trademark, type or part number, capacitance and voltage.

DIMENSIONS in inches [millimeters]

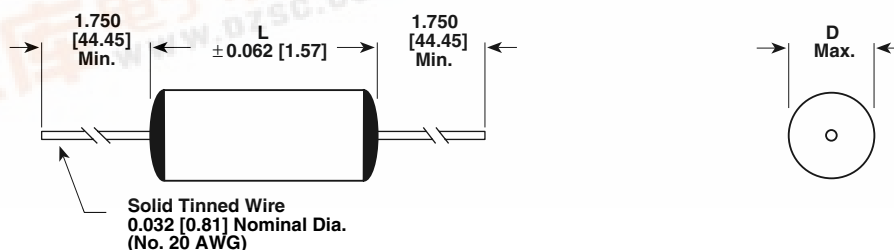

Not for New Design

Type 730P

Vishay Sprague

Film Capacitors
High Frequency, Wrap-and-Fill,
Metallized Polypropylene



STANDARD RATINGS in inches [millimeters]											
CAPACITANCE (μF)	PART NUMBER**	CASE SIZE		ESR (Milliohms) 20 kHz - 100 KHz	MAXIMUM RIPPLE CURRENT (Amps rms) at 20 kHz Case Temperature*** at						
		D	L		+ 25 °C	+ 35 °C	+ 45 °C	+ 55 °C	+ 65 °C	+ 75 °C	+ 85 °C
100 WVDC											
0.22	730P224X9100	0.275 [7.0]	0.75 [19.0]	-	Not applicable. These capacitance values are not customarily used in switched-mode power supplies.						
0.27	730P274X9100	0.298 [7.6]	0.75 [19.0]	-							
0.33	730P334X9100	0.324 [8.2]	0.75 [19.0]	-							
0.39	730P394X9100	0.347 [8.8]	0.75 [19.0]	-	-	-	-	-	-	-	
0.47*	730P474X9100	0.376 [9.6]	0.75 [19.0]	37.0	3.7	3.4	3.1	2.8	2.5	2.0	1.4
0.56	730P564X9100	0.321 [8.2]	1.00 [25.4]	35.0	3.9	3.6	3.3	2.9	2.6	2.1	1.5
0.68	730P684X9100	0.348 [8.8]	1.00 [25.4]	33.0	4.1	3.8	3.5	3.1	2.8	2.2	1.6
0.82	730P824X9100	0.377 [9.6]	1.00 [25.4]	31.0	4.3	4.0	3.6	3.2	2.9	2.3	1.7
1.0*	730P105X9100	0.421 [10.7]	1.00 [25.4]	26.0	5.5	5.1	4.7	4.2	3.6	2.8	2.6
1.2	730P125X9100	0.454 [11.5]	1.00 [25.4]	24.0	5.7	5.3	4.9	4.4	3.8	3.0	2.8
1.5	730P155X9100	0.500 [12.7]	1.00 [25.4]	20.0	6.1	5.5	5.1	4.6	4.0	3.2	3.1
1.8	730P185X9100	0.541 [13.7]	1.00 [25.4]	19.0	6.3	5.7	5.3	4.8	4.1	3.4	3.0
2.0	730P205X9100	0.486 [12.3]	1.25 [31.8]	18.0	6.5	6.0	5.5	4.9	4.2	3.5	3.2
2.2	730P225X9100	0.507 [12.9]	1.25 [31.8]	18.0	6.8	6.3	5.7	5.1	4.4	3.6	3.3
2.7	730P275X9100	0.554 [14.1]	1.25 [31.8]	17.0	7.1	6.5	6.0	5.3	4.6	3.7	3.4
3.0	730P305X9100	0.581 [14.8]	1.25 [31.8]	16.0	7.3	6.7	6.2	5.5	4.8	3.9	3.5
3.3	730P335X9100	0.606 [15.4]	1.25 [31.8]	16.0	7.4	6.8	6.4	5.6	4.9	4.0	3.6
3.9	730P395X9100	0.654 [16.6]	1.25 [31.8]	15.0	7.6	6.9	6.6	5.8	5.1	4.1	3.7
4.0	730P405X9100	0.537 [13.6]	1.75 [44.5]	15.0	7.8	7.0	6.7	5.9	5.2	4.2	3.8
4.7	730P475X9100	0.577 [14.7]	1.75 [44.5]	15.0	8.1	7.4	6.8	6.0	5.3	4.3	3.9
5.0	730P505X9100	0.593 [15.1]	1.75 [44.5]	14.0	8.3	7.6	7.0	6.2	5.4	4.4	4.0
5.6	730P565X9100	0.624 [15.8]	1.75 [44.5]	14.0	8.4	7.7	7.1	6.4	5.5	4.5	4.1
6.0	730P605X9100	0.644 [16.4]	1.75 [44.5]	14.0	8.5	7.8	7.2	6.5	5.6	4.6	4.2
6.8	730P685X9100	0.682 [17.3]	1.75 [44.5]	13.0	8.5	8.0	7.4	6.7	5.7	4.7	4.3
8.0	730P805X9100	0.735 [18.7]	1.75 [44.5]	13.0	8.6	8.3	7.7	6.8	6.0	4.8	4.4
8.2	730P825X9100	0.743 [18.9]	1.75 [44.5]	13.0	8.8	8.6	8.0	7.0	6.1	4.9	4.5
10.0	730P106X9100	0.815 [20.7]	1.75 [44.5]	12.0	9.0	9.0	8.5	7.6	6.6	5.4	4.9
250 WVDC											
0.1*	730P104X9250	0.279 [7.1]	0.75 [19.0]	-	Not applicable. These capacitance values are not customarily used in switched-mode power supplies.						
0.12	730P124X9250	0.300 [7.6]	0.75 [19.0]	-							
0.15	730P154X9250	0.327 [8.3]	0.75 [19.0]	-							
0.18	730P184X9250	0.353 [9.0]	0.75 [19.0]	-	-	-	-	-	-	-	
0.22*	730P224X9250	0.306 [7.8]	1.00 [25.4]	-	-	-	-	-	-	-	
0.27	730P274X9250	0.333 [8.5]	1.00 [25.4]	-	-	-	-	-	-	-	
0.33*	730P334X9250	0.362 [9.2]	1.00 [25.4]	-	-	-	-	-	-	-	
0.39	730P394X9250	0.389 [9.9]	1.00 [25.4]	-	-	-	-	-	-	-	
0.47*	730P474X9250	0.422 [10.7]	1.00 [25.4]	35.0	3.8	3.7	3.6	3.4	2.9	2.4	1.7
0.56	730P564X9250	0.464 [11.8]	1.00 [25.4]	33.0	3.9	3.8	3.7	3.5	3.1	2.5	1.8
0.68	730P684X9250	0.425 [10.8]	1.25 [31.8]	32.0	4.0	3.9	3.8	3.7	3.2	2.6	1.9
0.82	730P824X9250	0.471 [12.0]	1.25 [31.8]	31.0	4.2	4.1	4.0	3.9	3.4	2.8	2.0
1.0*	730P105X9250	0.513 [13.0]	1.25 [31.8]	28.0	4.4	4.4	4.4	4.4	4.3	3.5	3.2
1.2	730P125X9250	0.554 [14.1]	1.25 [31.8]	27.0	4.7	4.6	4.5	5.0	4.5	3.7	3.3
1.5	730P155X9250	0.613 [15.6]	1.25 [31.8]	26.0	5.1	5.0	4.9	5.4	4.7	3.9	3.5
1.8	730P185X9250	0.667 [17.0]	1.25 [31.8]	25.0	5.9	5.8	5.7	5.7	5.0	4.1	3.7
2.0*	730P205X9250	0.700 [17.8]	1.25 [31.8]	21.0	7.2	7.2	6.8	6.0	5.2	4.3	3.9
2.2	730P225X9250	0.610 [15.5]	1.75 [44.5]	20.0	8.4	7.5	7.0	6.3	5.4	4.5	4.1
2.7	730P275X9250	0.669 [17.0]	1.75 [44.5]	19.0	8.6	7.8	7.3	6.6	5.7	4.7	4.3
3.0	730P305X9250	0.703 [17.9]	1.75 [44.5]	18.0	9.0	8.3	7.6	6.8	5.9	4.8	4.4
3.3	730P335X9250	0.734 [18.6]	1.75 [44.5]	18.0	9.0	8.4	7.8	7.0	6.0	4.9	4.5
3.9	730P395X9250	0.794 [20.2]	1.75 [44.5]	17.0	9.0	8.5	8.0	7.2	6.2	5.0	4.6
4.0	730P405X9250	0.803 [20.4]	1.75 [44.5]	16.0	9.0	8.6	8.2	7.4	6.3	5.1	4.7
4.7	730P475X9250	0.866 [22.0]	1.75 [44.5]	16.0	9.0	8.8	8.5	7.7	6.6	5.3	4.9
5.0	730P505X9250	0.892 [22.7]	1.75 [44.5]	15.0	9.0	9.0	8.8	7.9	6.8	5.6	5.1
5.6	730P565X9250	0.941 [23.9]	1.75 [44.5]	15.0	9.0	9.0	8.9	8.0	7.0	5.8	5.3
6.0	730P605X9250	0.972 [24.7]	1.75 [44.5]	15.0	9.0	9.0	9.0	8.2	7.2	5.9	5.5
6.8	730P685X9250	0.882 [22.4]	2.25 [57.2]	15.0	9.0	9.0	9.0	8.4	7.4	6.0	5.6
8.0	730P805X9250	0.953 [24.2]	2.25 [57.2]	14.0	9.0	9.0	9.0	8.7	7.8	6.3	5.8
8.2	730P825X9250	0.964 [24.5]	2.25 [57.2]	14.0	9.0	9.0	9.0	8.8	7.9	6.4	5.9
10.0	730P106X9250	1.060 [26.9]	2.25 [57.2]	13.0	9.0	9.0	9.0	8.9	8.3	6.8	6.2

* These ratings are stocked.

** Part Numbers listed are for a capacitance tolerance of ± 10 %. To specify ± 20 % tolerance, change the "X9" in the Part Number to "X0"; for ± 5 %, from "X9" to "X5".

*** The peak current pulse capability of these capacitors is 10 amperes/μF. The maximum rate voltage change is 10 V/μS.



Not for New Design

Type 730P

Film Capacitors
High Frequency, Wrap-and-Fill,
Metallized Polypropylene

Vishay Sprague

STANDARD RATINGS in inches [millimeters]

CAPACITANCE (μF)	PART NUMBER**	CASE SIZE		ESR (Milliohms) 20 kHz - 100 KHz	MAXIMUM RIPPLE CURRENT (Amps rms) at 20 kHz Case Temperature*** at							
					D	L	+ 25 °C	+ 35 °C	+ 45 °C	+ 55 °C	+ 65 °C	+ 75 °C
		400 WVDC										
0.047	730P473X9400	0.258 [6.6]	0.75 [19.0]	-	Not applicable. These capacitance values are not customarily used in switched-mode power supplies.							
0.056	730P563X9400	0.275 [7.0]	0.75 [19.0]	-								
0.068	730P683X9400	0.297 [7.5]	0.75 [19.0]	-								
0.082	730P823X9400	0.320 [8.1]	0.75 [19.0]	-								
0.1*	730P104X9400	0.348 [8.8]	0.75 [19.0]	-								
0.12	730P124X9400	0.299 [7.6]	1.00 [25.4]	-								
0.15*	730P154X9400	0.328 [8.3]	1.00 [25.4]	-								
0.18	730P184X9400	0.353 [9.0]	1.00 [25.4]	-								
0.22	730P224X9400	0.385 [9.8]	1.00 [25.4]	-								
0.27	730P274X9400	0.421 [10.7]	1.00 [25.4]	-								
0.33	730P334X9400	0.469 [11.9]	1.00 [25.4]	-								
0.39	730P394X9400	0.503 [12.8]	1.00 [25.4]	-	-	-	-	-	-	-	-	
0.47*	730P474X9400	0.545 [13.8]	1.00 [25.4]	32.0	5.7	5.5	5.0	4.4	3.8	3.2	2.2	
0.56	730P564X9400	0.506 [12.9]	1.25 [31.8]	31.0	5.7	5.7	5.3	4.4	4.1	3.3	2.3	
0.68	730P684X9400	0.551 [14.0]	1.25 [31.8]	30.0	5.7	5.7	5.5	4.8	4.3	3.5	2.4	
0.82	730P824X9400	0.599 [15.2]	1.25 [31.8]	28.0	5.7	5.7	5.6	5.3	4.5	3.7	2.6	
1.0*	730P105X9400	0.655 [16.6]	1.25 [31.8]	27.0	5.7	5.7	5.7	5.7	5.7	4.7	4.3	
1.2	730P125X9400	0.712 [18.1]	1.25 [31.8]	26.0	6.3	6.2	6.0	5.9	5.8	4.9	4.5	
1.5	730P155X9400	0.658 [16.7]	1.75 [44.5]	25.0	7.0	6.9	6.7	6.6	6.5	5.2	4.7	
1.8	730P185X9400	0.716 [18.2]	1.75 [44.5]	23.0	8.0	7.9	7.8	7.7	6.8	5.5	5.0	
2.0*	730P205X9400	0.752 [19.1]	1.75 [44.5]	21.0	9.0	9.0	9.0	8.0	7.0	5.7	5.2	
2.2	730P225X9400	0.786 [20.0]	1.75 [44.5]	20.0	9.0	9.0	9.0	8.3	7.4	5.9	5.4	
2.7	730P275X9400	0.865 [22.0]	1.75 [44.5]	19.0	9.0	9.0	9.0	8.6	7.6	6.0	5.6	
3.0*	730P305X9400	0.909 [23.1]	1.75 [44.5]	17.0	9.0	9.0	9.0	9.0	7.9	6.4	5.9	
3.3	730P335X9400	0.951 [24.2]	1.75 [44.5]	16.0	9.0	9.0	9.0	9.0	8.1	6.6	6.3	
3.9	730P395X9400	1.031 [26.2]	1.75 [44.5]	15.0	9.0	9.0	9.0	9.0	8.3	6.8	6.5	
630 WVDC												
0.022*	730P223X9630	0.283 [7.2]	0.75 [19.0]	-	Not applicable. These capacitance values are not customarily used in switched-mode power supplies.							
0.027	730P273X9630	0.307 [7.8]	0.75 [19.0]	-								
0.033	730P333X9630	0.334 [8.5]	0.75 [19.0]	-								
0.039	730P393X9630	0.358 [9.1]	0.75 [19.0]	-								
0.047	730P473X9630	0.388 [9.9]	0.75 [19.0]	-								
0.056	730P563X9630	0.418 [10.6]	0.75 [19.0]	-								
0.068	730P683X9630	0.346 [8.8]	1.00 [25.4]	-								
0.082	730P823X9630	0.374 [9.5]	1.00 [25.4]	-								
0.1	730P104X9630	0.408 [10.4]	1.00 [25.4]	-								
0.12	730P124X9630	0.443 [11.3]	1.00 [25.4]	-								
0.15	730P154X9630	0.496 [12.6]	1.00 [25.4]	-								
0.18	730P184X9630	0.538 [13.7]	1.00 [25.4]	-								
0.22	730P224X9630	0.496 [12.6]	1.25 [31.8]	-								
0.27	730P274X9630	0.542 [13.8]	1.25 [31.8]	-								
0.33	730P334X9630	0.593 [15.1]	1.25 [31.8]	-								
0.39	730P394X9630	0.639 [16.2]	1.25 [31.8]	-	-	-	-	-	-	-	-	
0.47	730P474X9630	0.696 [17.7]	1.25 [31.8]	28.0	6.8	6.3	5.8	5.2	4.5	3.6	2.6	
0.56	730P564X9630	0.608 [15.4]	1.75 [44.5]	26.0	7.4	6.9	6.3	5.6	4.8	4.0	2.8	
0.68	730P684X9630	0.664 [16.9]	1.75 [44.5]	25.0	7.8	7.2	6.6	5.9	5.1	4.2	2.9	
0.82	730P824X9630	0.724 [18.4]	1.75 [44.5]	22.0	8.1	7.5	6.9	6.2	5.3	4.3	3.1	
1.0*	730P105X9630	0.794 [20.2]	1.75 [44.5]	18.0	8.6	7.9	7.3	6.5	5.6	4.6	3.6	

* These ratings are stocked.

** Part Numbers listed are for a capacitance tolerance of $\pm 10\%$. To specify $\pm 20\%$ tolerance, change the "X9" in the Part Number to "X0"; for $\pm 5\%$, from "X9" to "X5".

*** The peak current pulse capability of these capacitors is 10 amperes/ μ F. The maximum rate voltage change is 10 V/ μ S.

ORDERING INFORMATION

730P	224	X9		100
TYPE	CAPACITANCE	CAPACITANCE TOLERANCE		DC VOLTAGE RATING*
This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.		X0 = ± 20 % X9 = ± 10 % X5 = ± 5 %		This is expressed in volts.
* At + 85 °C, AC rms ratings for frequencies up to and including 400 Hz correspond to this table:				
WVDC	100	250	400	630
RATED rms VOLTS	70	175	275	275



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.