
	<h2 style="margin: 0;">TS4264</h2> <h3 style="margin: 0;">150mA Ultra Low Drop Out Voltage Regulator</h3>																		
<div style="display: flex; align-items: center;">  <div> <p>SOT-223</p> <p>Pin assignment:</p> <ol style="list-style-type: none"> 1. Input 2. Ground 3. Output </div> </div>	<p>High Input Voltage up to 45V</p> <p>Low Dropout Voltage 0.5V max.</p>																		
<h3>General Description</h3> <p>TS4264 is a 5V low-drop fixed-voltage regulator in an SOT-223 package. The IC regulates an input voltage in the range of $5.5V < V_{in} < 45V$ to $V_{out}(\text{rated}) = 5.0V$. The maximum output current is more than 150mA. This IC is designed with short circuit-proof and features temperature protection that disables the circuit at over-temperature.</p>																			
<h3>Features</h3> <ul style="list-style-type: none"> ✦ Fixed output voltage 5V ✦ Output voltage tolerance $\pm 2\%$ ✦ 150mA current capability ✦ Ultra low drop out voltage ✦ Very low current consumption ✦ Over temperature protection ✦ Short-circuit proof ✦ Reverse polarity proof ✦ Wide temperature range ✦ Suitable for use in automotive electronics 	<h3>Ordering Information</h3> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Part No.</th> <th>Operating Temp.</th> <th>Package</th> </tr> </thead> <tbody> <tr> <td>TS4264CW50</td> <td>-40 ~ 150 °C</td> <td>SOT-223</td> </tr> </tbody> </table> <h3>Pin Definition and Function</h3> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Pin</th> <th>Symbol</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Input</td> <td>Block to ground directly on IC with ceramic capacitor</td> </tr> <tr> <td>2</td> <td>Ground</td> <td>Ground</td> </tr> <tr> <td>3</td> <td>Output</td> <td>Block to ground with 10uF capacitor, ESR < 10Ω</td> </tr> </tbody> </table>	Part No.	Operating Temp.	Package	TS4264CW50	-40 ~ 150 °C	SOT-223	Pin	Symbol	Function	1	Input	Block to ground directly on IC with ceramic capacitor	2	Ground	Ground	3	Output	Block to ground with 10uF capacitor, ESR < 10Ω
Part No.	Operating Temp.	Package																	
TS4264CW50	-40 ~ 150 °C	SOT-223																	
Pin	Symbol	Function																	
1	Input	Block to ground directly on IC with ceramic capacitor																	
2	Ground	Ground																	
3	Output	Block to ground with 10uF capacitor, ESR < 10Ω																	
<h3>Block Diagram</h3>																			




Absolute Maximum Rating			
Parameter	Symbol	Values	Unit
Input Supply Voltage	V _{in}	-42 ~ 45	V
Operating Input Voltage	V _{in(opr)}	5.5 ~ 45	V
Output Voltage	V _{out}	-1 ~ 16	V
Power Dissipation	P _D	Internally Limited	W
Ground Current	I _{GND}	50	mA
Operating Junction Temperature Range	T _J	-40 ~ +150	°C
Storage Temperature Range	T _{STG}	-50 ~ +150	°C

Thermal Performance			
Parameter	Symbol	Values	Unit
Junction to Ambient	R _{θja}	80	°C/W
Junction to Case	R _{θjc}	18	

Electrical Characteristics					
V _{in} = 13.5V, -40 ≤ T _j ≤ +150, unless otherwise specified.					
Parameter	Conditions	Min	Typ	Max	Unit
Output Voltage	6V ≤ V _{in} ≤ 28V, 5mA ≤ I _o ≤ 100mA	4.9	5.0	5.1	V
Output Current Limited		150	--	--	mA
Line Regulation	6V ≤ V _{in} ≤ 28V, I _o =5mA	--	15	30	mV
Load Regulation	5mA ≤ I _o ≤ 100mA, V _{in} = 6V	--	--	90	mV
Dropout Voltage (note 1)	I _o =100mA	--	0.25	0.5	V
Current Consumption (I _q = I _{in} – I _{out})	I _o = 1mA	--	--	400	uA
	I _o = 100mA	--	10	15	mA
Temperature Stability	I _o =10mA	--	0.5	--	%
Power Supply Ripple Rejection	f = 100Hz, V _r = 0.5Vp-p	--	54	--	dB

Note 1: Drop voltage = V_{in} – V_{out}
(measured where V_{out} has dropped 100mV from the nominal value obtained at V_{in}= 13.5V)

Typical Application Circuit

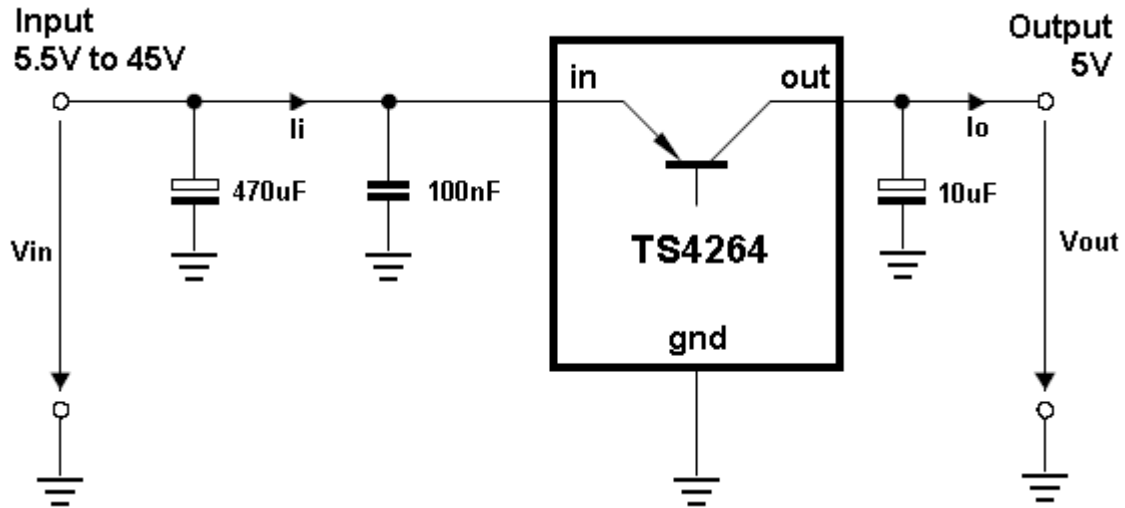

Application Information

Dimensioning Information on External Components

The input capacitor C_{in} is necessary for compensating line influences. Using a resistor of approx. 1Ω in series with C_{in} , the oscillating of input inductivity and input capacitance can be clamped. The output capacitor C_{out} is necessary for the stability of the regulating circuit. Stability is guaranteed at values $C_{out} \geq 10\mu F$ and an $ESR \leq 10\Omega$ within the operating temperature range.

Circuit Description

The control amplifier compares a reference voltage, which is kept highly precise by resistance adjustment, to a voltage that is proportional to the output voltage and drives the base of the series transistor via a buffer. Saturation control, working as a function of load current, prevents any over-saturation of the power element. The IC is additionally protected against overload, over temperature and reverse polarity

Electrical Characteristics Curve

Figure 1: dropout voltage vs output current

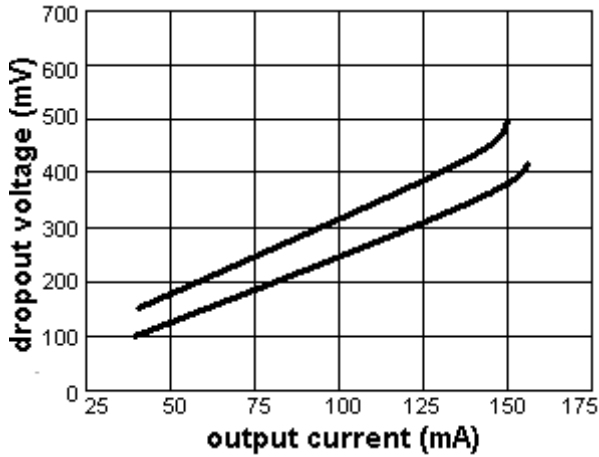


Figure 2: output current vs input voltage

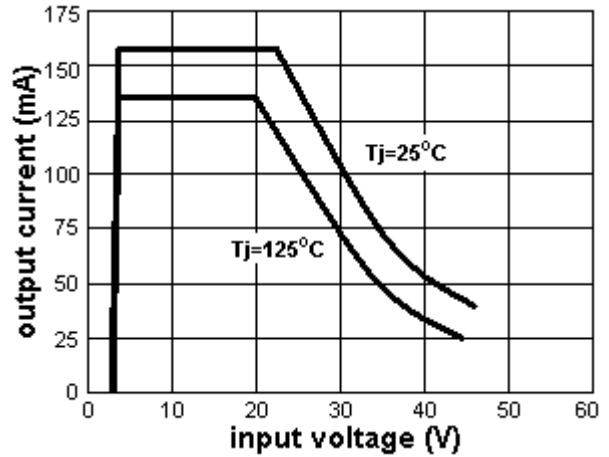


Figure 3: consumption vs output current

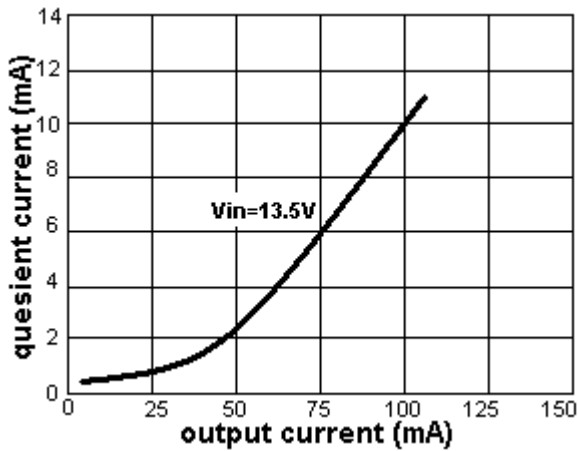


Figure 4: consumption vs output current

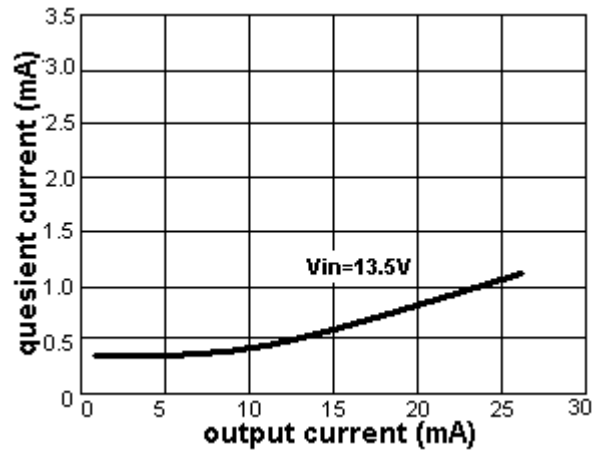


Figure 5: consumption vs input voltage



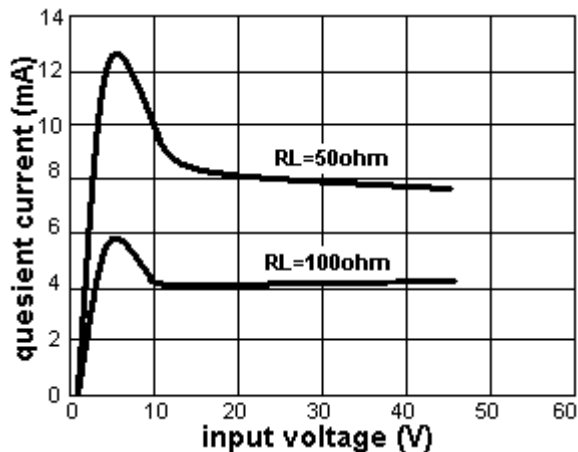


Figure 6: output voltage vs temp.

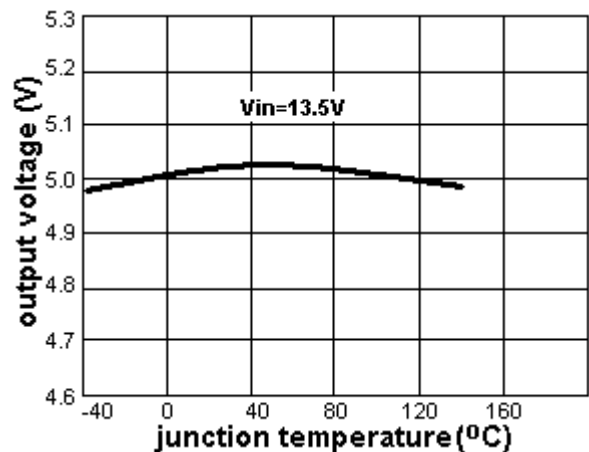

SOT-223 Mechanical Drawing

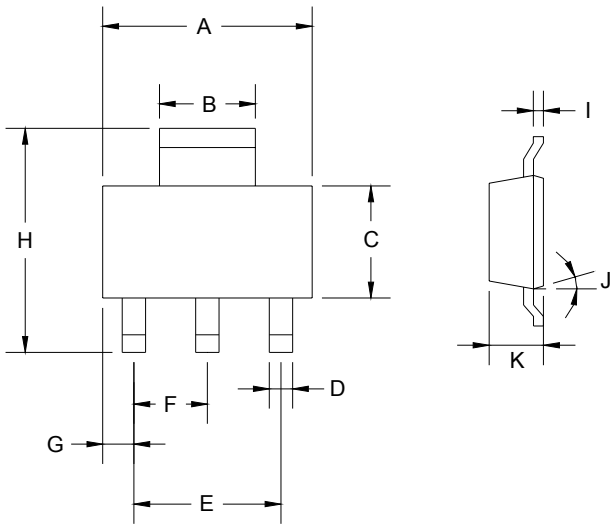

SOT-223 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.350	6.850	0.250	0.270
B	2.900	3.100	0.114	0.122
C	3.450	3.750	0.136	0.148
D	0.595	0.635	0.023	0.025
E	4.550	4.650	0.179	0.183
F	2.250	2.350	0.088	0.093
G	0.835	1.035	0.032	0.041
H	6.700	7.300	0.263	0.287
I	0.250	0.355	0.010	0.014
J	10°	16°	10°	16°
K	1.550	1.800	0.061	0.071