

SERIES **900** SWITCHES

SUB-MINIATURE SMT PUSHBUTTON SWITCHES


**SPECIFICATIONS**

Rating:	100mA @ 50 VDC
Mechanical Life:	50,000 cycles typical
Contact Resistance:	80mΩ max. typical @ 2-4 VDC 100mA
Insulation Resistance:	100MΩ min.
Dielectric Strength:	>1,000 Vrms at sea level
Operating Force:	50 ± 25 gf

MATERIALS

Housing:	4/6 Nylon
Actuator:	6T Nylon
Cover:	Stainless steel
Contacts:	Silver plated phosphor bronze
Terminals:	Silver plated brass
Spring:	Stainless steel

HOW TO ORDER


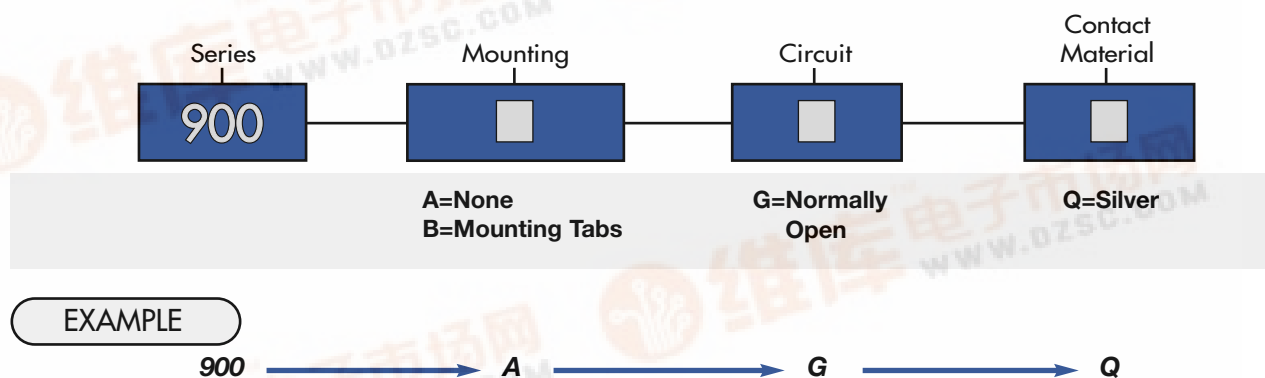


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




SERIES 900 SWITCHES

SUB-MINIATURE SMT PUSHBUTTON SWITCHES

P.C. MOUNTING

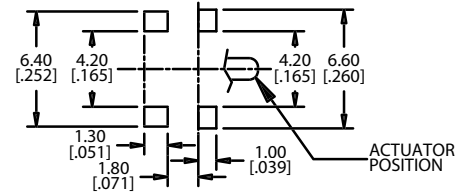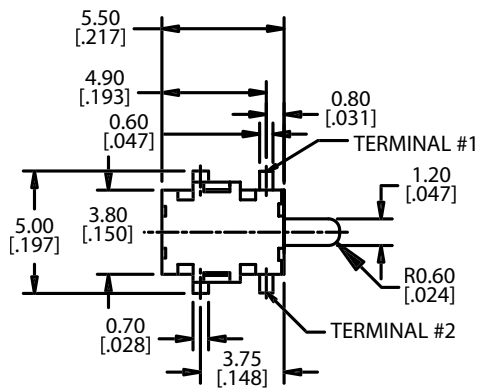


Schematic

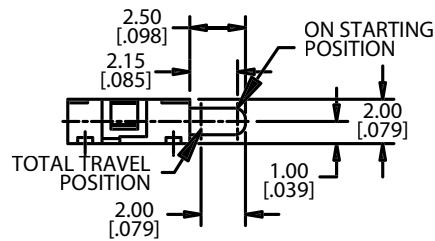


P.C. MOUNTING



WITH MOUNTING TABS

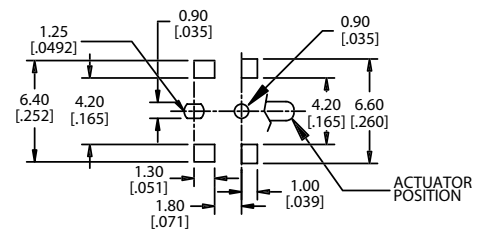

Schematic



900 SMT TAPE AND REEL

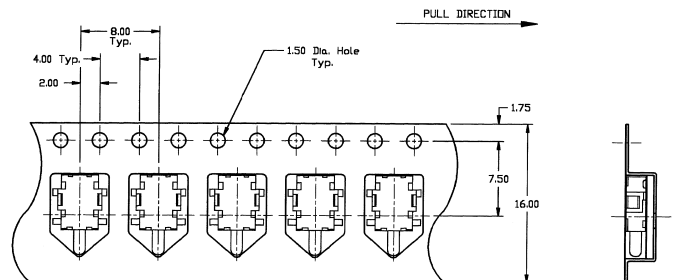

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.