



Three Phase AC Controller Modules

$$I_{RMS} = 3 \times 60 \text{ A}$$

$$V_{RRM} = 800-1600 \text{ V}$$

Preliminary data

V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V	Type
800	800	VWO 60-08io7
1200	1200	VWO 60-12io7
1400	1400	VWO 60-14io7
1600	1600	VWO 60-16io7

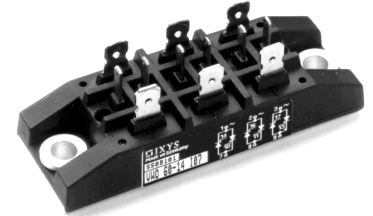

Symbol	Test Conditions	Maximum Ratings
I_{RMS}	$T_K = 85^\circ\text{C}$, 50 - 400 Hz (per phase)	60 A
I_{TRMS}	$T_{VJ} = T_{VJM}$	43 A
I_{TAVM}	$T_K = 85^\circ\text{C}$; (180° sine)	27 A
I_{TSM}	$T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine	550 A
	$V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz), sine	600 A
	$T_{VJ} = T_{VJM}$; $t = 10 \text{ ms}$ (50 Hz), sine	500 A
	$V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz), sine	550 A
I^2t	$T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine	1520 A ² s
	$V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz), sine	1520 A ² s
	$T_{VJ} = T_{VJM}$; $t = 10 \text{ ms}$ (50 Hz), sine	1250 A ² s
	$V_R = 0$; $t = 8.3 \text{ ms}$ (60 Hz), sine	1250 A ² s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$; $f = 50 \text{ Hz}$, $t_p = 200 \mu\text{s}$ $V_D = 2/3 V_{DRM}$ $I_G = 0.45 \text{ A}$ $di_G/dt = 0.45 \text{ A}/\mu\text{s}$	repetitive, $I_T = 25 \text{ A}$ 150 A/ μs
		non repetitive, $I_T = I_{TAVM}$ 500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$; $V_{DR} = 2/3 V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	1000 V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$; $t_p = 30 \mu\text{s}$	10 W
	$I_T = I_{TAVM}$; $t_p = 300 \mu\text{s}$	5 W
P_{GAVM}		0.5 W
V_{RGM}		10 V
T_{VJ}		-40...+125 °C
T_{VJM}		125 °C
T_{stg}		-40...+125 °C
V_{ISOL}	50/60 Hz, RMS; $t = 1 \text{ min}$	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$; $t = 1 \text{ s}$	3000 V~
M_d	Mounting torque (M5)	5 ± 15 % Nm
	(10-32 UNF)	44 ± 15 % lb.in.
Weight	typ.	110 g

Features

- Thyristor controller for AC (circuit W3C acc. to IEC) for mains frequency
- Package with metal base plate
- Isolation voltage 3000 V~
- Planar passivated chips
- UL applied
- 1/4" fast-on power terminals

Applications

- Switching and control of three phase AC circuits
- Softstart AC motor controller
- Solid state switches
- Light and temperature control


Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density
- Light weight and compact

Data according to IEC 60747 refer to a single thyristor/diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions

Symbol	Test Conditions	Characteristic Values	
I_D, I_R	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	$\leq$	5 mA
V_T	$I_T = 45 \text{ A}; T_{VJ} = 25^\circ\text{C}$	$\leq$	1.45 V
V_{T0}	For power-loss calculations only		0.85 V
r_T			11 mΩ
V_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	$\leq$	1.5 V
	$T_{VJ} = -40^\circ\text{C}$	$\leq$	1.6 V
I_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	$\leq$	100 mA
	$T_{VJ} = -40^\circ\text{C}$	$\leq$	200 mA
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	$\leq$	0.2 V
I_{GD}		$\leq$	5 mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10 \mu\text{s}$ $I_G = 0.45 \text{ A}; di_G/dt = 0.45 \text{ A}/\mu\text{s}$	$\leq$	450 mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6 \text{ V}; R_{GK} = \infty$	$\leq$	200 mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.45 \text{ A}; di_G/dt = 0.45 \text{ A}/\mu\text{s}$	$\leq$	2 μs
t_q	$T_{VJ} = T_{VJM}; I_T = 20 \text{ A}; t_p = 200 \mu\text{s}; di/dt = -10 \text{ A}/\mu\text{s}$ $V_R = 100 \text{ V}; dv/dt = 15 \text{ V}/\mu\text{s}; V_D = 2/3 V_{DRM}$	typ.	150 μs
R_{thJC}	per thyristor; sine 180°el		0.9 K/W
	per module		0.15 K/W
R_{thJK}	per thyristor; sine 180°el		1.1 K/W
	per module		0.183 K/W
d_s	Creeping distance on surface		16.1 mm
d_A	Creepage distance in air		6.0 mm
a	Max. allowable acceleration		50 m/s ²

Dimensions in mm (1 mm = 0.0394")

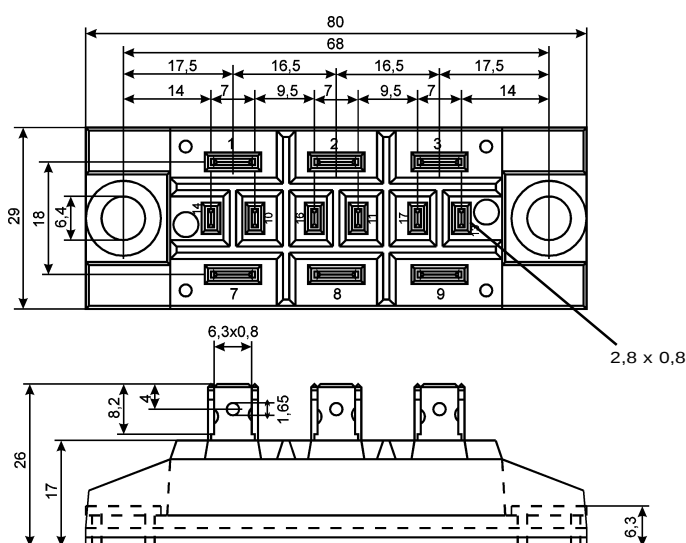

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com