


74ACT11623 OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS

SCAS059A – D2957, JULY 1987 – REVISED APRIL 1993

查询 74ACT11623DW 供应商

- Local Bus-Latch Capability
- Inputs Are TTL-Voltage Compatible
- Flow-Through Architecture Optimizes PCB Layout
- Center-Pin V_{CC} and GND Configurations Minimize High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1- μ m Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic Small-Outline Packages and Standard Plastic 300-mil DIPs

DW OR NT PACKAGE
(TOP VIEW)

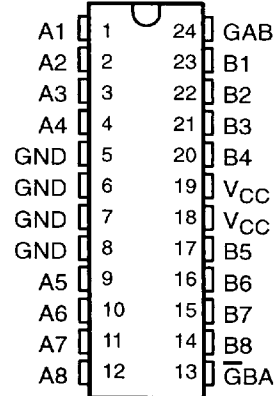

description

The 74ACT11623 is designed for asynchronous two-way communication between data buses. The control function implementation allows for maximum flexibility in timing.

The device allows data transmission from the A bus to the B bus or from the B bus to the A bus depending upon the logic levels at the enable inputs (\overline{GBA} and GAB). The enable inputs can be used to disable the device so that the buses are effectively isolated.

The dual-enable configuration gives these devices the capability to store data by simultaneous enabling of \overline{GBA} and GAB. Each output reinforces its input in this transceiver configuration. Thus, when both control inputs are enabled and all other data sources to the two sets of bus lines are at high impedance, both sets of bus lines (16 in all) will remain at their last states. The 8-bit codes appearing on the two sets of buses will be identical for the 74ACT11623.

The 74ACT11623 is characterized for operation from – 40°C to 85°C.

FUNCTION TABLE

| ENABLE INPUTS | | OPERATION |
|------------------|-----|-------------------------------------|
| \overline{GBA} | GAB | |
| L | L | B data to A bus |
| H | H | A data to B bus |
| H | L | Isolation |
| L | H | B data to A bus, A data to B bus |

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1993, Texas Instruments Incorporated


2-1

8961723 0105076 016

74ACT11623 OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS


SCAS059A – D2957, JULY 1987 – REVISED APRIL 1993

查询“74ACT11623DW”供应商
logic symbol†

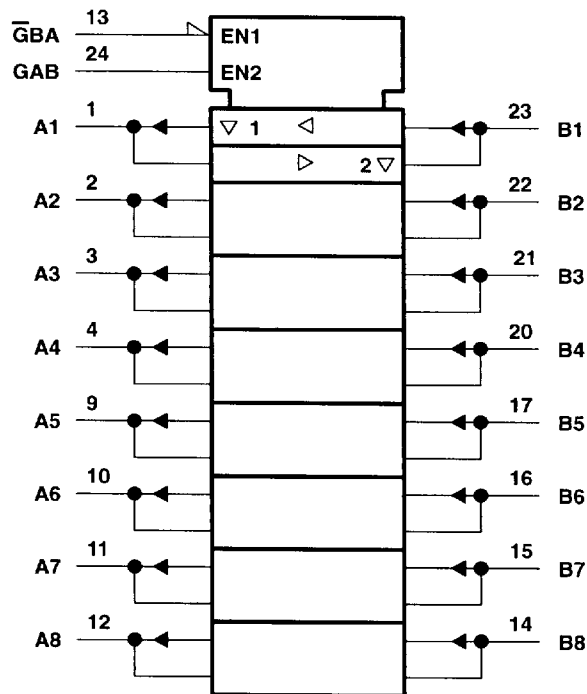

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

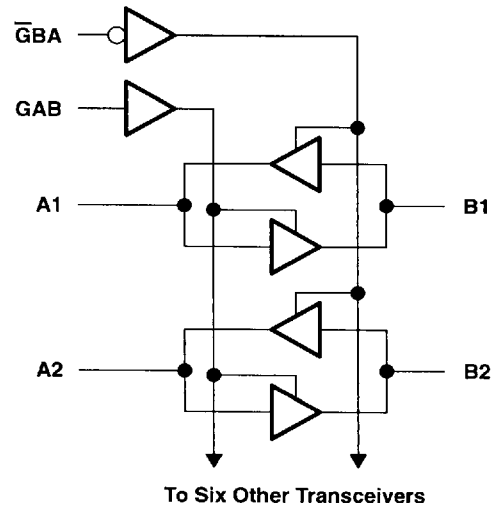

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

| | |
|--|----------------------------|
| Supply voltage range, V_{CC} | –0.5 V to 7 V |
| Input voltage range, V_I (see Note 1) | –0.5 V to $V_{CC} + 0.5$ V |
| Output voltage range, V_O (see Note 1) | –0.5 V to $V_{CC} + 0.5$ V |
| Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$) | ± 20 mA |
| Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$) | ± 50 mA |
| Continuous output current, I_O ($V_O = 0$ to V_{CC}) | ± 50 mA |
| Continuous current through V_{CC} or GND | ± 200 mA |
| Storage temperature range | –65°C to 150°C |

‡ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

74ACT11623
OCTAL BUS TRANSCEIVER
WITH 3-STATE OUTPUTS

SCAS059A – D2957, JULY 1987 – REVISED APRIL 1993

查询 74ACT11623DW 供应商

recommended operating conditions

| | | MIN | MAX | UNIT |
|---------------------|------------------------------------|-----|----------|------|
| V_{CC} | Supply voltage | 4.5 | 5.5 | V |
| V_{IH} | High-level input voltage | 2 | | V |
| V_{IL} | Low-level input voltage | | 0.8 | V |
| V_I | Input voltage | 0 | V_{CC} | V |
| V_O | Output voltage | 0 | V_{CC} | V |
| I_{OH} | High-level output current | | –24 | mA |
| I_{OL} | Low-level output current | | 24 | mA |
| $\Delta t/\Delta v$ | Input transition rise or fall rate | 0 | 10 | ns/V |
| T_A | Operating free-air temperature | –40 | 85 | °C |

electrical characteristics over recommended operating free-air temperature range

| PARAMETER | TEST CONDITIONS | V_{CC} | $T_A = 25^\circ\text{C}$ | | | MIN | MAX | UNIT |
|--------------------|---|-----------------------|--------------------------|-----|-----------|------|---------|---------------|
| | | | MIN | TYP | MAX | | | |
| V_{OH} | $I_{OH} = -50\ \mu\text{A}$ | 4.5 V | 4.4 | | | 4.4 | | V |
| | | 5.5 V | 5.4 | | | 5.4 | | |
| | $I_{OH} = -24\ \text{mA}$ | 4.5 V | 3.94 | | | 3.8 | | |
| | | 5.5 V | 4.94 | | | 4.8 | | |
| | $I_{OH} = -75\ \text{mA}^\dagger$ | 5.5 V | | | | 3.85 | | |
| V_{OL} | $I_{OL} = 50\ \mu\text{A}$ | 4.5 V | | | 0.1 | | 0.1 | V |
| | | 5.5 V | | | 0.1 | | 0.1 | |
| | $I_{OL} = 24\ \text{mA}$ | 4.5 V | | | 0.36 | | 0.44 | |
| | | 5.5 V | | | 0.36 | | 0.44 | |
| | $I_{OL} = 75\ \text{mA}^\dagger$ | 5.5 V | | | | | 1.65 | |
| I_{OZ} | A or B ports ‡ | $V_O = V_{CC}$ or GND | 5.5 V | | ± 0.5 | | ± 5 | μA |
| I_I | $\overline{\text{G}}\text{BA}$ or GAB | $V_I = V_{CC}$ or GND | 5.5 V | | ± 0.1 | | ± 1 | μA |
| I_{CC} | $V_I = V_{CC}$ or GND, $I_O = 0$ | 5.5 V | | | 4 | | 40 | μA |
| ΔI_{CC}^\S | One input at 3.4 V, Other inputs at GND or V_{CC} | 5.5 V | | | 0.9 | | 1 | mA |
| C_i | $\overline{\text{G}}\text{BA}$ or GAB | 5 V | | 4 | | | | pF |
| C_{io} | A or B ports | 5 V | | 20 | | | | pF |

† Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

‡ For I/O ports, the parameter I_{OZ} includes the input leakage.

§ This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V_{CC} .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2–3

8961723 0105078 999

74ACT11623 OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS

SCAS059A – D2957, JULY 1987 – REVISED APRIL 1993

[查询 74ACT11623DW 供应商](#)


switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM (INPUT) | TO (OUTPUT) | T _A = 25°C | | | MIN | MAX | UNIT |
|------------------|-------------------------|----------------|-----------------------|-----|------|-----|------|------|
| | | | MIN | TYP | MAX | | | |
| t _{PLH} | A or B | B or A | 1.5 | 6 | 7.5 | 1.5 | 8.5 | ns |
| t _{PHL} | | | 1.5 | 5.5 | 7.2 | 1.5 | 7.9 | |
| t _{PZH} | $\overline{\text{GBA}}$ | A | 1.5 | 6.9 | 8.6 | 1.5 | 9.7 | ns |
| t _{PZL} | | | 1.5 | 6.9 | 9 | 1.5 | 10 | |
| t _{PHZ} | $\overline{\text{GBA}}$ | A | 1.5 | 8.1 | 10 | 1.5 | 10.9 | ns |
| t _{PLZ} | | | 1.5 | 8.5 | 10.5 | 1.5 | 11.5 | |
| t _{PZH} | GAB | B | 1.5 | 7.7 | 9.3 | 1.5 | 10.7 | ns |
| t _{PZL} | | | 1.5 | 7.7 | 9.7 | 1.5 | 10.9 | |
| t _{PHZ} | GAB | B | 1.5 | 7.1 | 8.8 | 1.5 | 9.5 | ns |
| t _{PLZ} | | | 1.5 | 7.3 | 9.2 | 1.5 | 10 | |

operating characteristics, V_{CC} = 5 V, T_A = 25°C

| PARAMETER | | TEST CONDITIONS | TYP | UNIT |
|-----------------|---|------------------|-----|------|
| C _{pd} | Power dissipation capacitance per transceiver | Outputs enabled | 41 | pF |
| | | Outputs disabled | 8 | |

PARAMETER MEASUREMENT INFORMATION

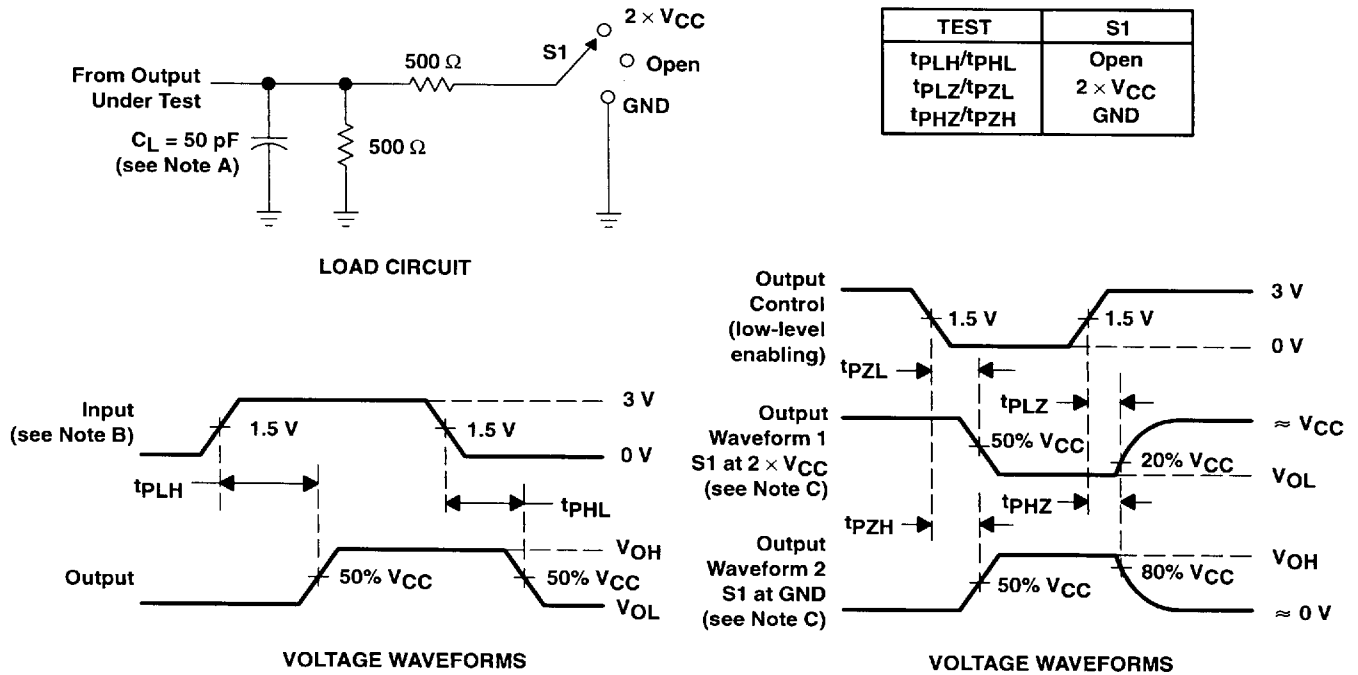

- NOTES: A. C_L includes probe and jig capacitance.
- B. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
- C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms