

SANTA ANA, CA

SCOTTSDALE, AZ

For more information call:  
(602) 941-6300

# 1N935, A & B thru 1N940, A & B

## FEATURES

- ZENER VOLTAGE 9.0V ± 5% (See Note 1)
- 1N935B, 937B, 938B, 939B, 940B HAVE JAN, JANTX, JANTXV, AND -1 QUALIFICATIONS TO MIL-S-19500/156
- S1N939A
- RADIATION HARDENED DEVICES AVAILABLE (SEE NOTE 5)
- JANS EQUIVALENT AVAILABLE VIA SCD

## MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C.

Storage Temperature: -65°C to +175°C

DC Power Dissipation: 500 mW @ 25°C.

Power Derating: 3.33 mW/°C above 25°C.

## \*ELECTRICAL CHARACTERISTICS

@ 25°C, unless otherwise specified

JEDEC TYPE NUMBERS	ZENER VOLTAGE $V_z$ @ $I_z$ (NOTE 1 & 4)	ZENER TEST CURRENT $I_z$	MAXIMUM ZENER IMPEDANCE (NOTE 2) $Z_{zt}$	VOLTAGE TEMPERATURE STABILITY (NOTE 3 & 4) $\Delta V_z$ MAXIMUM	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT $\alpha_{Vz}$
	VOLTS	mA	OHMS	mV	°C	%/°C
1N935	8.55-9.45	7.5	20	67	0 to +75	0.01
1N935A	8.55-9.45	7.5	20	139	-55 to +100	0.01
1N935B	8.55-9.45	7.5	20	184	-55 to +150	0.01
1N936	8.55-9.45	7.5	20	33	0 to +75	0.005
1N936A	8.55-9.45	7.5	20	69	-55 to +100	0.005
1N936B	8.55-9.45	7.5	20	92	-55 to +150	0.005
1N937	8.55-9.45	7.5	20	13	0 to +75	0.002
1N937A	8.55-9.45	7.5	20	27	-55 to +100	0.002
1N937B	8.55-9.45	7.5	20	37	-55 to +150	0.002
1N938	8.55-9.45	7.5	20	6	0 to +75	0.001
1N938A	8.55-9.45	7.5	20	13	-55 to +100	0.001
1N938B	8.55-9.45	7.5	20	18	-55 to +150	0.001
1N939	8.55-9.45	7.5	20	3	0 to +75	0.0005
1N939A	8.55-9.45	7.5	20	7	-55 to +100	0.0005
1N939B	8.55-9.45	7.5	20	9	-55 to +150	0.0005
1N940	8.55-9.45	7.5	20	1.3	0 to +75	0.0002
1N940A	8.55-9.45	7.5	20	2.7	-55 to +100	0.0002
1N940B	8.55-9.45	7.5	20	3.7	-55 to +150	0.0002

\*JEDEC Registered Data

**NOTE 1** When ordering devices with tighter tolerances than specified, use a nominal center voltage of 9.2V.

**NOTE 2** Measured by superimposing 0.75 mA ac rms on 7.5 mA DC @ 25°C.

**NOTE 3** The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV change at any discrete temperature between the established limits.

**NOTE 4** Voltage measurements to be performed 15 seconds after application of DC current.

**NOTE 5** Designate Radiation Hardened devices with "RH" prefix instead of "1N", i.e. RH938A instead of 1N938A.

## 9.0 VOLT TEMPERATURE COMPENSATED ZENER REFERENCE DIODES

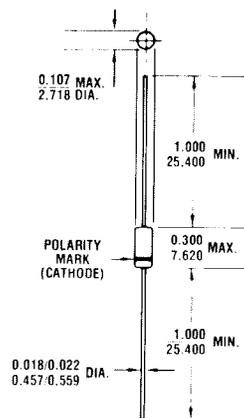


FIGURE 1

All dimensions in INCH  
m.m.

## MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case. DO-7.

FINISH: All external surfaces are corrosion resistant and leads solderable.

THERMAL RESISTANCE: 300°C/W (Typical) junction to lead at 0.375-inches from body.

POLARITY: Diode to be operated with the banded end positive with respect to the opposite end.

WEIGHT: 0.2 grams.

MOUNTING POSITION: Any.

# 1N935 thru 1N940B

## 查询"1N935B-1"供应商

### NOTE 5

The curve shown in Fig. 3 is typical of the diode series and greatly simplifies the estimation of the Temperature Coefficient (TC) when the diode is operated at currents other than 7.5 mA.

EXAMPLE: A diode in this series is operated at a current of 7.5 mA and has specified Temperature Coefficient (TC) limits of  $\pm 0.005\%/^{\circ}\text{C}$ . To obtain the typical Temperature Coefficient limits for this same diode operated at a current of 6.0 mA, the new TC limits ( $\%/^{\circ}\text{C}$ ) can be estimated using the graph in FIGURE 3.

At a test current of 6.0 mA the change in Temperature Coefficient (TC) is approximately  $-0.0009\%/^{\circ}\text{C}$ . The algebraic sum of  $\pm 0.005\%/^{\circ}\text{C}$  and  $-0.0009\%/^{\circ}\text{C}$  gives the new limits of  $+0.0041\%/^{\circ}\text{C}$  and  $-0.0059\%/^{\circ}\text{C}$ .

### NOTE 6

The curve in Figure 4 illustrates the change of diode voltage arising from the effect of impedance. It is, in effect, an exploded view of the zener operating region of the I-V characteristic.

In conjunction with Fig. 3 this curve can be used to estimate total voltage regulation under conditions of both varying temperature and current.

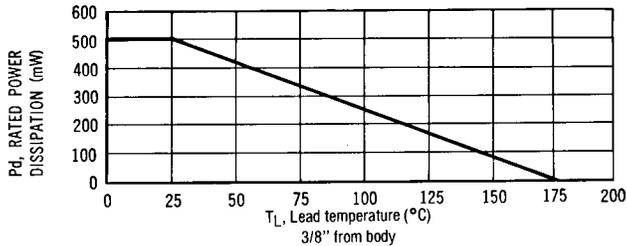


FIGURE 2 Power Derating Curve

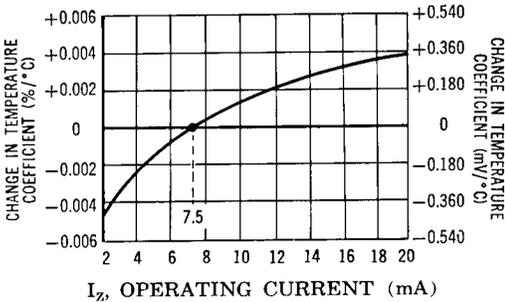


FIGURE 3 Typical change of Temperature Coefficient with Change in Operating Current.

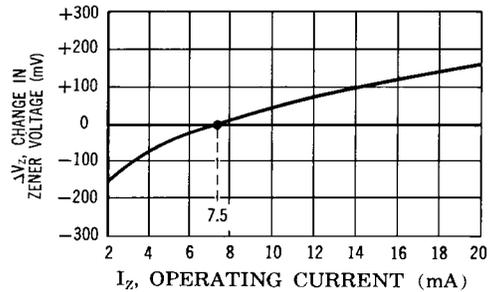


FIGURE 4 Typical change of Zener Voltage with Change in Operating Current.