


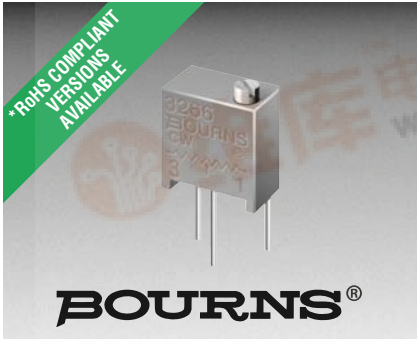

Features

- Multiturn / Cermet / Industrial / Sealed
- Standoffs allow thorough PC board washing
- Tape and reel packaging available
- Patent #4427966 drive mechanism
- RoHS compliant* version available

3266 - 1/4 " Square Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range10 to 1 megohm
(see standard resistance table)
Resistance Tolerance±10 % std.
Absolute Minimum Resistance1 % or 2 ohms max.
(whichever is greater)
Contact Resistance Variation3.0 % or 3 ohms max.
(whichever is greater)
Adjustability
Voltage.....±0.02 %
Resistance.....±0.05 %
Resolution.....Infinite
Insulation Resistance500 vdc.
1,000 megohms min.
Dielectric Strength
Sea Level600 vac
80,000 Feet.....250 vac
Effective Travel.....12 turns nom.

Environmental Characteristics


Power Rating (300 volts max.)
70 °C0.25 watt
150 °C0 watt
Temperature Range.....-55 °C to +150 °C
Temperature Coefficient.....±100 ppm/°C
Seal Test.....85 °C Fluorinert[†]
Humidity.....MIL-STD-202 Method 103
96 hours (2 % ΔTR, 10 Megohms IR)
Vibration.....30 G (1 % ΔTR; 1 % ΔVR)
Shock.....100 G (1 % ΔTR; 1 % ΔVR)
Load Life...1,000 hours 0.25 watt 70 °C
(3 % ΔTR; 3 % CRV)
Rotational Life200 cycles
(4 % ΔTR; 3 % or 3 ohms,
whichever is greater, CRV)

Physical Characteristics


Torque3.0 oz-in. max.
Mechanical Stops.....Wiper idles
TerminalsSolderable pins
Weight0.015 oz.
MarkingManufacturer's
trademark, resistance code,
wiring diagram, date code,
manufacturer's model
number and style
Wiper.....50 % (Actual TR) ±10 %
FlammabilityU.L. 94V-0
Standard Packaging50 pcs. per tube
Adjustment ToolH-90

3266W


Common Dimensions

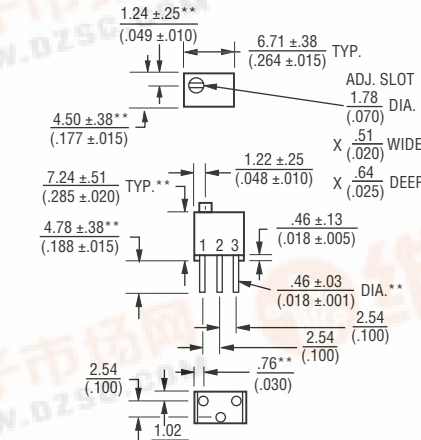

3266P

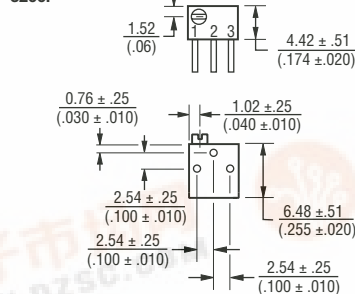


3266X

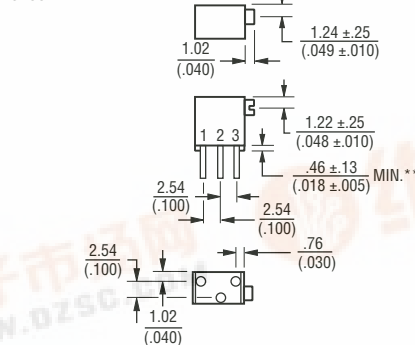


**COMMON DIMENSIONS

3266Y

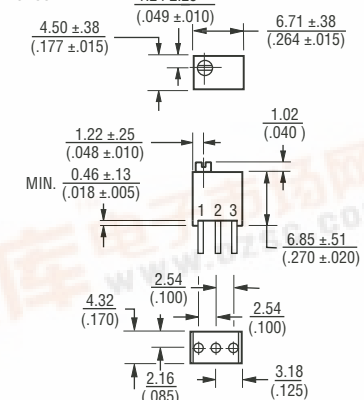

3266Z

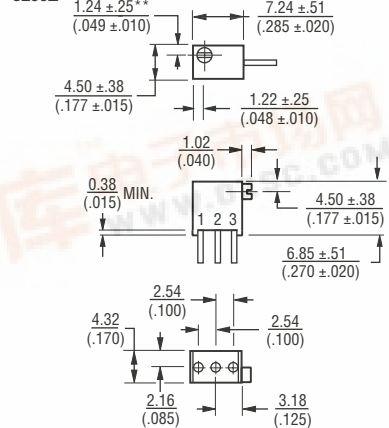

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: $\frac{\text{MM}}{\text{(INCHES)}}$


How to Order

3266 W - 1 - 103 LF

Model _____
Style _____
Standard or Modified
Product Indicator _____
-1 = Standard Product
Resistance Code _____
Packaging Designator _____
Blank = Tube (Standard)
R = Tape and Reel (Z and Y Pin Styles
Only)
A = Ammo Pack (Z and Y Pin Styles Only)
Terminations _____
LF = 100 % Tin-plated (RoHS compliant)
Blank = 90 % Tin / 10 % Lead-plated
(Standard)

Consult factory for other available options.

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

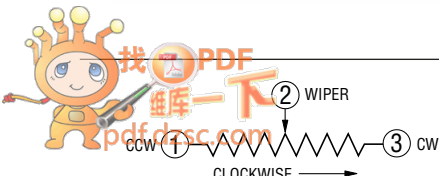

3266 - 1/4 " Square Trimming Potentiometer

BOURNS®


Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105




Popular distribution resistance values listed in boldface. Special resistances available.

Packaging Specifications

**SIDE ADJUST
3266Z-1**

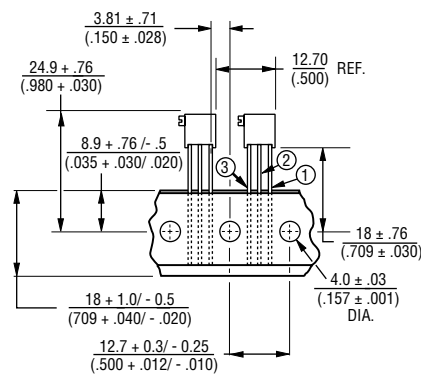

**TOP ADJUST
3266Y-1**

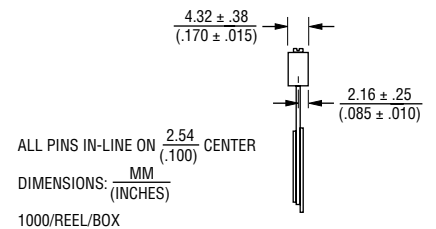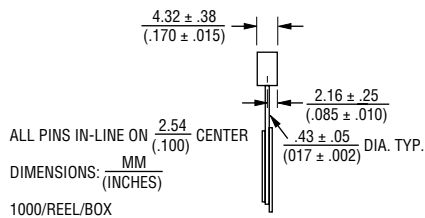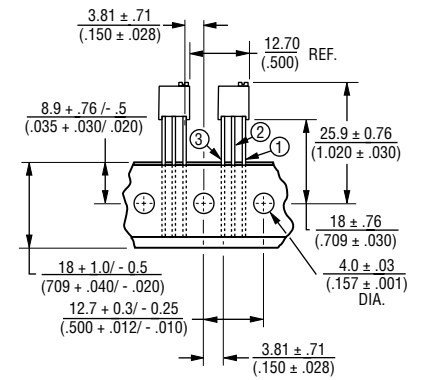

Meets EIA Specification 468.