


ADSL FREQUENCY FILTER INDUCTORS



- Excellent THD performance in a small footprint
- Used exclusively for frequency filtering
- SMT compact footprint
- Matched to various manufacturers' ADSL chipsets



Electrical Specifications @ 25°C — Operating Temperature -40°C to 85°C

Part Number	Application	Turns Ratio (±2%)	Inductance (μH MAX ±7%)	DC Resistance (Ω MAX)	Isolation Voltage (Vrms)	Schematic
BX8153	CPE	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 5.0	(1-3) = (4-6) = 0.7	500	1
B2125A	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 50	(1-6) = (2-5) = 2.0	500	2
B2198	CPE	(2-3)/(4-5) 1:1	(2-3) = (4-5) = 74	(2-3) = (4-5) = 5.0	500	3
B2184	CPE	(1-5)/(2-4) 1:1	(1-5) = (2-4) = 91	(1-5) = (2-4) = 3.5	500	4
BX8195	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 102.5	(1-6) = (2-5) = 6.0	500	2
BX8254W	CPE	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 110	(1-3) = (4-6) = 2.5	500	1
BX8082	CPE	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 140	(1-6) = (2-5) = 6.0	500	2
B2126A	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 170	(1-6) = (2-5) = 6.5	500	2
B2208	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 170	(1-6) = (2-5) = 4.0	500	2
BX8253W	CPE	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 185	(1-3) = (4-6) = 4.8	500	1
B2155	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 205	(1-6) = (2-5) = 6.0	500	2
BX8118	CO	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 282	(1-3) = (4-6) = 9.0	500	1
B2209	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 300	(1-6) = (2-5) = 7.0	500	2
B2127A	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 340	(1-6) = (2-5) = 7.5	500	2
B2210	CO	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 455	(1-6) = (2-5) = 9.0	500	2
BX2128	CPE	(1-6)/(2-5) 1:1	(1-6) = (2-5) = 500	(1-6) = (2-5) = 12.0	500	2
BX8115	CO	(1-3)/(4-6) 1:1	(1-3) = (4-6) = 500	(1-3) = (4-6) = 9.0	500	1

NOTE: Transformers are shipped in trays, unless Tape & Reel packaging is specified by adding the suffix "T" to this part number (i.e. BX8153T).

Mechanical

Schematic

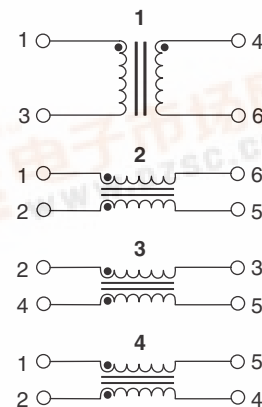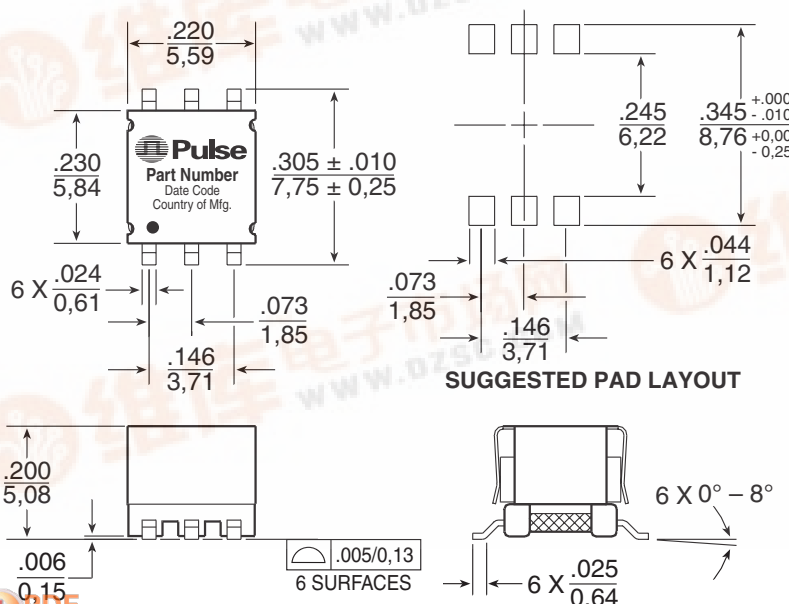

Weight0.38 grams
Tape & Reel1000/reel
Tray80/tray
Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

(See page two for ADSL Frequency Inductor Selection Guide)

ADSL FREQUENCY FILTER INDUCTORS



ADSL Frequency Inductor Selection Guide

IC Manufacturer & Part Number	Part Number	Inductance	Application
For General use			
	B2184	91.0 μ H	CPE
	B2198	74.0 μ H	CPE
	BX2128	500.0 μ H	CPE
	BX8082	140.0 μ H	CPE
STMicroelectronics (Alcatel)			
MTB-20850/MTB-21250	BX8115	500.0 μ H	CO
	BX8118	282.0 μ H	CO
	BX8253W	185.0 μ H	CPE
	BX8254W	110.0 μ H	CPE
MTB-20150/MTB-20170	BX8153	5.0 μ H	CPE
Centillium			
CT-L50SC04	B2208	170.0 μ H	CO
	B2209	300.0 μ H	CO
	B2210	455.0 μ H	CO
GlobespanVirata			
G7000 (DMT/CAP)	B2125A	50.0 μ H	CO
	B2126A	170.0 μ H	CO
	B2127A	340.0 μ H	CO
	B2155	205.0 μ H	CO
Titanium Express	BX8195	102.5 μ H	CO

NOTE: For other DynaMiTe Chipsets, see Datasheet **B963** for alternative Inductor shapes and values.

Legerity

NOTE: For Coupled inductors matched to Legerity CO Line Drivers & Chipsets, See Datasheet **B804**

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	9/F, Phase 2, Tai Sang Shatin Warehouse Centre 6 Wong Chuk Yeung Street Fotan, Shatin, Hong Kong TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product