

SANYO	No.2792A	DLM10
		Silicon Diffused Junction Type
1.0A Ultrahigh-Speed Rectifier		

Applications

- Switching regulator, high-frequency rectificatin.

Features

- Fast reverse recovery time and small switching loss.
- Reverse voltage $V_{RM}=100$ to $400V$.
- Average rectified current : $I_O=1.0A$.

Absolute Maximum Ratings at $T_a=25^{\circ}C$

			DLM10B	DLM10C	DLM10E	unit
Peak Reverse Voltage	V_{RM}		100	200	400	V
Average Rectified Current	I_O	50Hz sine wave, $T_a=57^{\circ}C$, resistive load ($L=8mm$, print land $10 \times 10mm$)	→	→	1.0	A
Surge Forward Current	I_{FSM}	50Hz sine wave, 1 cycle	→	→	30	A
Junction Temperature	T_j		→	→	150	$^{\circ}C$
Storage Temperature	T_{stg}		→	→	-40 to +150	$^{\circ}C$


Electrical Characteristics [DLM10B,C] at $T_a=25^{\circ}C$

			min	typ	max	unit
Forward Voltage	V_F	$I_F=1.0A$			0.98	V
Reverse Current	I_R	V_R : Each V_{RM}			10	μA
Reverse Recovery Time	t_{rr}	$I_{FM}=1A$, $-di/dt=50A/\mu s$			35	ns
Thermal Resistance (Junction-Ambient)	$R_{th(j-a)}$	No heat sink, DLM10 only			115	$^{\circ}C/W$







Electrical Characteristics [DLM10E] at $T_a=25^{\circ}C$

			min	typ	max	unit
Forward Voltage	V_F	$I_F=1.0A$			1.25	V
Reverse Current	I_R	$V_{RM}=400V$			20	μA
Reverse Recovery Time	t_{rr}	$I_{FM}=1A$, $-di/dt=50A/\mu s$			30	ns
Thermal Resistance (Junction-Ambient)	$R_{th(j-a)}$	No heat sink, DLM10 only			115	$^{\circ}C/W$

Package Dimensions 1190 (unit: mm)

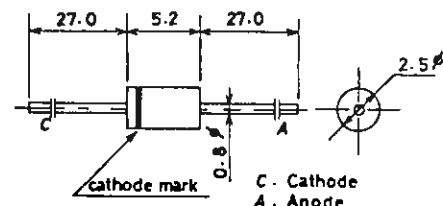

DLM10

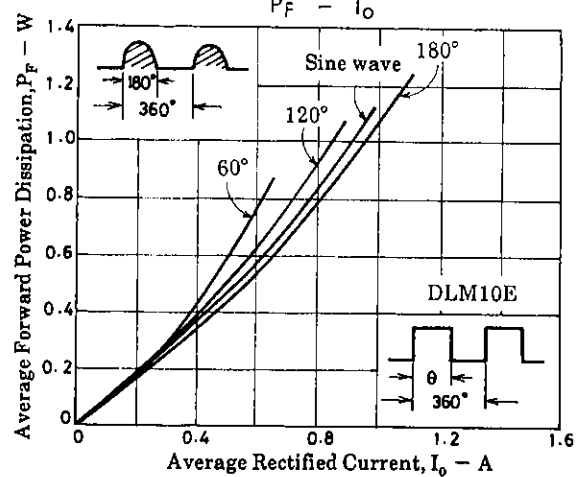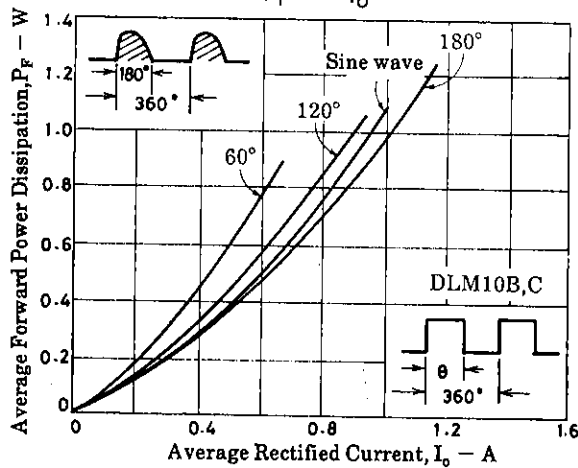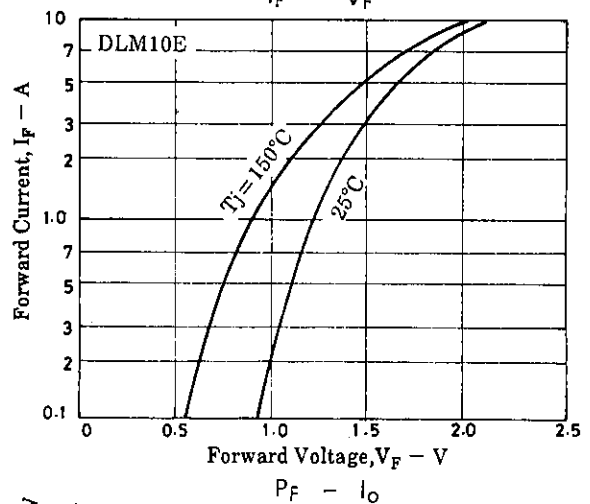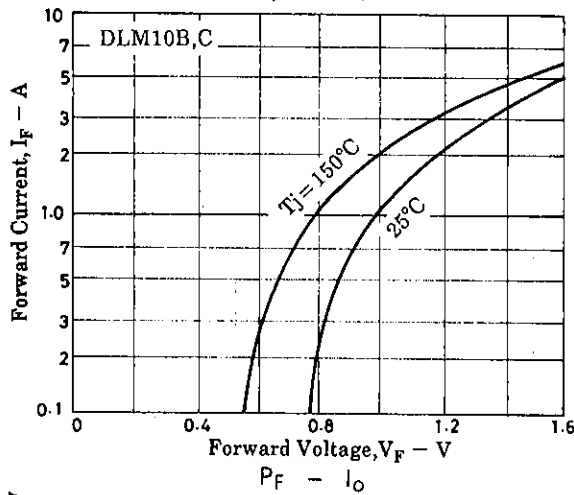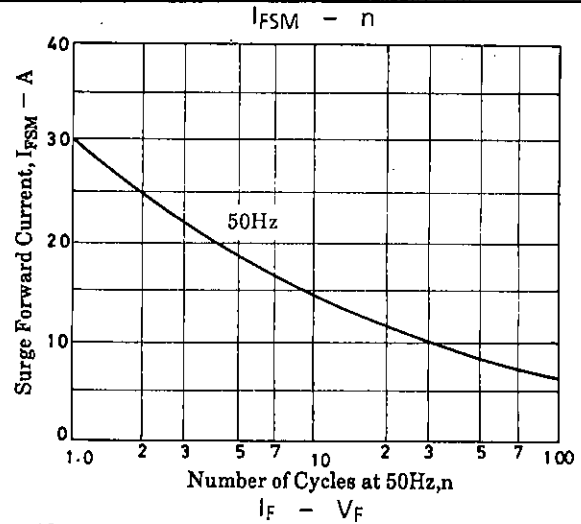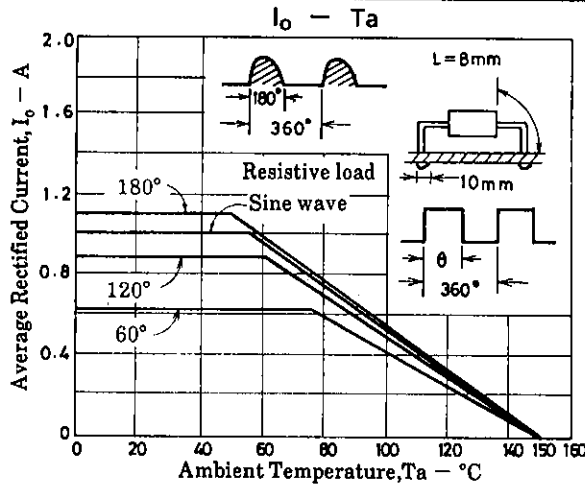

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.