

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon


MW 5mmL, For General Audio Equipment
series



For Audio Use

Anti-Solvent Feature


- Acoustic series, with 5mm height.
- Adapted to the RoHS directive (2002/95/EC).




■ Specifications

[illegible]

■ Radial Lead Type

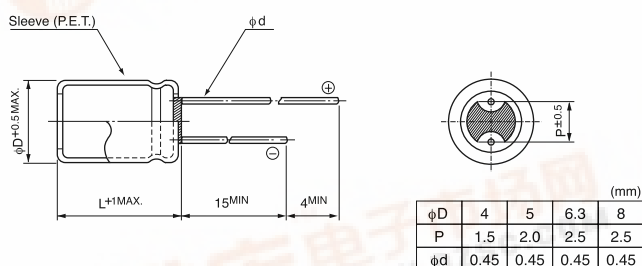

Type numbering system (Example : 25V 10 μ F)

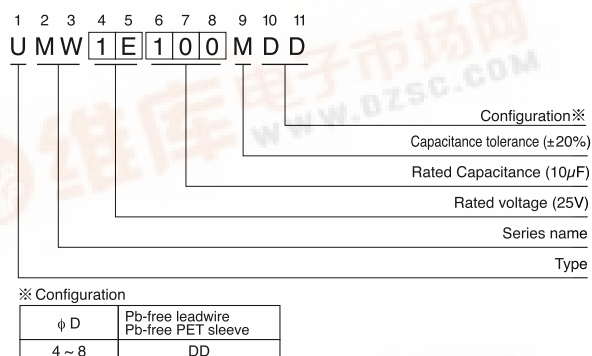

■ Dimensions

Cap.(μF)code		4		6.3		10		16		25		35		50	
		0G		0J		1A		1C		1E		1V		1H	
0.1	0R1													4×5	1.0
0.22	R22													4×5	2.0
0.33	R33													4×5	2.8
0.47	R47													4×5	4.0
1	010													4×5	8.4
2.2	2R2													4×5	13
3.3	3R3											4×5	15	4×5	17
4.7	4R7									4×5	16	4×5	18	5×5	20
10	100							4×5	23	5×5	27	5×5	29	6.3×5	33
22	220			4×5	28	5×5	33	5×5	37	6.3×5	42	6.3×5	46	8×5	52
33	330	4×5	28	5×5	37	5×5	41	6.3×5	49	6.3×5	52	8×5	62	8×5	71
47	470	4×5	33	5×5	45	6.3×5	52	6.3×5	58	8×5	70	8×5	80		
100	101	5×5	56	6.3×5	70	8×5	80	8×5	92	8×5	110				
220	221	6.3×5	96	8×5	110	8×5	135								
330	331	8×5	145	8×5	170										
470	471	8×5	185											Case size φ D×L (mm)	Rated ripple

Rated Ripple (mArms) at 85°C 120Hz

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz ~
Coefficient	0.70	1.00	1.17	1.36	1.50

Please refer to page 21, 22, 23 about the formed or taped product spec.

Please refer to page 3 for the minimum order quantity.