



CMOS HEX INVERTER

FEATURES


- ◆ Fully "B"-Series Compatible
- ◆ Diode Protection on all Inputs
- ◆ Pin Compatible with 74C04

DESCRIPTION

The 4069UB consists of six CMOS inverter circuits. The device is intended for general-purpose inverter applications where the higher output drive and level-shifting feature of the 4009UB and 4049UB are not required.* The 4069UB is particularly useful for quasi-linear circuits such as oscillators (See Applications Information).

*For pin-to-pin compatibility with the 4009UB and 4049UB, the 4449UB is available.

SCHEMATIC DIAGRAM (one of six inverters)


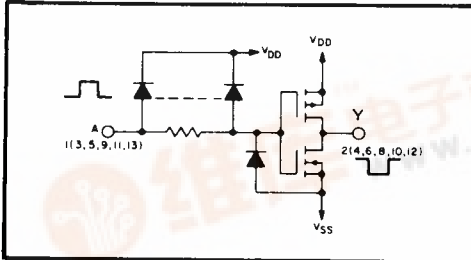


RECOMMENDED OPERATING CONDITIONS

For maximum reliability:

DC Supply Voltage	$V_{DD} - V_{SS}$	3 to 15	Vdc
Operating Temperature	T_A	-55 to +125	°C
C, D, F, H Device		-40 to +85	°C
E Device			

LOGIC DIAGRAM

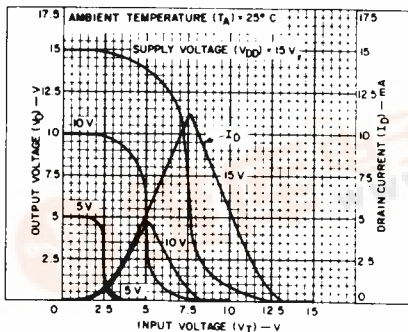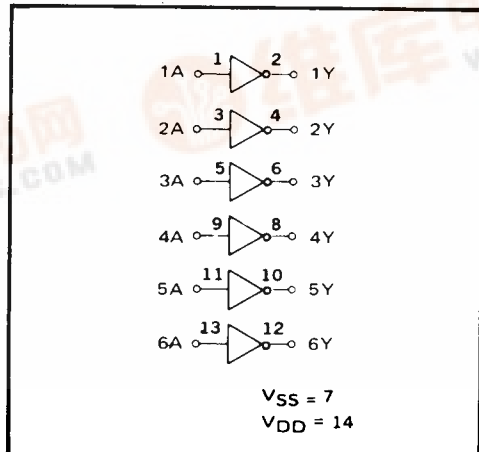

Typical current and voltage transfer characteristics



ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS¹

PARAMETER	V _{DD} (Vdc)	CONDITIONS	T _{LOW} ²		+25°C			T _{HIGH} ²		Units
			Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
QUIESCENT DEVICE CURRENT	I _{DD}	V _{IN} =V _{SS} or V _{DD} All valid input combinations	—	0.05	—	0.0005	0.05	—	1.5	μA _{dc}
			—	0.10	—	0.001	0.10	—	3.0	
			—	0.20	—	0.002	0.20	—	6.0	
			—	—	—	—	—	—	—	

NOTES: ¹ Remaining Static Characteristics are listed under "4000B Series Family Specifications".

² T_{LOW} = -55°C for C, D, F, H device.


= -40°C for E device.

T_{HIGH} = +125°C for C, D, F, H device.


= + 85°C for E device.

DYNAMIC CHARACTERISTICS (C_L = 50pF, T_A = 25°C)

PARAMETER		V _{DD} (Vdc)	Min.	Typ.	Max.	Units
PROPAGATION DELAY TIME	t _{PLH} , t _{PHL}	5	—	50	100	ns
		10	—	25	50	
		15	—	20	40	
OUTPUT TRANSITION TIME	t _{TLH} , t _{THL}	5	—	75	150	ns
		10	—	35	70	
		15	—	30	60	

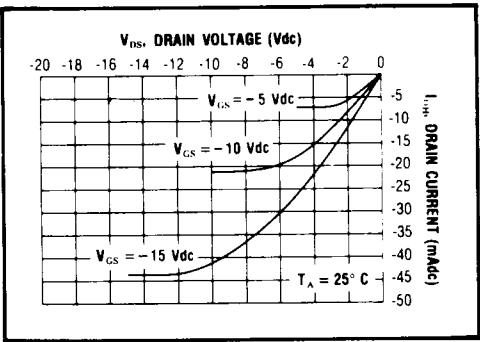


Typical P-Channel
Source Current Characteristics

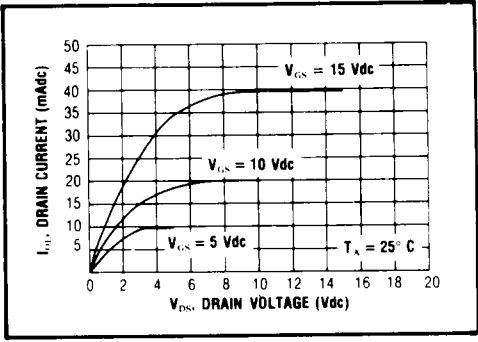


Typical N-Channel
Sink Current Characteristics


APPLICATIONS INFORMATION

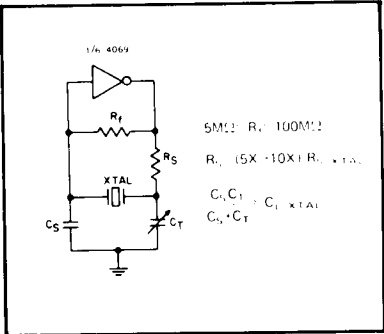

Typical crystal oscillator circuit



Typical RC oscillator circuit



Input pulse shaping circuit (Schmitt
Trigger)