

IXYS

VUM 33-05

Power MOSFET Stage for Boost Converters



Module for Power Factor Correction

$$I_{D25} = 47 \text{ A}$$

$$V_{DSS} = 500 \text{ V}$$

$$R_{DS(on)} = 0.12 \Omega$$

V_{RRM} (Diode) V	V_{DSS} V	Type
600	500	VUM 33-05N



Symbol	Test Conditions	Maximum Ratings
V_{DSS}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C	500 V
V_{DGR}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C ; $R_{GS} = 10 \text{ k}\Omega$	500 V
V_{GS}	Continuous	± 20 V
I_D	$T_S = 85^{\circ}\text{C}$	33 A
I_D	$T_S = 25^{\circ}\text{C}$	47 A
I_{DM}	$T_S = 25^{\circ}\text{C}$, $t_p = ①$	130 A
P_D	$T_S = 85^{\circ}\text{C}$	310 W
I_S	$V_{GS} = 0 \text{ V}$, $T_S = 25^{\circ}\text{C}$	33 A
I_{SM}	$V_{GS} = 0 \text{ V}$, $T_S = 25^{\circ}\text{C}$, $t_p = ①$	130 A
V_{RRM}	$T_S = 85^{\circ}\text{C}$, rectangular $\delta = 0.5$	600 V
I_{FAV}	$T_S = 85^{\circ}\text{C}$, rectangular $\delta = 0.5$	33 A
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz) $t = 8.3 \text{ ms}$ (60 Hz)	300 A 320 A
	$T_{VJ} = 150^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz) $t = 8.3 \text{ ms}$ (60 Hz)	260 A 280 A
P	$T_S = 85^{\circ}\text{C}$	59 W
V_{RRM}	$T_S = 85^{\circ}\text{C}$, sinus 180°	800 V
I_{dAV}	$T_S = 85^{\circ}\text{C}$, sinus 180°	54 A
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz) $t = 8.3 \text{ ms}$ (60 Hz)	300 A 320 A
	$T_{VJ} = 150^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz) $t = 8.3 \text{ ms}$ (60 Hz)	260 A 280 A
P	$T_S = 85^{\circ}\text{C}$	50 W
T_{VJ}		$-40 \dots +150^{\circ}\text{C}$
T_{JM}		150°C
T_{stg}		$-40 \dots +150^{\circ}\text{C}$
V_{ISOL}	50/60 Hz $t = 1 \text{ min}$ $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3000 V~ 3600 V~
M_d Weight	Mounting torque (M5)	2-2.5/18-22 Nm/lb.in. 28 g

Features

- Package with DCB ceramic base plate
- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Low $R_{DS(on)}$ HDMOS™ process
- Low package inductance for high speed switching
- Ultrafast boost diode
- Kelvin source for easy drive

Applications

- Power factor pre-conditioner for SMPS, UPS, battery chargers and inverters
- Boost topology for SMPS including 1~ rectifier bridge
- Power supply for welding equipment

Advantages

- 3 functions in one package
- Output power up to 8 kW
- No external isolation
- Easy to mount with two screws
- Suitable for wave soldering
- High temperature and power cycling capability
- Fits easily to all available PFC controller ICs

① Pulse width limited by T_{VJ}
IXYS reserves the right to change limits, test conditions and dimensions.

Symbol	Test Conditions	Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_{DSS} $V_{GS(th)}$	$V_{GS} = 0\text{ V}, I_D = 2\text{ mA}$ $V_{DS} = 20\text{ V}, I_D = 20\text{ mA}$	500 2		V 5 V
I_{GSS}	$V_{GS} = \pm 20\text{ V}, V_{DS} = 0\text{ V}$			$\pm 500\text{ nA}$
I_{DSS}	$V_{DS} = 500\text{ V}, V_{GS} = 0\text{ V}$			2 mA
$R_{DS(on)}$ R_{Gint}	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 25^{\circ}\text{C}$			0.12 Ω 1.5 Ω
g_{fs} V_{DS}	$V_{DS} = 15\text{ V}, I_{DS} = 12\text{ A}$ $I_{DS} = 24\text{ A}, V_{GS} = 0\text{ V}$	30		S 1.5 V
$t_{d(on)}$ $t_{d(off)}$	$V_{DS} = 250\text{ V}, I_{DS} = 12\text{ A}, V_{GS} = 10\text{ V}$ Zgen. = 1 Ω , L-load			100 ns 220 ns
C_{iss} C_{oss} C_{rss}	$V_{DS} = 25\text{ V}, f = 1\text{ MHz}, V_{GS} = 0\text{ V}$	8.5 0.9 0.3		nF nF nF
Q_g R_{thJS}	$V_{DS} = 250\text{ V}, I_D = 12\text{ A}, V_{GS} = 10\text{ V}$	350		nC 0.21 K/W
V_F	$I_F = 33\text{ A}; T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 150^{\circ}\text{C}$			1.75 V 1.5 V
I_R	$V_R = 600\text{ V}, T_{VJ} = 25^{\circ}\text{C}$ $V_R = 480\text{ V}, T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$			1.5 mA 0.25 mA 7 mA
V_{T0} r_T	For power-loss calculations only $T_{VJ} = 125^{\circ}\text{C}$			1.21 V 9 m Ω
I_{RM}	$I_F = 30\text{ A}; -di_F/dt = 240\text{ A}/\mu\text{s}$ $V_R = 350\text{ V}, T_{VJ} = 100^{\circ}\text{C}$	10		11 A
R_{thJS}				1.1 K/W
V_F	$I_F = 20\text{ A}, T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$			1.5 V 1.5 V
I_R	$V_R = 800\text{ V}, T_{VJ} = 25^{\circ}\text{C}$ $V_R = 640\text{ V}, T_{VJ} = 125^{\circ}\text{C}$			0.25 mA 2 mA
V_{T0} r_T	For power-loss calculations only $T_{VJ} = 125^{\circ}\text{C}$			1.18 V 12 m Ω
R_{thJS}				1.3 K/W

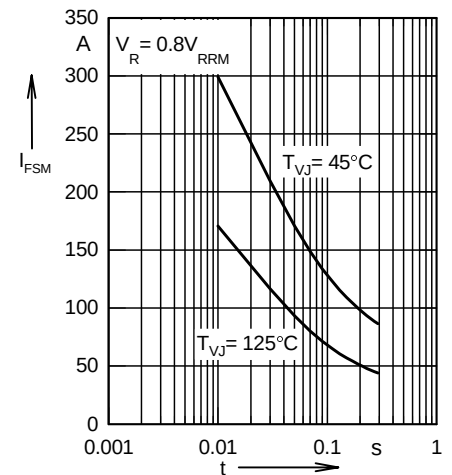


Fig. 1 Non-repetitive peak surge current (Rectifier Diodes)

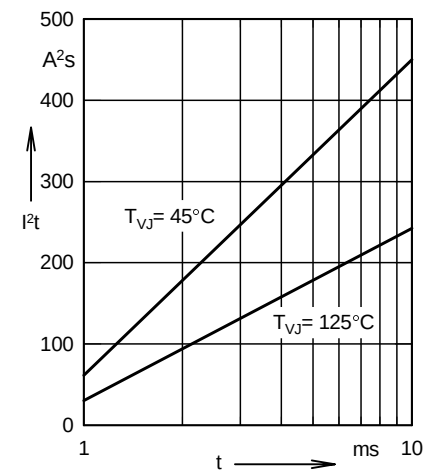
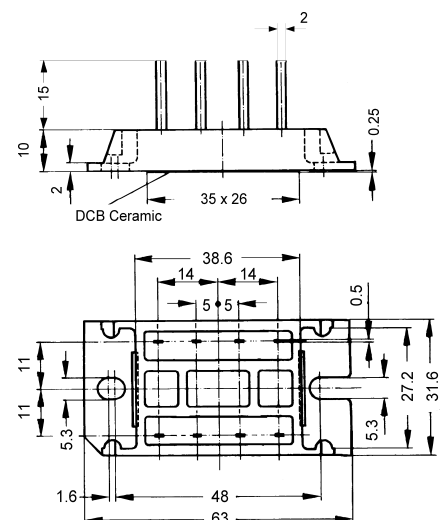


Fig. 2 I^2t for fusing (Rectifier Diodes)

Dimensions in mm (1 mm = 0.0394")



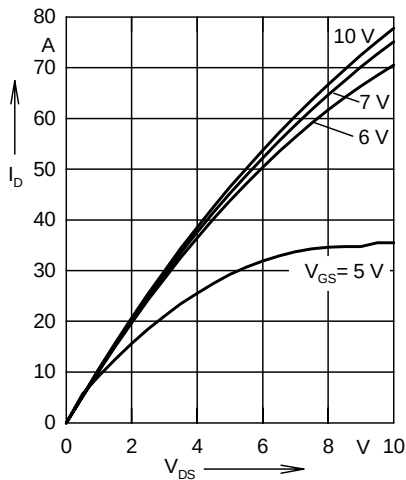


Fig. 3 Typ. output characteristic
 $I_D = f(V_{DS})$ (MOSFET)

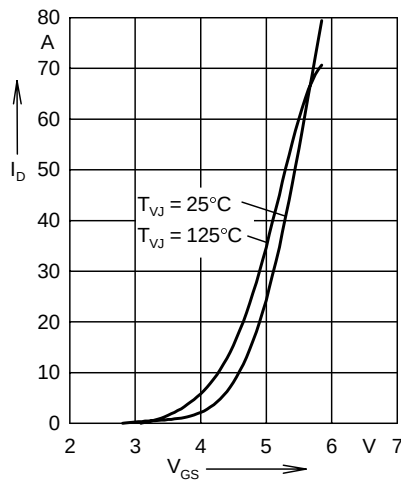


Fig. 4 Typ. transfer characteristics
 $I_D = f(V_{GS})$ (MOSFET)

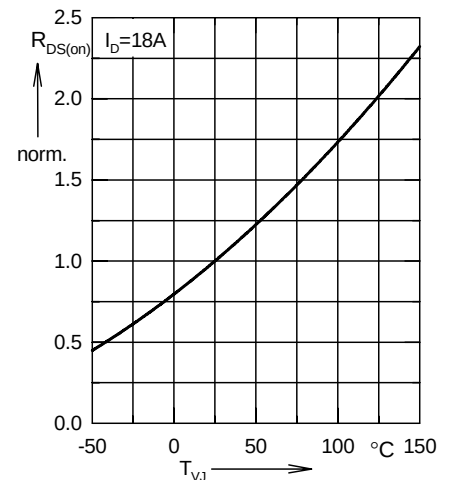


Fig. 5 Typ. normalized
 $R_{DS(on)} = f(T_{VJ})$ (MOSFET)

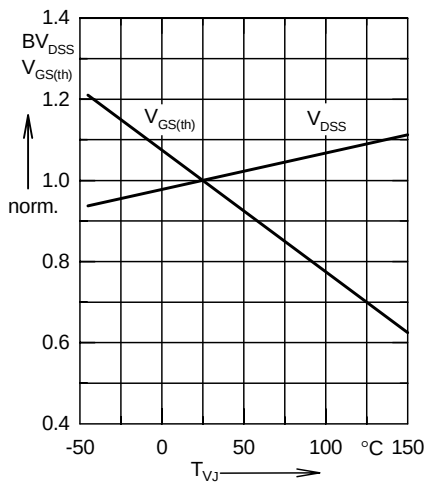


Fig. 6 Typ. normalized $BV_{DSS} = f(T_{VJ})$
 $V_{GS(th)} = f(T_{VJ})$ (MOSFET)

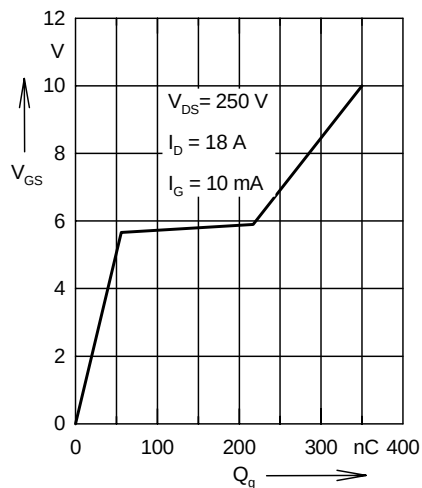


Fig. 7 Typ. turn-on gate charge
characteristics, $V_{GS} = f(Q_g)$ (MOSFET)

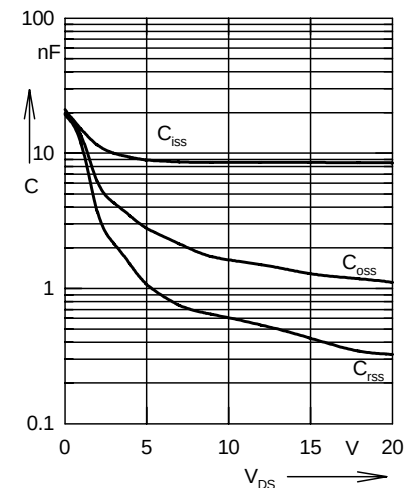


Fig. 8 Typ. capacitances $C = f(V_{DS})$,
 $f = 1\text{ MHz}$ (MOSFET)

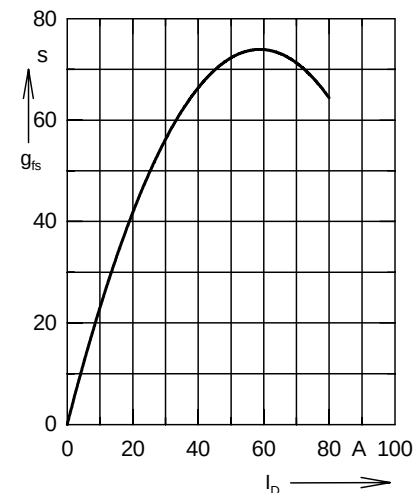


Fig. 9 Typ. transconductance,
 $g_{fs} = f(I_D)$ (MOSFET)

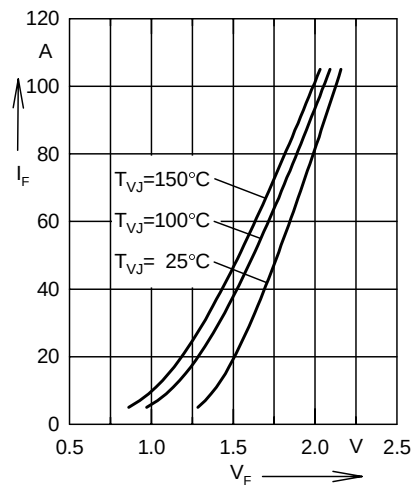


Fig. 10 Forward current versus
voltage drop (Boost Diode)

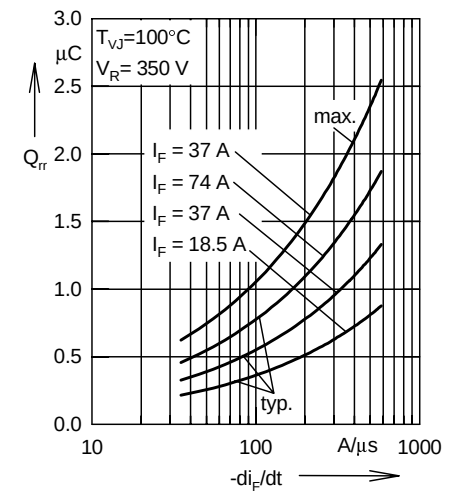


Fig. 11 Recovery charge versus $-di_F/dt$
(Boost Diode)

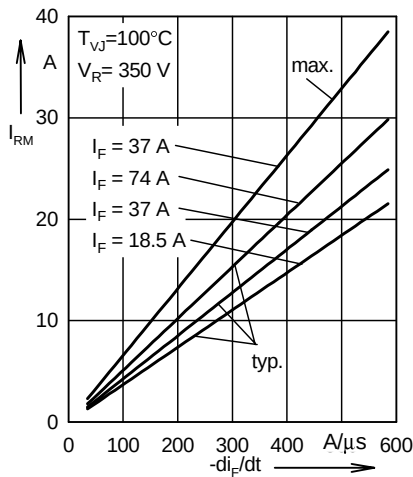


Fig. 12 Peak reverse current versus $-di_F/dt$ (Boost Diode)

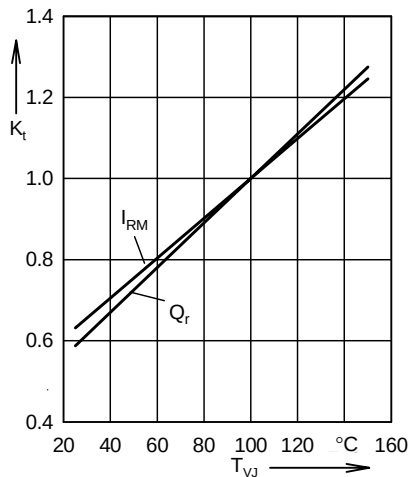


Fig. 13 Dynamic parameters versus junction temperature (Boost Diode)

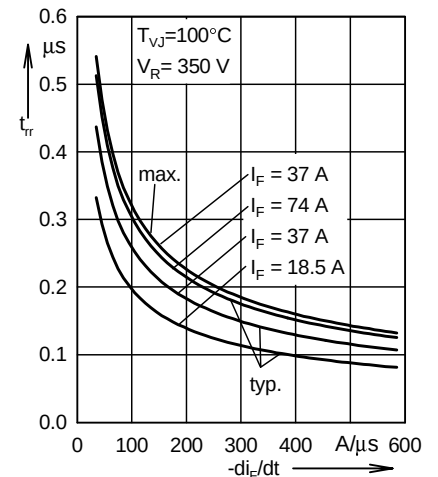


Fig. 14 Recovery time versus $-di_F/dt$ (Boost Diode)

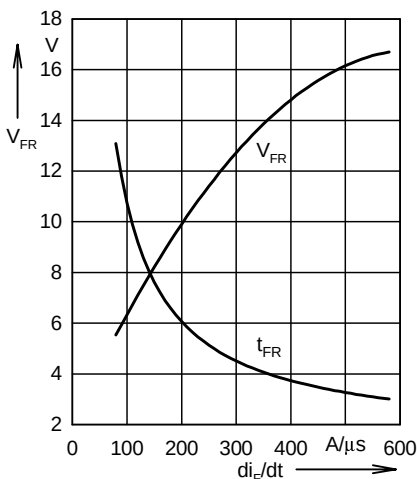


Fig. 15 Peak forward voltage versus $-di_F/dt$ (Boost Diode)

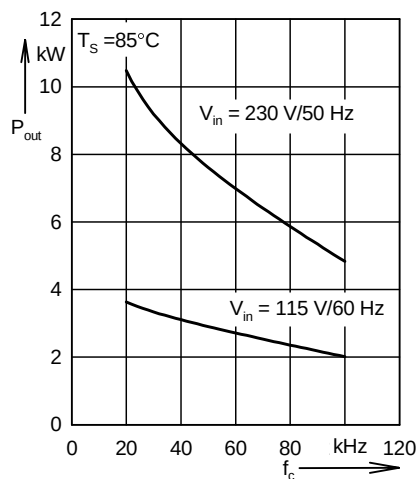


Fig. 16 Output power versus carrier frequency (Module)

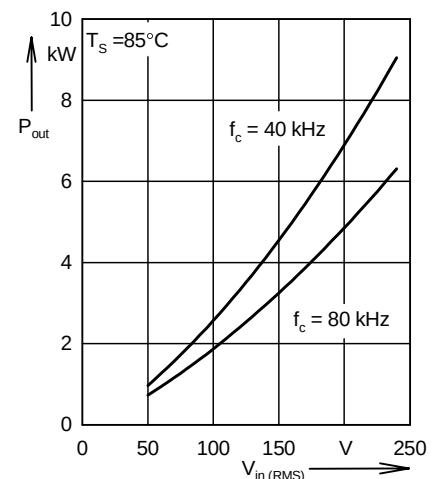


Fig. 17 Output power versus mains voltage

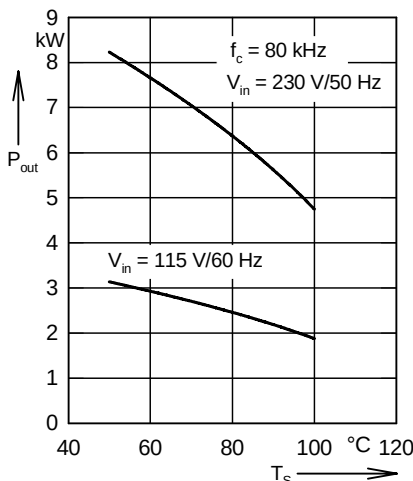


Fig. 18 Output power versus heatsink temperature (Module)

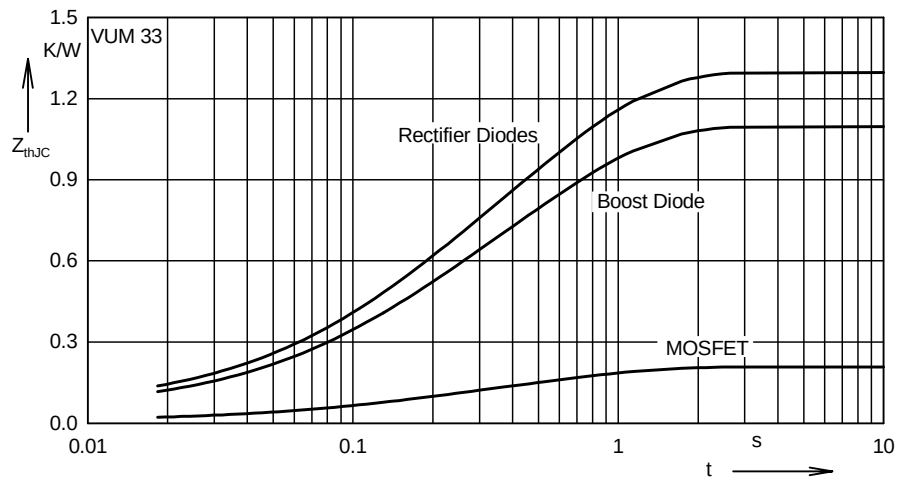


Fig. 19 Transient thermal impedance junction to case for all devices