


SRL LOCK SWITCH


LORLIN

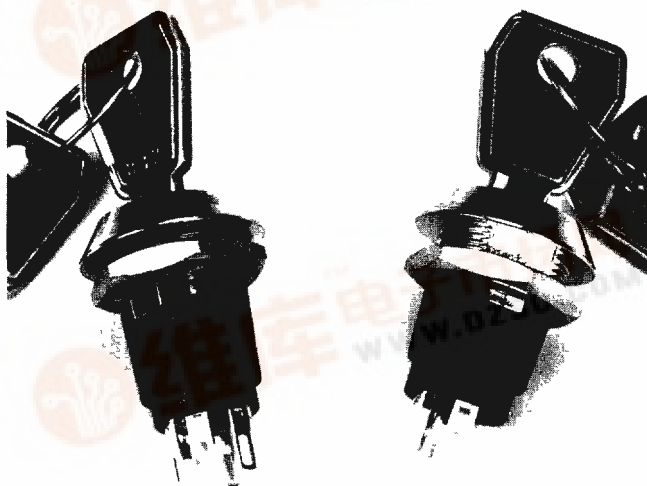

- Made in UK
- Miniature key-operated lockswitch.
- Single or double pole.
- Up to 200 key combinations - keys to differ
- Common keys available - keys to pass.
- Keys are double entry - they can be inserted into the lock either way up.
- Occupies a small panel area.
- Easily assembled through front of equipment panel.
- Rear projection less than 30mm from panel.

ELECTRICAL AND MECHANICAL SPECIFICATION

Proof Voltage	750 V dc minimum
Current Carrying Capacity (Non-Switching)	5A
Contact Rating (Switching Resistive Load)	5A 115Vac 3A 50V dc
Insulation Resistance	100 Megohm minimum
Initial Contact Resistance	20 Milliohm maximum
Minimum Operating Life	10000 Cycles
Contact Material	Silver Plated Brass
Body Material	Glass Filled Polyester
Operating Temperature	-20°C to 65°C
Standard number of keys per lock	2



ORDERING CODES

SRL - 5

Style (A to M)

See rear of data sheet.

Keys



S = common to all locks D = keys to differ between locks

Number of keys per lock

Single Pole Lockswitch

Parallel Lock Head

90° Indexing





BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-A	90°	90°	1,4	
SRL-5-B	90°	90°	1 Only	
SRL-5-C	180°	90°	1,4,7	

Single Pole Lockswitch

Tapered Lock Head

90° Indexing





BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-D	90°	90°	1,4	
SRL-5-E	90°	90°	1 Only	
SRL-5-F	180°	90°	1,4,7	

Double Pole Lockswitch

Parallel Lock Head

60° Indexing


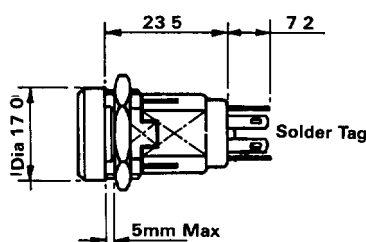


BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-J	60°	60°	1,3	
SRL-5-K	60°	60°	1 Only	

Double Pole Lockswitch

Tapered Lock Head

60° Indexing

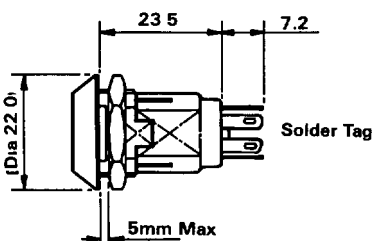

BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-L	60°	60°	1,3	
SRL-5-M	60°	60°	1 Only	