


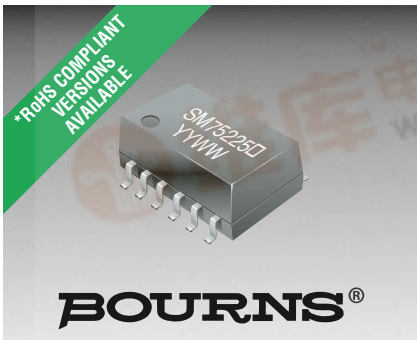

Features

- Compact surface mount packaging
- Operating temperature -40 °C to +85 °C
- PE68825 equivalent
- Lead free version available (see How to Order)
- Lead free versions are RoHS compliant*

Applications

- Telecom

SM75225 - T1/CEPT/ISDN-PRI Dual Transformers

Electrical Specifications @ 25 °C

Turns Ratio $\pm 2\%$ (1-2-3):(12-10).....	1.15 CT:1
Turns Ratio $\pm 5\%$ (4-5-6):(9-8-7)	1 CT:2 CT
Polarity ..1,2 & 12; 4,5,9 & 8 same phase	
OCL (12-10) @ 10 kHz, 0.01 V	1.6 mH min.
OCL (4-6) @ 10 kHz, 0.1 V	1.6 mH min.
OCL (12-10) @ 10 kHz, 0.01 V, -40 °C	0.6 mH min.
OCL (4-6) @ 10 kHz, 0.01 V, -40 °C	0.6 mH min.
Le (12-10) @ 100 kHz, 0.1 V, Short (1-2-3).....	0.8 μ H max.
Le (4-6) @ 100 kHz, 0.1 V, Short (9-8-7).....	0.8 μ H max.
Cww (1-12) @ 100 kHz, 0.1 V	60 pF max.
Cww (4-9) @ 100 kHz, 0.1 V	50 pF max.
DCR (1-3) (Ω max.)	1.00
DCR (12-10) (Ω max.)	1.00
DCR (4-6) (Ω max.)	1.00
DCR (9-7) (Ω max.)	2.00
HIPOT (VAC)	1500


*CT : center tap

Packaging Specifications

Tape & Reel*330 pcs./reel

*"E" suffix at end of part number
designates tape & reel packaging, e.g.
SM75225E.

Product Dimensions

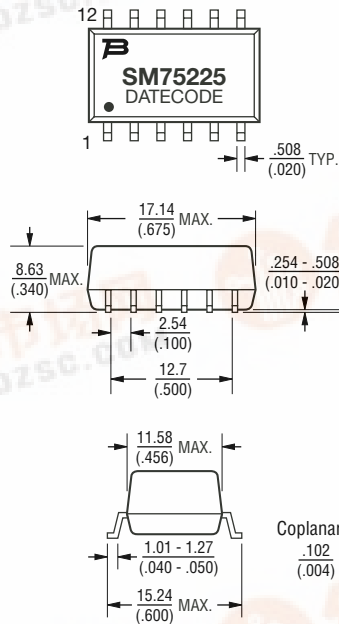


DIMENSIONS ARE: $\frac{\text{MM}}{(\text{INCHES})}$

TOLERANCE: $\pm \frac{0.25}{(.010)}$

NOTE: DIMENSIONS ARE EXCLUSIVE OF SOLDER

Electrical Schematic



How to Order

SM75225E

Model _____
Termination _____
Blank = Tin-lead
L = Tin only (lead free)