

SEMTECH**STANDARD RECOVERY
DOUBLER AND CENTER
TAPS****SCDA05 thru SCDA6
SCNA05 thru SCNA6
SCPA05 thru SCPA6**

January 9, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com


**STANDARD RECOVERY, MEDIUM CURRENT CENTER
TAP AND DOUBLER RECTIFIER ASSEMBLIES****QUICK REFERENCE
DATA**

- Low forward voltage drop
- Low reverse leakage current
- Aluminum case
- Low thermal impedance
- Universal 3-way terminals

- $V_R = 50V - 600V$
- $I_F = 15A$
- $I_R = 1.0 \mu A$
- $V_F = 1.0V$

ABSOLUTE MAXIMUM RATINGS

Device Type		Working Reverse Voltage V_{RWM}	Average Rectified Current						1 Cycle Surge Current $t_p = 8.3mS$		Repetitive Surge Current
			(@ case temperature)			(@ ambient temperature)			25°C	100°C	25°C
			55°C	100°C	125°C	25°C	55°C	100°C			
			Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps
SCDA05		50	↑	↑	↑	↑	↑	↑	↑	↑	
SCDA1		100	↑	↑	↑	↑	↑	↑	↑	↑	
SCDA2		200	7.5	5.0	2.5	2.5	2.0	1.25	150	100	25
SCDA4		400	↓	↓	↓	↓	↓	↓	↓	↓	
SCDA6		600	↓	↓	↓	↓	↓	↓	↓	↓	
SCNA05	SCPA05	50	↑	↑	↑	↑	↑	↑	↑	↑	
SCNA1	SCPA1	100	↑	↑	↑	↑	↑	↑	↑	↑	
SCNA2	SCPA2	200	15.0	10.0	5.0	5.0	4.0	2.5	150	100	25
SCNA4	SCPA4	400	↓	↓	↓	↓	↓	↓	↓	↓	
SCNA6	SCPA6	600	↓	↓	↓	↓	↓	↓	↓	↓	

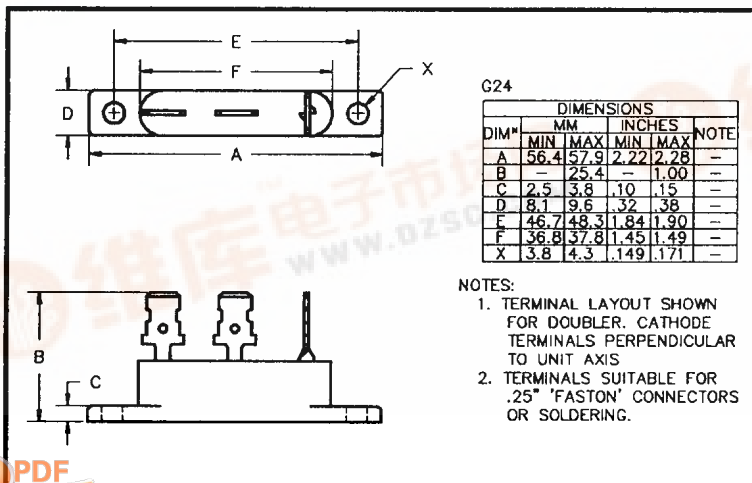MECHANICAL

Maximum thermal impedance
 $R_{\theta JC} = 4^{\circ}C/W$

January 9, 1998

ELECTRICAL CHARACTERISTICS (ratings apply per leg)

Device Type	Reverse Current @ V_{RWM}		Maximum Forward Voltage $V_F @ 3.0A @ 25^\circ C$	Maximum Reverse Recovery Time ¹
	@ $25^\circ C$	@ $100^\circ C$		
	μA	μA	Volts	μS
SCDA05 SCDA1 SCDA2 SCDA4 SCDA6	1.0	20	1.0	2.0
SCNA05 SCPA05 SCNA1 SCPA1 SCNA2 SCPA2 SCNA4 SCPA4 SCNA6 SCPA6	1.0	20	1.0	

¹ Measured on discrete devices prior to assembly

Operating temperature range $-55^\circ C$ to $+150^\circ C$
Storage temperature range $-55^\circ C$ to $+150^\circ C$

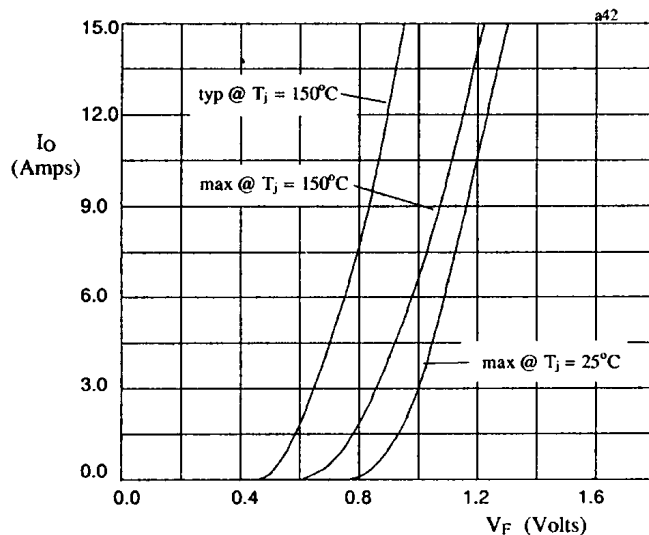


Fig 1. Forward voltage drop against current (per leg)

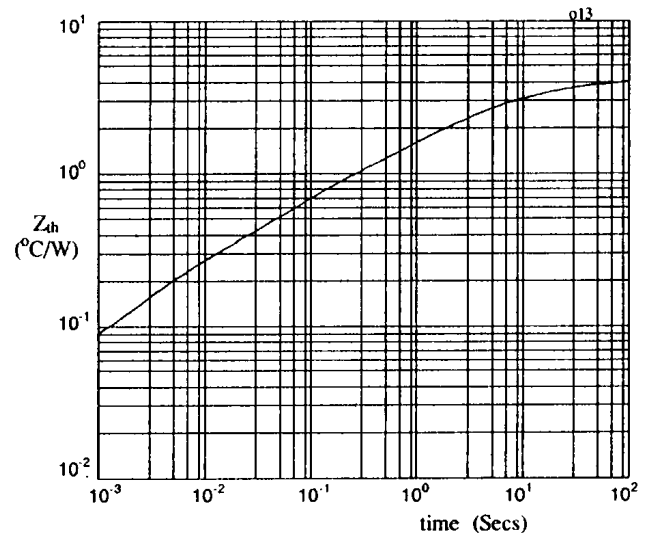


Fig 2. Transient thermal impedance characteristic per leg