



SBG1025L - SBG1030L


10A SCHOTTKY BARRIER RECTIFIER

Features

Guard Ring Die Construction for Transient Protection
 Low Power Loss, High Efficiency
 High Surge Capability
 Very Low Forward Voltage Drop
 For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
Lead Free Finish, RoHS Compliant (Note 2)

Mechanical Data

Case: D²PAK
 Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
 Moisture Sensitivity: Level 1 per J-STD-020C
 Terminals: Finish - Tin. Solderable per MIL-STD-202, Method 208 (E3)
 Polarity: See Diagram
 Marking: Type Number
 Ordering Information: See Page 2
 Weight: 1.7 grams (approximate)

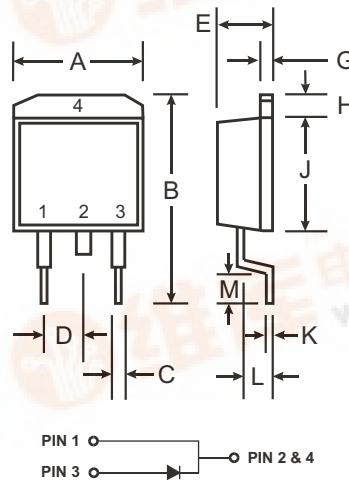

D ² PAK		
Dim	Min	Max
A	9.65	10.69
B	14.60	15.88
C	0.51	1.14
D	2.29	2.79
E	4.37	4.83
G	1.14	1.40
H	1.14	1.40
J	8.25	9.25
K	0.30	0.64
L	2.03	2.92
M	2.29	2.79
All Dimensions in mm		

Maximum Ratings @ T_A = 25 °C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.

Characteristic	Symbol	SBG1025L	SBG1030L	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	25	30	V
RMS Reverse Voltage	$V_{R(RMS)}$	18	21	V
Average Rectified Output Current @ T _C = 120 °C	I _O	10		A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load	I _{FSM}	200		A
Typical Thermal Resistance Junction to Case (Note 1)	R _{JC}	3.0		C/W
Operating Temperature Range	T _J	-65 to +125		°C
Storage Temperature Range	T _{STG}	-65 to +150		°C






Electrical Characteristics @ T_A = 25 °C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 3) SBG1025L SBG1030L	$V_{(BR)R}$	25 30			V V	I _R = 1mA
Forward Voltage	V_{FM}		0.34 0.36 0.55 0.48	0.45 0.36 0.55 0.50	V	@ I _F = 10A, T _C = 25 °C @ I _F = 10A, T _C = 125 °C @ I _F = 20A, T _C = 25 °C @ I _F = 20A, T _C = 125 °C
Peak Reverse Current at Rated DC Blocking Voltage (Note 3)	I _{RM}		150	1.0 260	mA	@ T _C = 25 °C @ T _C = 125 °C
Typical Total Capacitance	C _T		350		pF	f = 1.0MHz, V _R = 4.0V DC, Per Element

Notes: 1. Thermal resistance: junction to case mounted on heat sink.

2. RoHS revision 13.2.2003. High Temperature Solder Exemption Applied, See EU Directive Annex Note 7.

3. Short duration pulse test used to minimize self-heating effect.

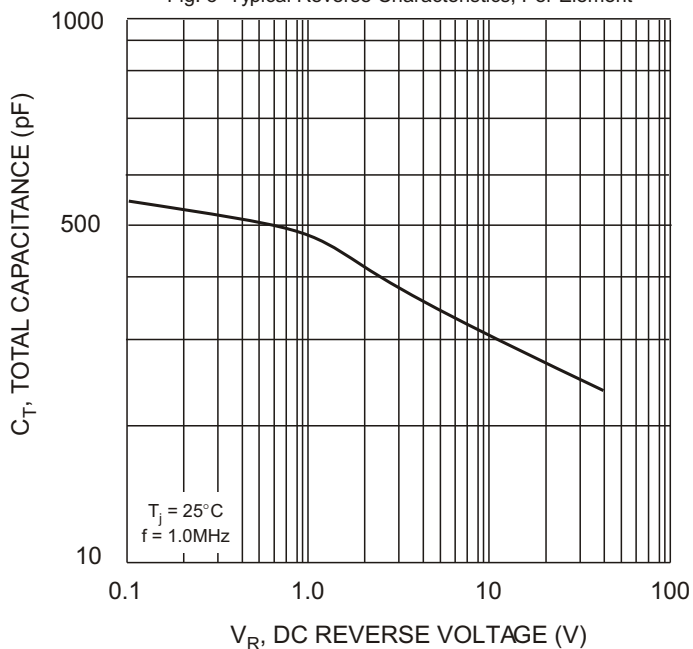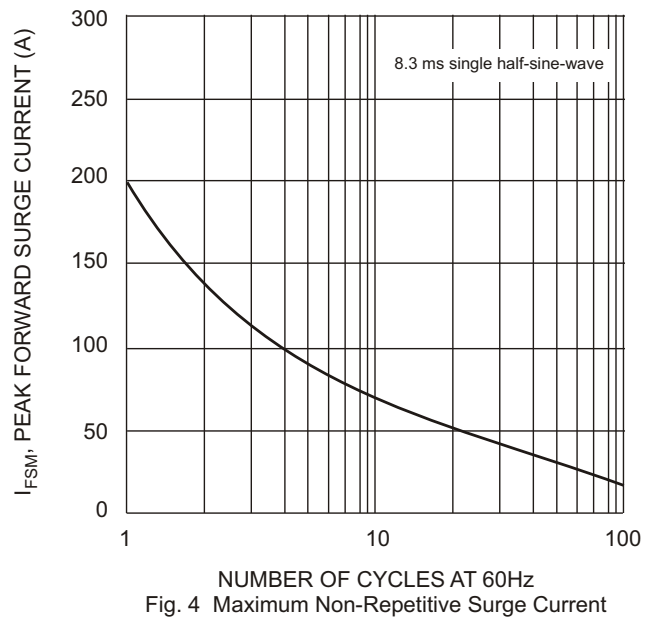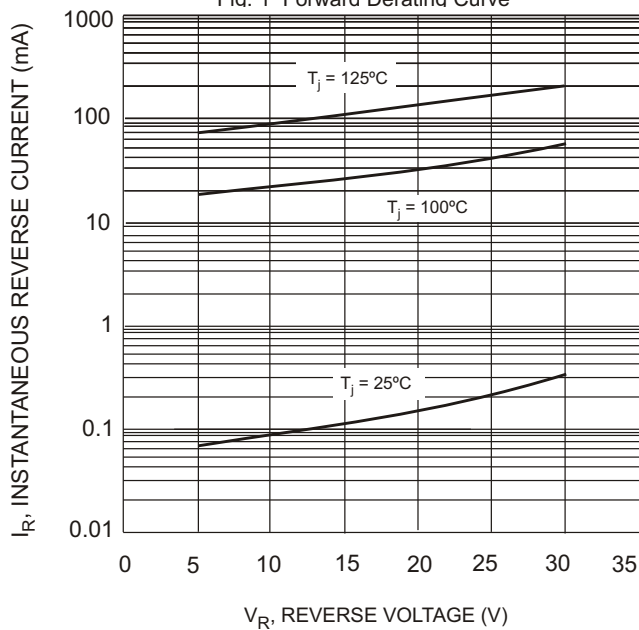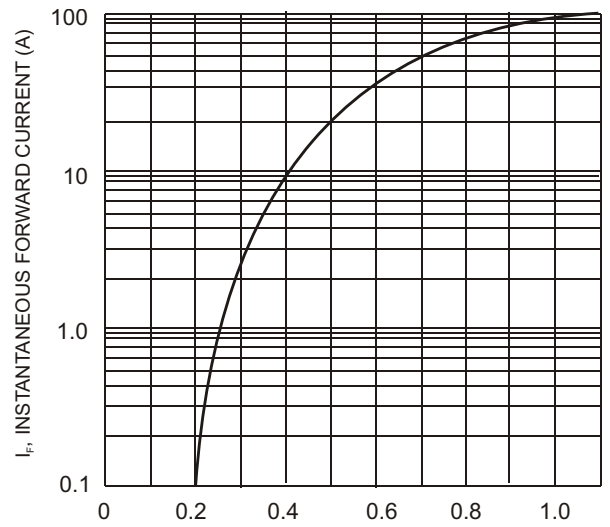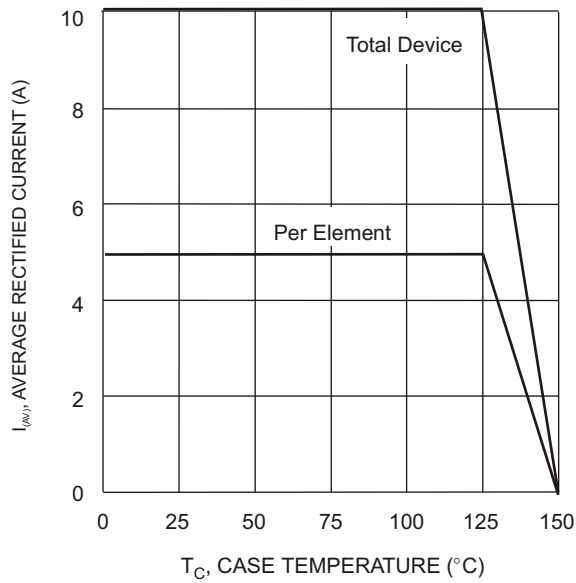



Ordering Information (Note 4)

Device	Packaging	Shipping
SBG1025L-F	D ² PAK	50/Tube
SBG1025L-T-F	D ² PAK	800/Tape & Reel
SBG1030L-F	D ² PAK	50/Tube
SBG1030L-T-F	D ² PAK	800/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



SBG10XXL = Product type marking code (SBG1025L or SBG1030L)
D11 = Manufacturers' code marking
YWW = Date code marking
Y = Last digit of year ex: 2 for 2002
WW = Week code 01 to 52

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.