

RSC-Series




The RSC-Series Super Curvette single pole rocker switches are physically similar to the Curvette Series. These switches offer higher electrical ratings with up to 125 amp peak inrush capability.


Specifications


- Certifications*: UL, CSA, VDE
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Polyester or Nylon

* Due to ongoing technological advances, consult factory for certification specifics.

Dimensional Specifications: in. [mm]

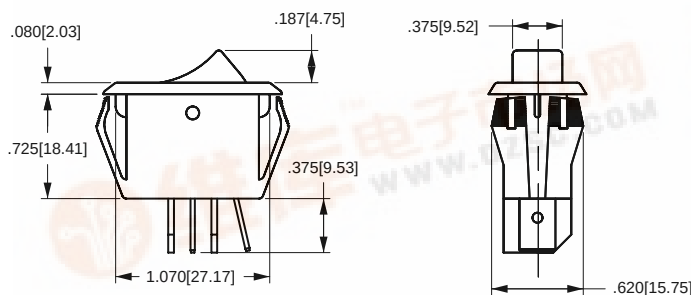

 .250 TAB (Q.C.)	 SOLDER LUG
TERMINAL TYPE	

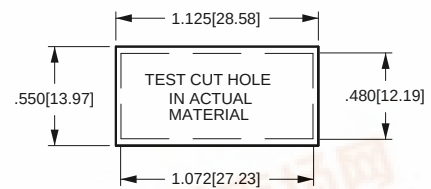

MOUNTING HOLE
Panel Thickness: .025 min. - .187 max.
Specific cutout dimension range dependent on panel thickness and material.
Consult factory.

SERIES	RATING	TERMINATION	BASE COLOR ¹	COLOR OF MOLDED-IN LEGEND AND/OR VISI-ROCKER END ¹
RSC SINGLE POLE	60 15A 250VAC 20A 125VAC 3/4HP 125-250VAC 6(6)A 250VAC 50E3 T85	0 SOLDER LUG 1 .250TAB (QC)	B BLACK W WHITE	N NOT APPLICABLE B BLACK V VISI-RED W WHITE
CIRCUIT	61 15A 250 VAC 20A 125VAC 6(6)A 250VAC 50E3 T85	ACTUATOR STYLE R ROCKER V TWO COLOR VISI-ROCKER	ROCKER FACE LEGEND	
A OFF-NONE-ON B ON-NONE-ON	70 15A 250VAC 20A 125VAC 3/4HP 125-250VAC 16(6)A 250VAC T85	ACTUATOR COLOR¹ B BLACK W WHITE	MOLDED-IN²	INK TRANSFER STAMP³
	71 15A 250VAC 20A 125VAC 16(6)A 250VAC T85		0 NO LEGEND 1 OFF-ON (VERTICAL) 2 OFF-ON (HORIZONTAL) 8 O-I (HORIZONTAL) 9 O-I (VERTICAL) ON-OFF (VERTICAL) ON-OFF (HORIZONTAL) OFF O-I ON (VERTICAL)	0 A B D E F G H

NOTES:
1. Shading indicates standard configurations.

2. Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

3. Matte finish is standard. Custom colors are available. Consult factory.

4. Molded-in Legend available only with Visi-Rocker option.

5. White is standard with dark actuators; black is standard with light actuators.