

CRYDOM

Control over power

Series RPC

Solid State Proportional Controller
15-40 Amp, 120/240/480 Vac Output

- Uses Potentiometer for Economical Power Control
- Industry Standard Package

The RPC series proportional controllers provide a cost effective method of controlling power in many different applications such as heaters, universal motors or incandescent lamps. A customer provided potentiometer is all that is required for control. All modules are supplied with KS100 protective cover.

8	MODEL	NUMBERS	RPC1215	RPC1225	RPC1240	RPC2415	RPC2425	RPC2440	RPC4815	RPC4825	RPC4840
OUTPUT SPECIFICATIONS ①											
Operating Voltage (47-63 Hz) [Vac]			90-130	90-130	90-130	200-240	200-240	200-240	400-480	400-480	400-480
Max. Load Current ③ [Arms]			15	25	40	15	25	40	15	25	40
Min. Load Current, [mArms]			70	80	90	70	80	90	70	80	90
Transient Overvoltage [Vpk]			400	400	400	600	600	600	1200	1200	1200
Max. Surge Current, (16.6ms) [Apk]			150	250	625	150	250	625	150	250	625
Max. On-State Voltage Drop @ Rated Current [Vpk]			1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
Thermal Resistance Junction to Case [R _{θJC}]			1.48	1.02	.63	1.48	1.02	.63	1.48	1.02	.63
Maximum I ² t for Fusing, (8.3 msec.) [A ² sec]			94	260	1620	94	260	1620	94	260	1620
Max. Off-State Leakage Current @ Rated Voltage [mArms]			10	10	10	7	7	7	3	3	3
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②			500	500	500	500	500	500	500	500	500
Max. Turn-On Time ④ [msec]											
Max. Turn-Off Time [msec]											
Power Factor (Min.) with Max. Load			0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Snubber (Internal)			yes	yes	yes	yes	yes	yes	no	no	no

INPUT SPECIFICATIONS ①

Resistor, Variable [Ohms] ④	150K (1W)	150K (1W)	150K (1W)	1M (1/2W)	1M (1/2W)	1M (1/2W)	1M (1/2W)	1M (1/2W)	1M (1/2W)	1M (1/2W)
-----------------------------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

©2002 CRYDOM CORP, Specifications subject to change without notice.

GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ Heat sinking required, for derating curves see page 2.
- ④ Potentiometer should be selected with regards to line voltage isolation.

WARNING

Control to load is not isolated, exercise care in handling the RPC products to avoid the risk of electric shock.

For recommended applications and more information contact:

USA: Sales Support (877) 502-5500 **Tech Support** (877) 702-7700 **FAX** (619) 710-8540

Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154

Email: sales@crydom.com **WEB SITE:** http://www.crydom.com**UK:** +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 CobhamRoad, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.**GERMANY:** +49 (0)180 3000 506

Series RPC

Solid State Proportional Controller
15-40 Amp, 120/240/480 Vac Output

GENERAL SPECIFICATIONS

Dielectric Strength, All Terminals to Base 2500 Vrms

Ambient Operating Temperature Range -30 to 80°C

Ambient Storage Temperature Range -40 to 125°C

MECHANICAL SPECIFICATIONS

Weight: (typical) 3.2oz. (90g)

Encapsulation: Thermally Conductive Epoxy


Terminals: Screws and Saddle Clamps Furnished, Unmounted

WIRING DIAGRAM



CAUTION
All terminals are
at Line Voltage
Potential.




Variable Resistance

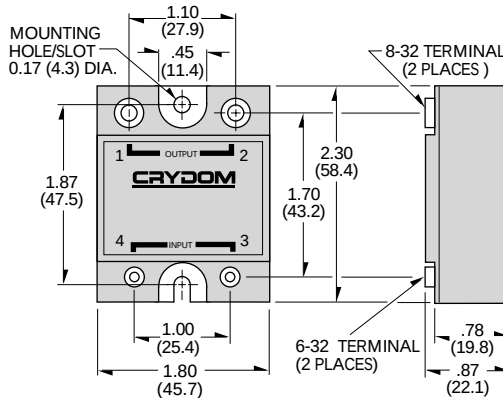




All dimensions are in inches (millimeters)

Screw Torque Requirements:
6-32 Screws - 10 in. lbs.,
8-32 and 10-32 Screws - 20in. lbs.
(Screws dry without grease.)

CURRENT DERATING CURVES

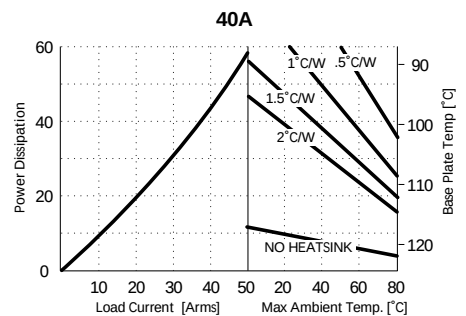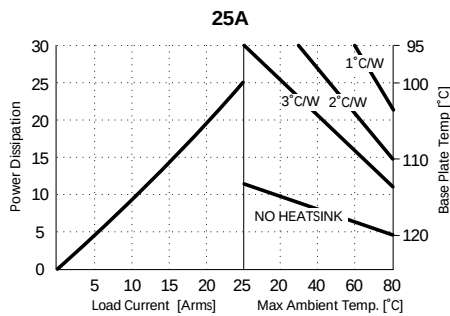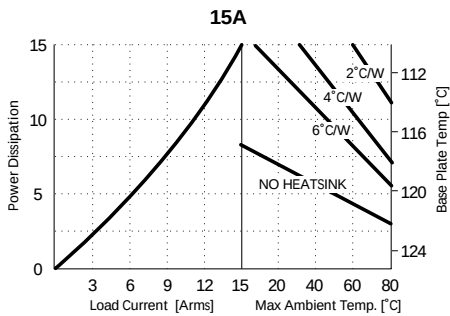

PERCENTAGE ON vs. INPUT RESISTANCE

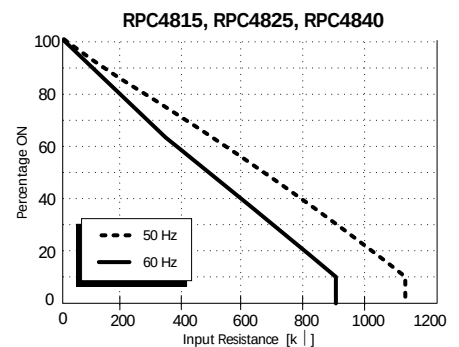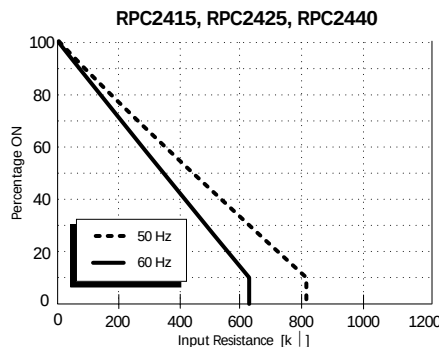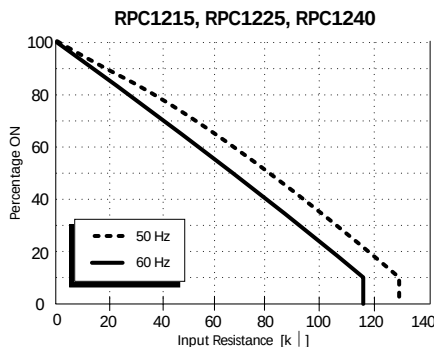

©2002 CRYDOM CORP, Specifications subject to change without notice.